ADValT — Industrial BT Rubber Quality Batch Report


Batch ID: **BT-07585-0** | Generated: 2026-09-09 16:46:00 | Process: AC-10 Autoclave

Batch Evaluation	Golden Batch Score	Process Adherence	Quality Score
WARNING	79.3%	63.5%	95.2%

11 Predicted Laboratory Quality Parameters

Parameter	Predicted Value	Specification (LSL - USL)	Target	Status
AC Mooney	63.32 MU	[50.0 - 60.0]	55.0	Above specification
Ash%	5.99 %	[3.0 - 7.0]	5.0	Within range
CB%	30.39 %	[28.0 - 36.0]	32.0	Within range
AE%	7.40 %	[6.0 - 12.0]	9.0	Within range
VM%	0.16 %	[0.0 - 1.0]	0.2	Within range
RHC	56.19 %	[50.0 - 100.0]	56.0	Within range
Specific Gravity	1.15 g/cc	[1.12 - 1.16]	1.14	Within range
Mv	40.59 MU	[30.0 - 45.0]	37.5	Within range
TS	82.73 kg/cm2	[75.0 - 150.0]	88.0	Within range
EB	500.30 %	[480.0 - 750.0]	520.0	Within range
Hardness	49.98 Shore A	[48.0 - 54.0]	51.0	Within range

Process Adherence Radar Comparison

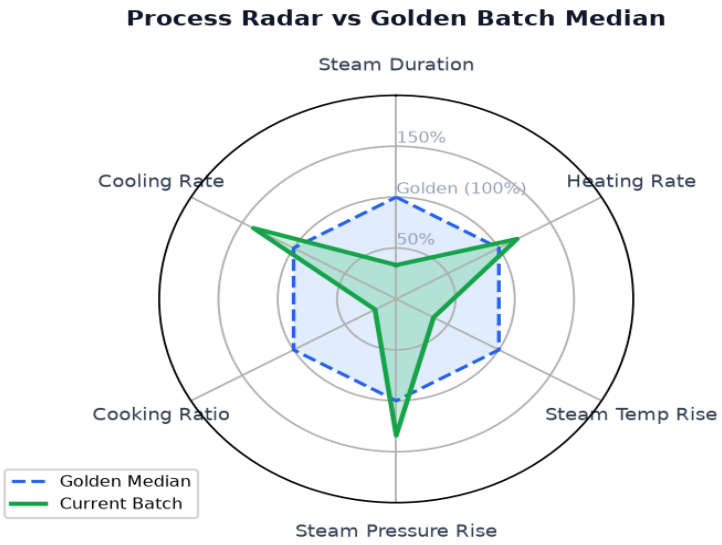

Batch Process Timeline Milestones

Milestone Stage	Clock Time	Elapsed Minutes from Start
Start	04:30	+0.0 min
Steam Open	11:13	+403.0 min
Cooking	11:13	+403.0 min

Steam Close	11:17	+407.0 min
Cooling	13:35	+545.0 min
Bottom Door	14:08	+578.0 min
End	15:27	+657.0 min

Key Industrial Engineered Process Features

Feature Name	Calculated Value	Feature Name	Calculated Value
Steam Duration	4.0	Heating Rate	3.0
Steam Temp Rise	12.0	Steam Pressure Rise	6.65
Cooking Duration Verified	136.0	Cooking Ratio	0.207
Cooling Delay	6.0	Cooling Rate	2.1667
Thermal Exposure Score	20400.0	Low Tf Ratio	2.6691
Batch Duration Deviation	652.0	Total Batch Duration	657.0