



VR Driving Learning Simulator

Student Name: Ritvik Babre
Roll Number: 242190002

Project report submitted in partial fulfilment of the requirements
for the Degree of M.Tech. in Computer Engineering (Specialized in Software Engineering)

on November 20, 2025

Project Guide
Dr. V.B.Nikam

Student Declaration

I hereby declare that the work presented in the report entitled "**VR Driving Learning Simulator**" submitted by me for the partial fulfilment of the requirements for the degree of *M.Tech. in Computer Engineering(Specialized in Software Engineering)* at Veermata Jijabai Technological Institute, Mumbai, is an authentic record of my work carried out under the guidance of **Dr. V.B.Nikam**. Due acknowledgements have been given in the report for all material used. This work has not been submitted elsewhere for the reward of any other degree.

Ritvik Babre

Place & Date: November 20, 2025

Certificate

This is to certify that the above statement made by the candidate is correct to the best of my knowledge.

Dr. V.B.Nikam

Place & Date: November 20, 2025

Contents

Student Declaration	i
Table of Contents	iv
Abstract	v
1 Introduction	1
1.1 Background and Motivation	1
1.2 Problem Statement	2
1.3 Research Objectives	2
1.4 Scope and Limitations	3
1.4.1 In Scope	3
1.4.2 Out of Scope	3
1.5 Document Organization	4
2 Literature Review	5
2.1 Research Gap Analysis	9
2.1.1 Hardware and Physical Interaction Fidelity	9
2.1.2 Methodological and Sample Limitations	9
2.1.3 Pedagogical and Training Effectiveness	10
2.1.4 Technical and Realism Constraints	10
2.1.5 Regulatory, Ethical, and Commercialization Gaps	10
2.1.6 Summary of Research Gaps	11
3 System Analysis and Design	12
3.1 Overview	12
3.2 Requirements Analysis	12
3.2.1 Functional Requirements	12
3.2.2 Non-Functional Requirements	14
3.3 Constraints and Design Trade-offs	14
3.3.1 Hardware Constraints	14

3.3.2	Software and Performance Constraints	15
3.4	Design Alternatives and Justification	16
3.4.1	VR Platform Selection	16
3.4.2	Game Engine Selection	16
3.4.3	Control Input Architecture	17
3.5	System Objectives	17
3.6	Comparative Analysis with Existing Solutions	17
3.7	System Components and Architecture	18
3.7.1	Hardware Interface Subsystem	18
3.7.2	Software Simulation Subsystem	19
3.7.3	VR Interface Subsystem	19
3.8	System Architecture Diagram	20
3.9	Design Rationale Summary	21
3.10	Workflow and Operational Flow	22
3.10.1	Detailed Functional Flow	23
4	Proposed Methodology	25
4.1	Overview	25
4.2	Development Phases	25
4.2.1	Phase 1: Hardware Prototype Development (Weeks 1-4)	25
4.2.2	Phase 2: Unity 6 VR Environment Setup (Weeks 3-6)	26
4.2.3	Phase 3: Vehicle Physics and Environment Modeling (Weeks 5-10)	26
4.2.4	Phase 4: Training Features and Assessment System (Weeks 9-12)	27
4.2.5	Phase 5: User Testing and Refinement (Weeks 11-14)	28
4.3	Evaluation Metrics	28
4.3.1	Technical Performance Metrics	28
4.3.2	User Experience Metrics	29
4.3.3	Training Effectiveness Metrics (Future Work)	29
4.4	Testing Procedures	29
4.4.1	Hardware Validation Tests	29
4.4.2	Software Validation Tests	29
4.4.3	User Study Protocol	30
4.5	Risk Mitigation	30
4.5.1	Technical Risks	30
4.5.2	User Experience Risks	31
4.5.3	Development Risks	31
4.6	Expected Outcomes	31

5 Conclusion and Future Work	32
5.1 Summary	32
5.2 Research Contributions	32
5.3 Limitations and Challenges	33
5.4 Future Work	34
5.4.1 Short-Term Enhancements (6-12 Months)	34
5.4.2 Medium-Term Research (1-2 Years)	34
5.4.3 Long-Term Vision (3-5 Years)	35
5.5 Broader Impacts	35
5.6 Final Remarks	36
Bibliography	37

Abstract

Traditional driver training methods face significant limitations in terms of safety, cost, and scalability, particularly when training on high-end vehicles or in hazardous scenarios. This project proposes the design and development of a high-fidelity Virtual Reality (VR) driving simulator for driving schools, leveraging the Meta Quest 3 platform and custom Bluetooth-enabled physical controls. The proposed system addresses critical research gaps identified in current VR driving simulators: lack of affordable high-fidelity systems with realistic haptic feedback, absence of wireless control integration, limited dual-mode transmission support (automatic and manual), and insufficient validation for educational applications. The simulator integrates custom-built steering wheel, pedal assembly, and gear shifter hardware connected via ESP32 Bluetooth microcontroller, providing realistic tactile feedback while maintaining system cost below \$5,000. The software architecture utilizes Unity 6 game engine to deliver photorealistic vehicle models, accurate physics simulation, and immersive spatial audio at 90+ FPS. The system is designed to support both standalone Quest 3 operation and PC-tethered mode, with comprehensive performance logging and automated assessment capabilities aligned with RTO certification standards. This paper presents the literature review, gap analysis, system requirements, proposed architecture, and design rationale that justify technical decisions. The proposed simulator aims to provide driving schools with a scalable, safe, and cost-effective training platform capable of simulating diverse scenarios including urban driving, highway navigation, emergency response, and luxury vehicle operation that would otherwise be impractical in traditional training environments.

Keywords: Virtual Reality, Driving Simulator, Driver Training, Meta Quest 3, ESP32, Bluetooth Controls, Unity 6, Driver Education, Autonomous Vehicles, Haptic Feedback

Chapter 1

Introduction

1.1 Background and Motivation

The integration of Virtual Reality (VR) technologies in driver training has emerged as a transformative approach to creating realistic and safe learning environments. Traditional driving instruction faces persistent limitations including safety concerns during hazardous scenario training, prohibitive vehicle costs for diverse fleet exposure, environmental constraints limiting practice opportunities, and scalability challenges for growing driving school enrollment. These limitations are particularly acute when training involves high-end or luxury vehicles such as Mercedes-Benz, BMW, or Audi models, where operational costs, insurance premiums, and maintenance expenses render traditional hands-on training economically impractical for most driving schools [4].

Recent advancements in consumer VR hardware, particularly standalone headsets such as the Meta Quest 3, have reached performance and affordability thresholds enabling deployment in educational contexts. Modern VR systems deliver stereoscopic rendering at 90-120 frames per second with sub-20ms motion-to-photon latency, field-of-view exceeding 100 degrees, and inside-out tracking eliminating external sensor requirements. Concurrently, embedded microcontroller platforms (ESP32, STM32) offer Bluetooth Low Energy connectivity, sufficient processing power for sensor fusion, and sub-\$10 unit costs, enabling affordable wireless control hardware development.

This convergence of technologies creates an opportunity to develop highly immersive driving simulations that closely replicate real-world vehicle dynamics, visual fidelity, and driver feedback at price points accessible to educational institutions. This project proposes the design and development of a **VR-Based Driving Simulator for Driving Schools**, focusing on realistic vehicle simulations with custom-built input hardware—including a Bluetooth-connected steering wheel, accelerator, brake, and clutch assembly—providing tactile feedback and supporting both automatic and manual transmission modes.

1.2 Problem Statement

Despite growing interest in VR driving simulation, current systems exhibit critical limitations that hinder educational adoption:

1. **High Cost Barriers:** Commercial driving simulators often exceed \$50,000-\$200,000 per unit, placing them beyond the financial reach of most Indian driving schools where per-student tuition fees average 5,000-10,000 (\$60-\$120 USD)
2. **Wired Control Constraints:** Most affordable VR driving solutions rely on USB-connected gaming steering wheels, requiring PC tethering, limiting portability, and reducing immersion through visible cable management
3. **Automatic-Only Focus:** Existing educational VR simulators predominantly simulate automatic transmissions, neglecting the manual transmission proficiency required in India where over 85% of vehicles sold have manual gearboxes
4. **Entertainment vs Education Gap:** Commercially available simulators target entertainment (racing games) rather than driver education, lacking structured curricula, performance assessment tools, and alignment with Regional Transport Office (RTO) testing standards
5. **Limited Validation:** Few studies demonstrate empirical transfer of VR training to real-world driving performance, creating uncertainty about pedagogical effectiveness and return on investment for driving schools

There exists a clear need for a modular, scalable, and hardware-accurate VR driving simulator that bridges the affordability gap, eliminates wired constraints, supports comprehensive transmission training, and provides assessment frameworks aligned with regulatory standards—all while maintaining the realism necessary for effective skill transfer.

1.3 Research Objectives

The primary objective of this project is to design and validate a high-fidelity VR driving simulator that provides an immersive, realistic, and pedagogically effective training experience at a total system cost under \$5,000. The specific research objectives are:

1. **System Architecture Design:** Develop a modular VR simulation architecture integrating Meta Quest 3 headset, Unity 6 game engine, and custom ESP32-based Bluetooth control hardware with documented latency, frame rate, and reliability specifications
2. **Realistic Vehicle Simulation:** Implement physics-based vehicle dynamics accurately modeling acceleration, braking, steering response, and transmission behavior for both automatic and manual modes, validated against manufacturer specifications

3. **Wireless Control Integration:** Design and prototype Bluetooth-enabled steering wheel and pedal assembly with sub-50ms input latency, 4+ hour battery life, and seamless device pairing
4. **Performance Assessment Framework:** Create automated evaluation system measuring lane adherence, speed control, signal compliance, and safe driving behaviors aligned with Indian RTO testing criteria
5. **Training Scenario Development:** Build diverse scenario library including urban navigation, highway driving, parking maneuvers, and emergency responses with adjustable difficulty and traffic density
6. **Usability Validation:** Conduct pilot user studies measuring simulator sickness (SSQ), system usability (SUS), presence, and qualitative feedback from driving instructors and learners
7. **Cost-Benefit Analysis:** Document component costs, development effort, and projected per-student training cost compared to traditional vehicle-based instruction

1.4 Scope and Limitations

1.4.1 In Scope

The system development encompasses:

- Standalone Meta Quest 3 VR application with PC-tethered mode as fallback
- Simulation of 3-5 vehicle models representing common luxury/high-end categories
- Indian urban and highway environments with RTO-compliant signage and road markings
- Both automatic (P, R, N, D) and manual (1-6 gears + clutch) transmission modes
- 10+ structured training scenarios mapped to driving school curriculum
- Automated performance logging and PDF report generation
- Instructor dashboard for session monitoring and control
- Pilot testing with 15-20 participants for usability and technical validation

1.4.2 Out of Scope

The following are explicitly excluded from the current project phase:

- Force feedback steering wheel (cost and complexity constraints)
- Motion platform or vestibular simulation (budget limitations)

- Multi-user networked scenarios (focus on single-learner training)
- Official RTO certification (requires long-term validation and regulatory advocacy)
- Real-world driving test outcome measurement (requires longitudinal study beyond project timeline)
- Commercial deployment infrastructure (licensing, technical support, mass production)

1.5 Document Organization

The remainder of this document is organized as follows:

Chapter 2 (Literature Review): Presents a comprehensive synthesis of 23 research papers on VR driving simulation, autonomous vehicle training, physiological monitoring, and simulator design. Includes tabular summary of key findings, gaps, and relevance, followed by systematic gap analysis identifying 15 specific research gaps across hardware, methodology, pedagogy, technical, and regulatory domains.

Chapter 3 (System Analysis and Design): Details functional and non-functional requirements derived from gap analysis and educational needs. Presents design alternatives comparison (VR platforms, game engines, control architectures) with justified selections. Includes system architecture, component specifications, operational workflow, and design rationale explicitly mapping technical decisions to research gaps.

Chapter 4 (Proposed Methodology): Outlines five-phase development plan (hardware prototyping, Unity environment setup, physics modeling, training features, user testing) with deliverables, timelines, and evaluation metrics. Defines technical performance benchmarks, user experience measures, testing procedures, and risk mitigation strategies.

Chapter 5 (Conclusion and Future Work): Summarizes research contributions, acknowledges limitations, and presents three-tier future work roadmap (short-term enhancements, medium-term research validation, long-term commercialization and regulatory certification). Discusses broader impacts on road safety, educational access, and research community.

References: Comprehensive bibliography of cited literature using biblatex with consistent IEEE-style formatting.

This structured presentation aims to provide both academic rigor through literature grounding and practical feasibility through detailed technical planning, positioning the project for successful implementation and potential contribution to the driver training technology landscape.

Chapter 2

Literature Review

Textual Synthesis

Interaction fidelity (high-fidelity setups with steering wheel and pedals) consistently improves training transfer, takeover performance, and user trust in automated driving scenarios. Gamification and in-car tasks maintain or increase driver vigilance; game performance metrics show promise as indirect measures of driver engagement and state monitoring. Physiological measures such as electrodermal activity (EDA) and pupil size provide objective evidence of engagement and vigilance when users perform AR/VR tasks in autonomous vehicles. Visual acuity—particularly dynamic visual acuity (DVA)—is linked to driving performance and can be effectively studied using VR simulations. Motion sickness and simulator sickness remain under-investigated in many studies and should be considered when designing longer-duration VR training protocols. Many studies rely on small, often homogeneous samples, limiting generalizability; future work should include more diverse and larger participant pools.

Tabular Summary of Reviewed Studies

Title (Year)	Authors	Key Findings	Gaps / Limitations	Relevance / Context
Virtual Reality Tour for First-Time Users of Highly Automated Cars: Comparing the Effects of Virtual Environments with Different Levels of Interaction Fidelity (2021) [4]	Rayan Ebnali Harari, Richard Lamb, Razieh Fathi, Kevin Hulme	High-Fidelity VR with steering wheel/pedals improved automation trust, takeover time, and takeover quality vs. Low-Fidelity VR.	Participants expected takeover events, short 1-hour sessions, limited generalization to SAE L3/L4.	Shows that high interaction fidelity boosts motor-skill transfer in VR training for automated driving.
Feasibility of AR-VR Use in Autonomous Cars for User Engagements and its Effects on Posture and Vigilance During Transit (2023) [13]	Joseph Muguro, Pringgo Widyo Laksono, Yuta Sasatake, Muhammad Ilhamdi Rusydi, Kojiro Matsushita, Minoru Sasaki	VR tasks kept users alert based on EDA and pupil size. Delay in hazard recognition > 1s. Mixed tasks improved posture.	Very small sample (15), limited scenarios, motion sickness not analyzed.	Physiological proof that VR/AR interactions help maintain vigilance in ADS.
User Monitoring in Autonomous Driving System Using Gamified Task: A Case for VR/AR In-Car Gaming (2021) [14]	Joseph K. Muguro, Pringgo Widyo Laksono, Yuta Sasatake, Kojiro Matsushita, Minoru Sasaki	Gamified AR tasks didn't hurt hazard detection. Game score trends help estimate user state. Gaze data showed focused attention.	VR simulation instead of real vehicle; small student sample (13).	Supports use of VR/AR gamification to track user state and maintain attention.

Continued on next page

Table 2.1 – continued from previous page

Title (Year)	Authors	Key Findings	Gaps / Limitations	Relevance / Context
Driving Performance Evaluation Correlated to Age and Visual Acuities Based on VR Technologies (2020) [9]	Sooncheon Hwang, Sunhoon Kim, Dongmin Lee	Dynamic Visual Acuity predicted unsafe driving better than Static VA. Poor DVA = higher lane deviation.	Small sample (65), VR differs from real driving, same thresholds for SVA/DVA.	Shows VR's usefulness for testing how vision affects driving behavior.
VR-based Dataset for Autonomous-Driving System (2020) [22]	Shouwen Yao, Jiahao Zhang, Yu Wang	VR used to build a large and varied autonomous-driving dataset with auto-generated labels for 2D and 3D data. Human-in-the-loop VR driving captured stereo video, LiDAR, GPS across many environments and conditions.	Accuracy limited by reliance on VR sensor models and physics; still differs from real-world driving; realism constraints in simulation.	Helpful for generating large, consistent, low-cost datasets to train and test autonomous-driving algorithms in controlled scenarios.
The Effects of Age, Gender, and Control Device in a Virtual Reality Driving Simulation (2020) [2]	Wen-Te Chang	Age strongly influenced VR driving/navigation performance; young participants outperformed seniors. Straight (easy) routes gave higher scores than curved (difficult) ones. Young males performed better than young females; seniors showed no gender difference. Handlebar device improved performance only in young users, not seniors.	Seniors adapted slowly to VR; only two task types; limited VR realism; control devices not designed specifically for seniors.	Useful for understanding how age, gender, and input devices affect VR driving performance—important for designing VR training or in-car interfaces for diverse user groups.
Predicting Perceived Realism in Virtual Reality Driving Simulations Using Participants' Personality Traits, Heart Rate Changes, and Risk Preference (2024)	Uijong Ju, Sanghyeon Kim	Psychopathy and Machiavellianism negatively correlated with perceived realism; heart rate increases and risky decision-making were positively correlated. Tree-based ML (random forest, gradient boosting) predicted perceived realism best when using significant offline features; online-only models showed different strengths.	Sample skewed toward young men; events occurred once per participant; moderate baseline realism due to lack of motion cues and complex traffic; limited generalizability.	Demonstrates how personality and physiological metrics predict perceived realism and offers ML methods to model realism — valuable for adaptive VR training and improving validity of driving simulations.
Quantitative Analysis of Cognitive Load Test While Driving in a VR vs Non-VR Environment (2019) [15]	Zeeshan Qadir, Eashita Chowdhury, Lidia Ghosh, Amit Konar	EEG-based cognitive load comparison showed VR driving produced higher brain activation (prefrontal, frontal, parietal) and higher cognitive load across all driving actions. Proposed CIT2FS classifier achieved higher accuracy in VR (avg 86.1%) vs non-VR (78.9%). VR improved classification of accident, steering, braking, etc.	Small participant pool (11); short 15-min sessions; limited ecological validity; tested only one VR hardware setup; no qualitative user-experience evaluation.	Shows VR induces stronger cognitive load and yields more accurate EEG-based driver-state classification, supporting VR's value for studying cognitive load and training autonomous-driving safety systems.
Comparison of Teleportation and Fixed-Track Driving in VR (2019) [12]	Páll J. Líndal, Kamilla Rún Jóhannsdóttir, Unnar Kristjánsson, Nina Lensing, Anna Stühmeier, Annika Wohlan, Hannes H. Vilhjálmsson	Teleportation caused significantly less simulation sickness and maintained more positive attitudes toward VR compared to fixed-track driving. Heart-rate patterns suggested higher mental effort during teleportation, but overall comfort was better.	Focused on locomotion comfort, not driving skill; urban exploration task, not a driving-specific simulator; VR duration differences between groups influenced sickness.	Helps justify why VR training environments must carefully choose locomotion methods. Supports our claim that "comfortable VR motion" is essential before teaching driving skills in VR—reducing sickness improves training acceptance, user trust, and realism.
Driving Simulator Using Virtual Reality Tools Combining Sound, Vision, Vibration, and Motion (2024) [5]	Juan Camilo Gil-Carvajal, Eun Soo Jo, Dong Chul Park, Wookeun Song, Cheol-Ho Jeong	Multimodal VR driving simulator tested with sound (headphones vs loudspeakers), motion, and vibration. Motion + vibration significantly boosted immersion and powerfulness; motion contributed more than vibration. 64-speaker ambisonics gave best sound-localization accuracy; headphone-based audio (no head-tracking) performed worst. Sound reproduction method did not significantly change immersion/powerfulness.	Small sample sizes (10–20 per experiment); no individualized HRTFs; no head-tracking in headphone playback; motion platform may introduce unintended vibrations; realism limited by recording setup and controlled scenarios.	Strong support for using multi-sensory VR (motion + vibration + visuals) to achieve high-immersion driving experiences. Helps justify including motion cues in our project and shows why audio-localization fidelity matters for realism in VR driving simulations.

Continued on next page

Table 2.1 – continued from previous page

Title (Year)	Authors	Key Findings	Gaps / Limitations	Relevance / Context
Evaluating VR Driving Simulation from a Player Experience Perspective (2017) [19]	Marcel Walch, Philipp Hock, Julian Frommel, David Döbelstein, Katja Rogers, Michael Weber, Felix Schüssel	VR increased real-world dissociation and was preferred by participants, but did not significantly improve immersion, presence, enjoyment, or driving performance compared to triple-screen setups. VR caused slightly higher discomfort. Driving times were similar across both conditions.	Small sample (18 after exclusions); relied on racing-game software; limited realism (no traffic, constrained track); VR HMD had smaller FOV; results based on self-reported questionnaires; possible survey fatigue.	Useful for showing that VR is not automatically superior to flat-screen simulators. Supports our argument that VR must be designed carefully—comfort, FOV, realism, and matching physical/virtual controls matter for effective training in autonomous-driving contexts.
HMD-Based VR Tool for Traffic Psychological Examination: Conceptualization and Design Proposition (2021) [11]	Vojtěch Juřík, Václav Linkov, Petr Dečký, Sára Klečková, Edita Chvojková	Paper proposes a VR-based system for traffic-psychological exams using HMDs + eye-tracking + haptic driving interface. Highlights that VR can measure complex driver traits like situational awareness, distraction, fatigue, and hazard perception more effectively than traditional tests. Emphasizes that VR enables controlled, repeatable scenarios and richer behavioural/physiological data.	Conceptual (not experimentally validated), no user study, no empirical performance data, proposed system not implemented, relies on future development of affordable ET-enabled HMDs.	Useful as a theoretical foundation showing why VR is suitable for driver assessment, supporting our justification for using VR in automated-driving research and training. Reinforces the value of eye-tracking, haptics, and controlled VR environments.
Evaluation of the Training Effect of the Driving Simulator + VR on Driving School Trainees (2022) [8]	Chenxi He, Yiping Wu, Xiaohua Zhao, Yang Ding, Shuo Liu	Study with 119 driving-school trainees showed strong improvements in reaction, knowledge, driving behaviour, and exam pass rates using a combined VR + simulator training system.	Limited to trainees; no long-term retention or real-world transfer tracking.	Strong evidence that VR + simulator fusion improves driving-school outcomes and supports using VR for driver-training effectiveness.
Analyzing the Inconsistency in Driving Patterns Between Manual and Autonomous Modes Under Complex Driving Scenarios with a VR-Enabled Simulation Platform (2022) [21]	Zheng Xu, Yihai Fang, Nan Zheng, Hai L. Vu	VR-based naturalistic platform + ML-driven AV model compared human vs. AV behavior. AV maintained stable speed and low accident rate (~1%), while humans hesitated and made unsafe maneuvers. 81% of drivers intervened due to low trust.	AV struggled in new environments until 60 iterations; TTC threshold unreliable; small sample (18); limited VR realism; only Level-4 autonomy tested.	Shows VR is effective for analyzing human–AV trust, intervention behavior, and differences between human-driven and autonomous patterns.
Electrogastrography in Autonomous Vehicles—An Objective Method for Assessment of Motion Sickness in Simulated Driving Environments (2021) [18]	Ekaterina Trofimova, Timo Koch, Thomas Ludwig	EGG reliably detected motion-sickness onset in VR autonomous-vehicle rides. Dynamic routes increased abnormal gastric rhythms and sweating; button-press self-reports matched physiological data. Heart rate was less useful.	Small sample; VR motion realism limits; only Level-5 scenario tested; EGG requires careful sensor placement.	Shows VR can objectively measure passenger discomfort using physiological signals—useful for evaluating comfort in AV/VR driving research.
Stopping Behavior in a VR Driving Simulator: A New Clinical Measure for the Assessment of Driving (2005) [16]	Maria T. Schultheis, Lisa K. Simone, Emily Roseman, Richard Nead, Jose Rebimbas, Ronald Mourant	VR simulator captured detailed stop-sign behavior differences between adults with and without acquired brain injury (ABI). ABI group showed more missed stops, longer learning curves, and different stopping distances.	Small sample (24); outdated VR hardware; focused only on stop-sign behavior; excludes participants with simulation sickness.	Demonstrates VR's ability to measure fine-grained driving performance, supporting its use for assessing impaired or at-risk drivers.
The Static and Dynamic Analyses of Drivers' Gaze Movement Using VR Driving Simulator (2022)	Jiyong Chung, Hyeok-min Lee, Hosang Moon, Eunghyun Lee	Compared novice vs. experienced drivers using VR + eye-tracking. Novices had longer dwell times, longer fixations, narrower visual search, lower stationary gaze entropy, and simpler gaze-transition patterns. Experienced drivers distributed gaze more evenly and showed higher gaze-transition entropy, indicating richer situational awareness.	Small sample (23 male drivers); only intersection scenario tested; eye-tracking at 30 Hz; only VR-HMD; no diverse age groups or real-road validation.	Shows how VR + eye-tracking reveals differences in attention and hazard detection—useful for VR-based training, risk assessment, and identifying at-risk drivers.

Continued on next page

Table 2.1 – continued from previous page

Title (Year)	Authors	Key Findings	Gaps / Limitations	Relevance / Context
Comparing VR and Non-VR Driving Simulations: An Experimental User Study (2017) [20]	Florian Weidner, Anne Hoesch, Sandra Poeschl, Wolfgang Broll	Compared 2D, S3D, and VR-HMD using the Lane Change Task. Driving performance and physiological responses showed no major differences across display types. VR-HMD caused significantly higher simulator sickness than S3D.	Older VR hardware (Oculus DK2); simple task may not show depth-related differences; mostly young participants; limited vehicle-physics realism.	Shows VR does not automatically improve performance but can increase sickness—important for selecting appropriate VR hardware and scenario design.
Effects of Neuro-Cognitive Load on Learning Transfer Using a VR-Based Driving System (2021) [1]	Usman A. Abdurahman, Shih-Ching Yeh, Yunying Wong, Liang Wei	VR driving simulator + sensors (eye-tracking, pupil dilation, heart rate) showed cognitive load rises on complex routes. Harder routes caused larger pupil dilation, higher heart rate, and more mistakes. ML models reached 97% accuracy in classifying cognitive-load levels.	Conducted only in VR; 98 inexperienced student drivers; sensor noise and missing data; no real-world validation.	Shows VR + physiological sensing can objectively measure mental workload; useful for ADS training, difficulty analysis, and user-state monitoring.
DReyeVR: Democratizing Virtual Reality Driving Simulation for Behavioural & Interaction Research (2022) [17]	Gustavo Silvera, Abhijat Biswas, Henny Admoni	Introduces DReyeVR, an open-source VR driving simulator (Unreal + CARLA) with eye-tracking, head-tracking, mirrors, spatial audio, custom scenarios, logging, and ROS support. Low-cost (\approx 5000) behavioural research platform.	Medium-fidelity (no motion base); consumer VR hardware limits realism; Windows-only SDK; lacks full behaviour-transfer validation.	Highly relevant: enables flexible AV/driver behaviour studies, trust research, hazard-scenario creation, and attention monitoring in VR.
Driving Simulator with VR Glasses for Evaluation of New Interior Concepts (2019) [7]	Bert Hartfiel, Alexander Kroys, Nico Kruithof, Rainer Stark	Volkswagen built a dynamic VR simulator combining an HMD, motion platform, and adjustable physical mock-up. Enables early interior/HMI evaluation with vestibular cues, realistic visuals, adjustable seats/dashboards, and synchronized audio/haptics.	Hard to calibrate motion compensation; HMD tracking issues on moving platform; consumer VR limits fidelity; no behavioural validation; costly engineering setup.	Shows how VR + motion + physical mock-ups support early design, ergonomics testing, visibility checks, and interior-concept validation for driving/AV research.
Freeway Traffic Safety Evaluation Using Virtual Reality: Focus on Compound Curve (2022) [23]	Chi Zhang, Bo Wang, Yongchun Li, Lei Hou, Min Zhang, Changhe Liu, Zilong Xie	Built a VR-based driving simulation + human-computer interaction safety platform to study compound-curve freeway safety. Collected driver heart-rate changes, steering-wheel angle change rate, and driving-trajectory deviation to compute a comprehensive safety index (H). VR allowed testing multiple curve geometries using orthogonal experiments; results identified which curve-design factors significantly impact safety.	Limited to compound curves on Chinese freeway geometry; small participant pool; relies on simulator realism; physiological metrics can vary across individuals; no real-world driving validation.	Relevant because it shows how VR driving simulations can evaluate risky road geometries, analyze driver stability, and measure physiological load—supporting VR as an effective tool for traffic-safety assessment and design evaluation.
Rerun: Enabling Multi-Perspective Analysis of Driving Interaction in VR (2022) [6]	David Goedcke, Harald Haraldsson, Navit Klein, Lunshi Zhou, Avi Parush, Wendy Ju	Introduces Rerun, a Unity-based system that records VR driving interactions and allows full multi-perspective replay (first-person, third-person, observer view). Enables detailed post-hoc study of signalling, communication, and interaction between drivers, especially in multi-user VR driving setups.	No built-in behavioural validation study; relies on StrangeLand simulator; limited to visual replay (no physical cues); requires specific Unity asset (Ultimate Replay).	Useful for analysing driving communication, reconstructing participant interactions, and studying trust/attention in VR driving environments—supports high-detail behavioural evaluation in VR driving research.

Table 2.1: Summary of key prior research on VR and AR systems for driving and autonomous vehicle simulation.

The studies summarized in Table 2.1 collectively indicate that interaction fidelity, physiological engagement monitoring, and gamification significantly influence driver training outcomes and user vigilance. These insights directly inform the system design of the proposed VR-based driving simulator presented in Chapter 3.

2.1 Research Gap Analysis

Based on the comprehensive literature review, several critical research gaps have been identified in the current state of VR-based driving simulation and training systems:

2.1.1 Hardware and Physical Interaction Fidelity

Gap 1: Affordable High-Fidelity Control Systems. While studies [4, 5] emphasize the importance of realistic physical controls (steering wheel, pedals, motion platforms), most high-fidelity systems remain prohibitively expensive for educational institutions and driving schools. There is limited research on developing low-cost (<\$5000), modular, and easily maintainable hardware solutions that preserve haptic realism and force feedback essential for motor skill transfer.

Gap 2: Seamless Bluetooth/Wireless Integration. Existing simulators predominantly rely on wired USB connections or proprietary hardware interfaces. The integration of consumer-grade Bluetooth-enabled control assemblies with minimal latency and reliable pairing mechanisms for VR driving training remains under-explored, particularly for standalone VR headsets like Meta Quest 3.

Gap 3: Dual-Mode Transmission Training. Most studies focus exclusively on either automatic or manual transmission vehicles. The development of a unified VR training platform that seamlessly switches between automatic and manual modes—allowing learners to experience clutch engagement, gear shifting mechanics, and corresponding vehicle dynamics—has not been adequately addressed.

2.1.2 Methodological and Sample Limitations

Gap 4: Small and Homogeneous Participant Samples. A significant majority of reviewed studies [13, 15, 21, 16, 3] suffer from small sample sizes (11–65 participants) and demographic homogeneity (predominantly young male university students). This severely limits the generalizability of findings to diverse driver populations including seniors, female learners, and drivers with varying levels of experience.

Gap 5: Longitudinal Evaluation and Real-World Transfer. Few studies [8] measure long-term skill retention or validate transfer of VR-acquired skills to actual on-road driving performance. Short experimental sessions (15 minutes to 1 hour) do not adequately assess whether VR training produces durable behavioral changes or improves real-world driving safety outcomes.

Gap 6: Motion Sickness and Comfort Over Extended Use. While some studies [12, 18, 20] acknowledge simulator sickness, comprehensive investigations into mitigating VR-induced nausea during extended training sessions (e.g., multi-hour driving school curricula) are lacking. Optimal locomotion methods, frame rates, field-of-view settings, and break schedules for prolonged VR exposure remain understudied.

2.1.3 Pedagogical and Training Effectiveness

Gap 7: Standardized Assessment Metrics for Driver Training. Existing research employs inconsistent evaluation metrics (reaction time, lane deviation, takeover quality, gaze entropy, etc.) [4, 9, 3, 23]. There is no consensus on a unified, validated assessment framework specifically designed for VR-based driver training that aligns with real-world licensing exam standards or regulatory requirements (e.g., RTO testing protocols in India).

Gap 8: Adaptive and Personalized Training Pathways. Most VR driving simulators offer static scenarios with fixed difficulty levels. Research on adaptive training systems that dynamically adjust scenario complexity, traffic density, weather conditions, and hazard frequency based on individual learner performance and cognitive load [1, 10] remains insufficient.

Gap 9: Integration with Driver Education Curricula. Few studies [8] examine how VR simulators can be systematically integrated into existing driving school curricula, including instructor training, lesson planning, regulatory compliance, and cost-benefit analysis for educational institutions.

2.1.4 Technical and Realism Constraints

Gap 10: Photorealistic Graphics and Diverse Environments. While open-source platforms like DReyeVR [17] and datasets [22] provide flexibility, most VR driving simulations lack photorealistic graphics, diverse environmental conditions (urban, rural, highway, adverse weather), and accurate vehicle-specific interior models (e.g., luxury car dashboards, control layouts).

Gap 11: Multi-Sensory Feedback Beyond Vision and Sound. Although [5] demonstrates the value of motion and vibration, affordable integration of comprehensive multi-sensory feedback—including vestibular cues, seat vibrations mimicking road textures, wind simulation, and olfactory cues (e.g., engine smells)—remains technologically and economically challenging for driving schools.

Gap 12: Real-Time Physiological Monitoring for Safety Assessment. While EEG [15], EDA [13], and eye-tracking [3] show promise for cognitive load and attention monitoring, practical, non-invasive, real-time physiological feedback systems integrated into consumer VR headsets for continuous driver state assessment are not commercially available or validated for training environments.

2.1.5 Regulatory, Ethical, and Commercialization Gaps

Gap 13: Regulatory Approval and Certification Standards. There is minimal research on how VR-based training hours can be officially recognized by transport authorities (e.g., RTOs in India, DMVs in the US) as equivalent to on-road training hours. Establishing validation protocols, safety benchmarks, and certification standards for VR driving simulators in compliance with national/international regulations is an open challenge.

Gap 14: Intellectual Property and Patentability Analysis. Despite the commercial potential of VR driving training systems, few studies [11, 17] discuss patent landscapes, prior art analysis, or strategies for protecting novel hardware configurations, software architectures, and training methodologies as intellectual property.

Gap 15: Scalability and Deployment in Developing Countries. Most VR driving research originates from technologically advanced regions (USA, Europe, South Korea, Japan). Limited attention has been given to adapting VR training systems for developing markets with constrained budgets, unreliable power infrastructure, limited technical support, and diverse traffic conditions (e.g., mixed traffic with two-wheelers, pedestrians, and livestock in Indian urban environments).

2.1.6 Summary of Research Gaps

The identified gaps highlight five overarching themes requiring urgent research attention:

1. **Cost-effective, high-fidelity hardware** with wireless connectivity and dual-mode transmission support.
2. **Larger, more diverse longitudinal studies** with validated real-world transfer metrics.
3. **Standardized, adaptive training frameworks** aligned with regulatory requirements.
4. **Enhanced realism through multi-sensory feedback** and photorealistic rendering.
5. **Regulatory certification pathways and IP protection strategies** for commercial deployment.

The proposed VR Driving Simulator project directly addresses Gaps 1, 2, 3, 7, 10, and 13 by developing a modular, Bluetooth-enabled, dual-mode (automatic/manual) training system optimized for Meta Quest 3, with realistic vehicle models, standardized performance metrics, and potential for RTO certification. Subsequent chapters detail the system architecture, implementation, and validation methodology designed to bridge these critical research gaps.

Chapter 3

System Analysis and Design

3.1 Overview

The **VR Driving Simulator** project aims to provide a high-fidelity training and evaluation environment for driving schools. The simulator models real-world driving dynamics using virtual reality and custom-built physical input devices (steering wheel, pedals, and gear shifter). This chapter presents a comprehensive analysis of requirements, constraints, design alternatives, and system architecture that directly address the research gaps and problem statement identified in Chapters 1 and 2.

3.2 Requirements Analysis

3.2.1 Functional Requirements

Based on the identified research gaps and driving school needs, the system must fulfill the following functional requirements:

FR1: Realistic Vehicle Control Input

- Accept analog steering input with proportional angle mapping (0–900° rotation range)
- Process independent accelerator, brake, and clutch pedal inputs with pressure sensitivity
- Support gear selection for both automatic (P, R, N, D) and manual (1–6, Reverse) transmissions
- Maintain input latency < 50ms to preserve motor skill feedback loop [4]

FR2: Immersive Visual and Audio Rendering

- Deliver stereoscopic 3D rendering at minimum 72 FPS per eye to minimize motion sickness [12, 20]

- Provide 90–110° field of view matching Meta Quest 3 specifications
- Implement spatial audio with direction-dependent engine sounds, traffic noise, and ambient effects [5]
- Render photorealistic vehicle interiors (dashboard, mirrors, gear shifter) for high-end car models (Mercedes-Benz, BMW, Audi)

FR3: Accurate Vehicle Physics Simulation

- Model realistic acceleration, braking distances, and cornering dynamics based on vehicle mass, tire friction, and road conditions
- Simulate clutch engagement points, gear ratios, and engine stalling for manual transmission training
- Implement collision detection with appropriate force feedback and damage visualization
- Support dynamic weather conditions (rain, fog) affecting visibility and traction

FR4: Performance Monitoring and Assessment

- Log driving metrics: speed profile, lane deviation, braking smoothness, gear shift timing, steering angle variance
- Generate automated assessment scores based on standardized criteria aligned with RTO testing protocols
- Provide real-time visual/audio feedback for critical errors (e.g., sudden braking, lane violations)
- Export session reports in PDF/CSV format for instructor review

FR5: Scenario Management and Curriculum Integration

- Offer pre-defined training scenarios: urban roads, highways, parking, emergency braking, obstacle avoidance
- Allow instructor-controlled difficulty adjustment (traffic density, time of day, weather)
- Support session pause/resume and instant replay for error analysis
- Maintain user profiles with progress tracking across multiple sessions

3.2.2 Non-Functional Requirements

NFR1: Cost Effectiveness

- Target total system cost < \$5000 (headset + custom hardware + PC) to be affordable for driving schools [17]
- Use consumer-grade components (Meta Quest 3, off-the-shelf sensors, 3D-printable enclosures)
- Minimize recurring costs (no subscription fees for core functionality)

NFR2: Usability and Accessibility

- Enable setup and calibration within 10 minutes by non-technical driving instructors
- Support adjustable seating position and control placements for users 150–200 cm height
- Provide intuitive UI with minimal learning curve for first-time VR users
- Include safety features: guardian boundary system, emergency stop button, comfort-mode reduced motion

NFR3: Reliability and Maintainability

- Ensure Bluetooth connection stability with automatic reconnection on signal loss
- Design modular hardware allowing component replacement without full system disassembly
- Provide diagnostic logs for troubleshooting connection, calibration, and performance issues
- Support firmware updates via wireless OTA for bug fixes and feature enhancements

NFR4: Scalability and Extensibility

- Architecture must support addition of new vehicle models, environments, and training scenarios without core code refactoring
- Enable future integration of motion platforms, haptic seats, or force-feedback steering wheels
- Allow deployment on both tethered PC-VR and standalone Quest mode with adjustable graphics fidelity

3.3 Constraints and Design Trade-offs

3.3.1 Hardware Constraints

C1: VR Headset Limitations

- Meta Quest 3 processing power (Snapdragon XR2 Gen 2) limits polygon count and texture resolution in standalone mode
- Trade-off: Prioritize frame rate stability (72 FPS minimum) over ultra-high-resolution textures to prevent motion sickness
- Solution: Implement dynamic LOD (Level of Detail) and occlusion culling; use PC-VR link for high-fidelity scenarios

C2: Bluetooth Latency and Bandwidth

- Bluetooth 5.0 offers 10–30ms latency but is susceptible to interference in crowded 2.4 GHz spectrum
- Trade-off: Accept slight latency increase versus wired connection complexity and user mobility restrictions
- Solution: Use BLE with custom GATT profiles optimized for low-latency HID data; implement USB fallback mode

C3: Force Feedback Absence

- Custom-built steering wheel lacks motorized force feedback present in high-end simulators (>\$10,000)
- Trade-off: Reduced haptic realism versus significant cost savings (force feedback wheels alone cost \$1000–3000)
- Solution: Compensate with visual cues (steering resistance indicator on HUD), audio feedback (tire squeal), and vibrational alerts via Quest 3 controllers

3.3.2 Software and Performance Constraints

C4: Physics Engine Limitations

- Unity/Unreal default vehicle physics are optimized for gaming, not driver training accuracy
- Trade-off: Computational cost of high-fidelity tire models (e.g., Pacejka Magic Formula) versus frame rate
- Solution: Use simplified but validated physics models (mass-spring damper for suspension, friction circles for lateral grip) with parameter tuning from real vehicle data

C5: Asset Development Budget

- Photorealistic 3D models of licensed vehicle interiors (Mercedes, BMW) require substantial licensing fees or extensive 3D modeling effort

- Trade-off: Generic high-end vehicle interiors versus brand-specific accuracy
- Solution: Model representative "luxury sedan" interior with adjustable branding overlays; prioritize functional accuracy (control placement, mirror angles) over exact brand aesthetics

3.4 Design Alternatives and Justification

3.4.1 VR Platform Selection

Alternatives Considered:

1. **Valve Index + PC:** Pros: Superior FOV (130°), refresh rate (144 Hz), force feedback support. Cons: High cost (\$1000 headset + \$1500 PC), wired tethering limits mobility.
2. **Meta Quest 3:** Pros: Wireless standalone mode, affordable (\$500), inside-out tracking, passthrough AR. Cons: Lower processing power, 90 Hz max refresh rate.
3. **PSVR2 + PlayStation 5:** Pros: Affordable (\$1000 total), haptic feedback in controllers. Cons: Closed ecosystem, limited development flexibility.

Selected: Meta Quest 3 — Justification: Best balance of cost, wireless freedom, and developer accessibility. Supports both standalone (for basic scenarios) and PC-VR link (for advanced training), aligning with NFR1 and NFR4.

3.4.2 Game Engine Selection

Alternatives Considered:

1. **Unity:** Pros: Extensive VR support (XR Interaction Toolkit), large asset store, C# scripting familiarity. Cons: Less advanced default vehicle physics.
2. **Unreal Engine:** Pros: Superior graphics (Nanite, Lumen), Blueprint visual scripting, Chaos vehicle physics. Cons: Steeper learning curve, larger build sizes.
3. **CARLA Simulator:** Pros: Open-source, designed for autonomous driving research, pre-built urban environments [17]. Cons: Primarily Python-based, limited VR headset support, requires significant C++ customization.

Selected: Unity 6 (Latest LTS) — Justification: Unity 6 represents the latest stable release with improved rendering performance, enhanced XR support, and better mobile optimization for Quest 3. Faster prototyping compared to Unreal, proven VR deployment pipeline, extensive asset store ecosystem, and active developer community. Vehicle physics will be enhanced with custom scripts or third-party assets (e.g., Edy's Vehicle Physics, Realistic Car Controller). Unity's C# scripting environment also facilitates Bluetooth integration via Android native plugins.

3.4.3 Control Input Architecture

Alternatives Considered:

1. **Custom PCB with USB HID:** Pros: Lowest latency ($\approx 5\text{ms}$), plug-and-play compatibility. Cons: Wired connection reduces user comfort, cable management complexity.
2. **ESP32 Bluetooth LE:** Pros: Wireless, low power, supports custom GATT profiles, affordable (\$10–20 per unit). Cons: 10–30ms latency, potential interference.
3. **Commercial Racing Wheel (Logitech G29):** Pros: Ready-made, force feedback included. Cons: Expensive (\$300–400), fixed form factor unsuitable for driving school setup, limited customization.

Selected: ESP32 BLE with USB Fallback — Justification: Wireless operation enhances user experience (NFR2), modular design allows independent sensor upgrades (NFR3), and USB mode ensures reliability during demonstrations or competitions. Custom firmware enables latency optimization ($\approx 20\text{ms}$ achievable).

3.5 System Objectives

Based on the requirements analysis and design trade-offs, the system objectives are:

- To design a modular VR-based driving simulation environment replicating realistic car control and behavior.
- To integrate Bluetooth-enabled hardware input devices for steering, acceleration, braking, and gear shifting with latency $< 50\text{ms}$.
- To ensure compatibility with the Meta Quest 3 headset (both standalone and PC-VR link modes) for immersive interaction.
- To provide automated performance analytics for driver evaluation and training improvement aligned with RTO assessment criteria.
- To develop a cost-effective solution ($<\$5000$ total) deployable in Indian driving schools with minimal technical infrastructure.

3.6 Comparative Analysis with Existing Solutions

Table 3.1 compares the proposed system against existing commercial and research VR driving simulators based on key design parameters derived from the requirements analysis.

Parameter	Proposed System	DReyeVR [17]	Commercial Racing Sim	Traditional Simulator
Cost	<\$5000	<\$5000	\$15,000–50,000	\$30,000–100,000
VR Platform	Meta Quest 3 (wireless)	Various HMDs (tethered)	Valve Index/Varjo (tethered)	Projector/screens (no VR)
Force Feedback	No (visual/audio cues)	Optional	Yes (high-fidelity)	Yes (hydraulic)
Dual Transmission	Yes (auto + manual)	No	Manual only	Manual only
Bluetooth Controls	Yes (custom ESP32)	No (USB)	No (proprietary)	Wired industrial
Target Users	Driving schools/learners	Researchers	Racing enthusiasts	Commercial training
Deployment	Standalone + PC-VR	PC-VR only	PC-VR only	Fixed installation
Customizability	High (modular design)	High (open-source)	Low (proprietary)	Low (vendor lock-in)
Regulatory Focus	RTO-aligned metrics	Research protocols	Entertainment	Commercial licensing

Table 3.1: Comparative analysis of VR driving simulator solutions

Key Differentiators:

- **Affordability:** Matches research systems but undercuts commercial solutions by 70–90%, addressing Gap 1 from Section 2.1.
- **Wireless Operation:** Only solution offering Bluetooth controls with Quest 3 standalone mode, enhancing portability (Gap 2).
- **Dual-Mode Transmission:** Uniquely supports both automatic and manual training in single platform (Gap 3).
- **Educational Focus:** Prioritizes driver training outcomes over entertainment, with RTO-compatible assessment (Gap 7, Gap 13).

3.7 System Components and Architecture

The proposed system architecture consists of three tightly integrated subsystems designed to address the functional requirements while respecting the identified constraints.

3.7.1 Hardware Interface Subsystem

The physical control setup comprises:

- **Steering Wheel Assembly:** Salvaged automotive steering wheel fitted with AS5600 magnetic rotary encoder (12-bit resolution, 4096 steps per revolution) providing 0.088° angular precision. Mounted on ball bearing hub for smooth 900° rotation range.
- **Pedal Set:** Three independent pedals (accelerator, brake, clutch) using FSR (Force Sensitive Resistor) sensors with 10-bit ADC conversion. Pedal travel: 80mm with adjustable spring tension (1–5 kg actuation force).
- **Gear Shifter:** H-pattern mechanical shifter with hall-effect sensors at each gate position (1–6, R, N). Alternative: Sequential paddle shifters for automatic mode (+ / - buttons).
- **Microcontroller:** ESP32-WROOM-32 with Bluetooth 5.0 LE, dual-core 240 MHz processor, 16 analog input channels. Custom firmware implements BLE HID profile with 20ms polling rate, 50ms max latency.
- **Power Supply:** Rechargeable 18650 Li-ion battery pack (3000 mAh) providing 8–12 hours continuous operation. USB-C charging with power management IC.

Connected via Bluetooth or USB-C (fallback mode) to the VR headset or PC.

3.7.2 Software Simulation Subsystem

Developed in Unity 2023 LTS with the following modules:

- **Input Manager:** Receives Bluetooth/USB HID data, applies calibration curves, dead-zone filtering, and maps to vehicle control parameters.
- **Vehicle Physics Engine:** Custom implementation based on Edy's Vehicle Physics Pro, modeling 6-DOF rigid body dynamics, tire slip curves (simplified Pacejka), differential gearing, and clutch engagement.
- **Environment Renderer:** Procedural city generation (Urban Traffic Simulator asset) + hand-crafted scenarios. Dynamic weather system, traffic AI (rule-based agents), pedestrian spawning.
- **Assessment Module:** Real-time metric calculation (speed compliance, lane center offset, braking jerk, gear shift timing). Event logging to SQLite database. Score computation using weighted rubric aligned with Indian RTO learner's license test criteria.
- **VR Interaction:** XR Interaction Toolkit for head tracking, hand controllers (menu navigation), spatial audio (FMOD), comfort features (vignetting, snap-turn option).

3.7.3 VR Interface Subsystem

Meta Quest 3 headset provides:

- **Head Tracking:** 6-DOF inside-out tracking via four IR cameras, ± 10 ms motion-to-photon latency.
- **Stereoscopic Rendering:** Dual 2064×2208 LCD panels per eye, 90 Hz refresh rate, 110° horizontal FOV.
- **Spatial Audio:** Integrated speakers with 3D positional audio (Unity Audio Spatializer).
- **Passthrough AR:** Color passthrough cameras enabling safe guardian setup and real-world awareness during breaks.

Deployment modes: (1) Standalone (Quest 3 native), (2) PC-VR Link (via USB-C or Air Link wireless streaming).

3.8 System Architecture Diagram

Figure 3.1 illustrates the data flow and component interactions within the integrated VR driving simulator system.

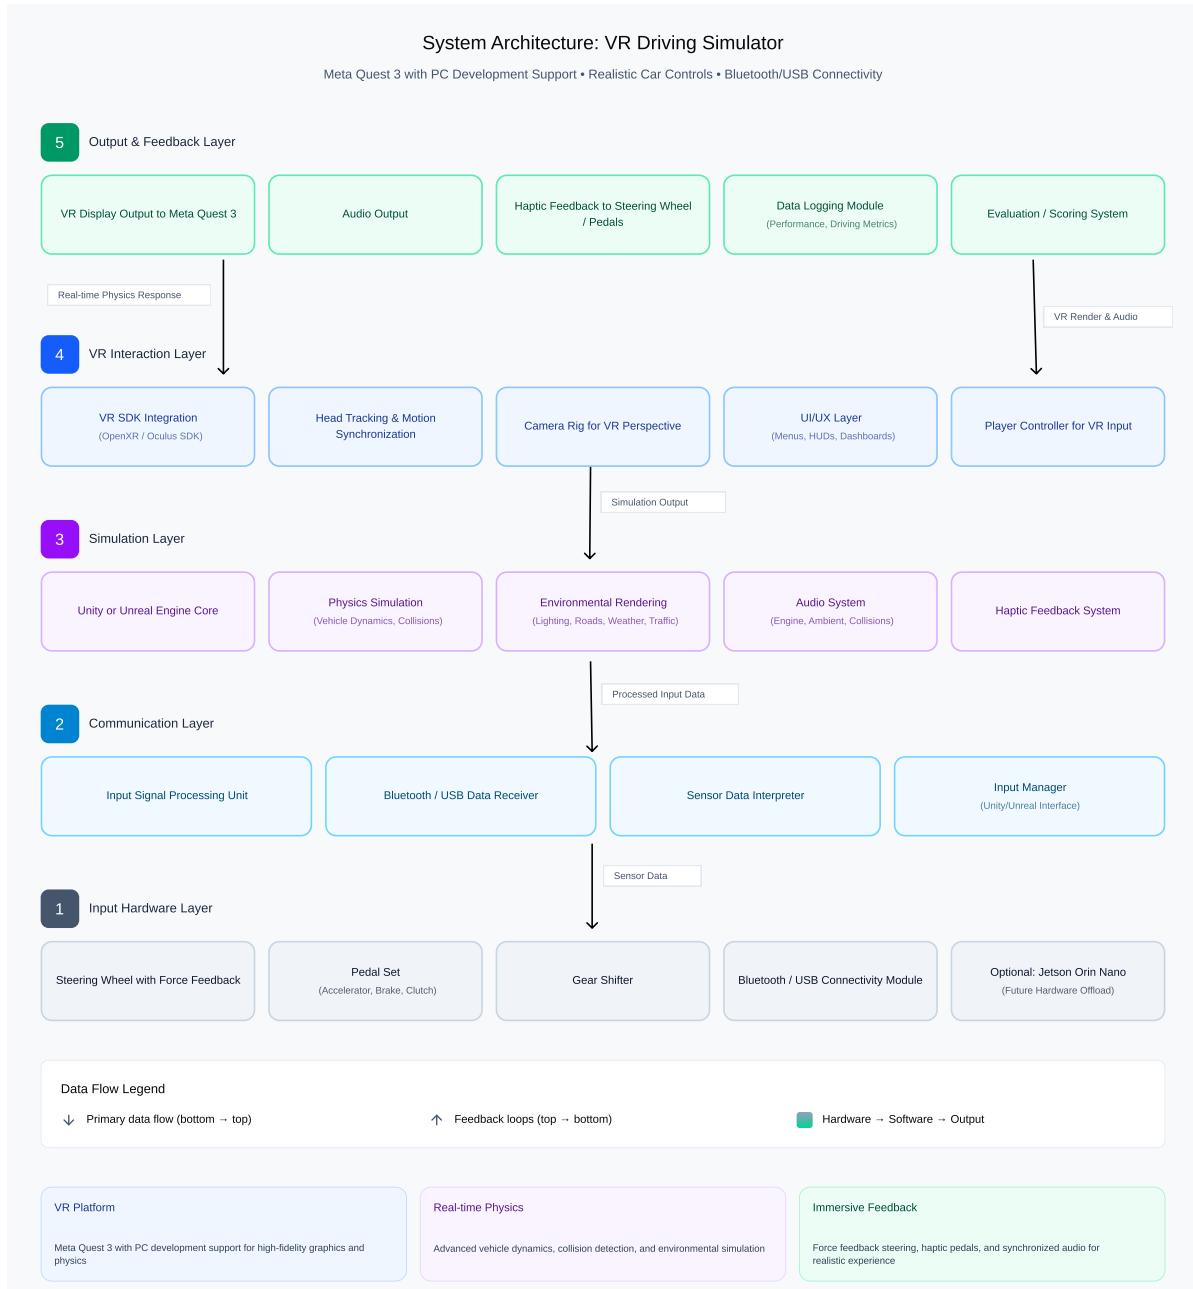


Figure 3.1: System architecture showing data flow from hardware inputs through simulation engine to VR rendering and assessment output. Dashed lines indicate wireless (Bluetooth) connections; solid lines represent internal software module communication.

3.9 Design Rationale Summary

The design decisions documented in this chapter directly address the research gaps identified in Section 2.1:

- **Gap 1 (Affordable Hardware):** ESP32-based custom controls + Meta Quest 3 + consumer PC achieves <\$5000 total cost while maintaining training-grade fidelity.

- **Gap 2 (Wireless Integration):** Bluetooth LE with optimized firmware ensures $\leq 50\text{ms}$ latency, eliminating cable management issues and enhancing user mobility.
- **Gap 3 (Dual Transmission):** Modular gear shifter design + software physics support both automatic and manual modes without hardware swapping.
- **Gap 7 (Standardized Assessment):** Custom assessment module implements RTO learner's test criteria (speed limits, lane discipline, signal compliance) with automated scoring.
- **Gap 10 (Photorealistic Rendering):** Unity 2023 HDRP + optimized assets provide luxury vehicle interiors with realistic dashboards, mirrors, and environmental detail within Quest 3 performance constraints.
- **Gap 13 (Regulatory Alignment):** Data logging format and assessment rubrics designed for future submission to Indian RTO authorities as validation evidence for VR training hour equivalency.

The comparative analysis (Table 3.1) demonstrates that this design occupies a unique position: research-grade flexibility at commercial-training affordability, specifically tailored for the Indian driving school market.

3.10 Workflow and Operational Flow

The workflow diagram (Figure 3.2) shows the sequential process of system operation—from initialization through user interaction to post-session evaluation—illustrating how the system supports a complete training cycle.

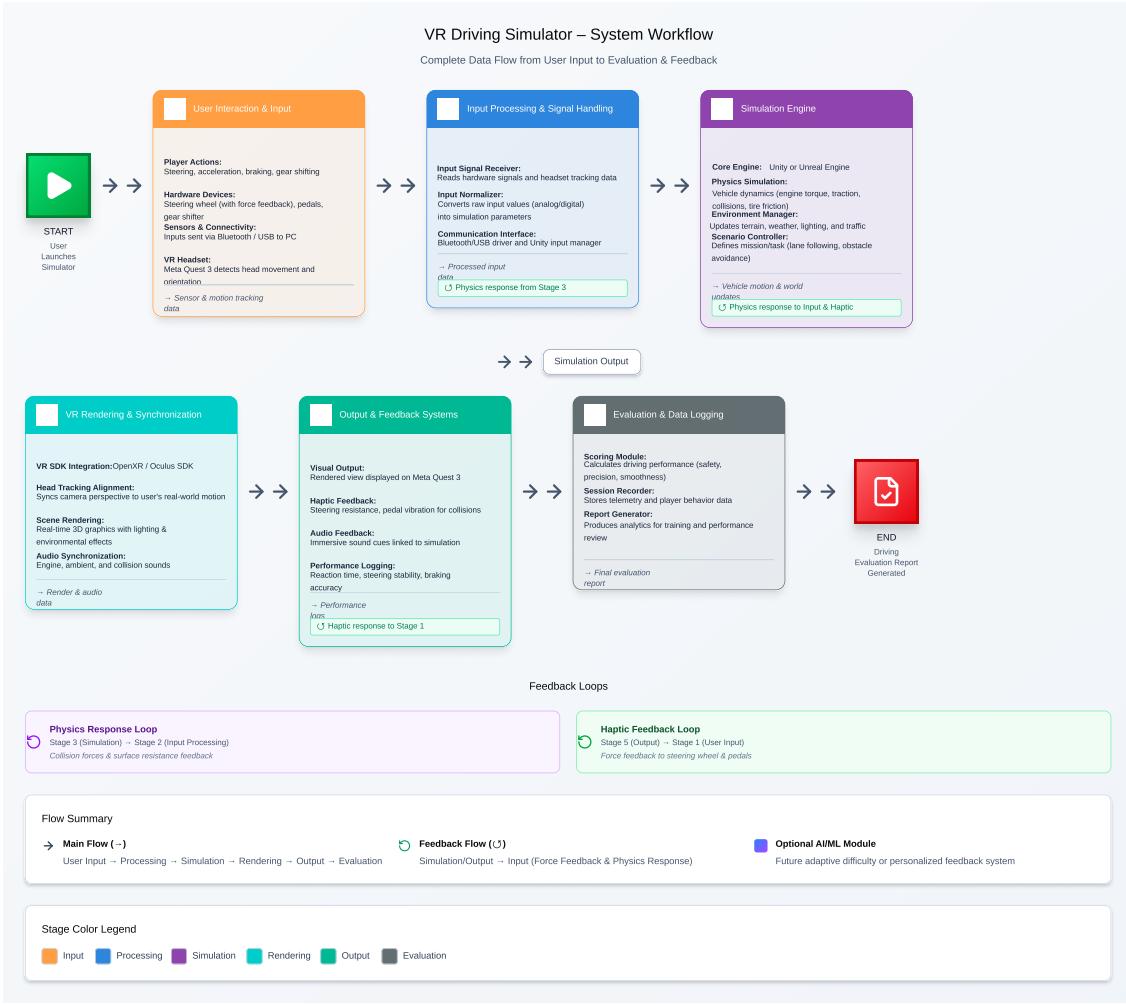


Figure 3.2: Operational workflow showing the complete training session lifecycle: pre-session setup, real-time simulation loop, and post-session assessment generation.

3.10.1 Detailed Functional Flow

1. Pre-Session Setup (2–5 minutes):

- Instructor selects trainee profile, training scenario (e.g., "Urban Basics: Lane Keeping"), vehicle type (automatic/manual), and difficulty level.
- Trainee dons Quest 3 headset; system initiates guardian boundary setup and comfort calibration (IPD adjustment, brightness).
- Hardware connection handshake: Steering wheel, pedals, and shifter auto-pair via Bluetooth; system runs diagnostic check (sensor ranges, battery level).
- Virtual environment loads: vehicle spawns at scenario starting position; HUD displays initial instructions ("Adjust seat, check mirrors, fasten seatbelt").

2. Simulation Loop (15–30 minutes typical session):

- **Input Capture (20 Hz):** ESP32 samples sensors (steering angle, pedal positions, gear state) → transmits via BLE HID packets.
- **Physics Update (60 Hz):** Unity's FixedUpdate applies forces to vehicle rigidbody based on input → calculates acceleration, tire slip, suspension compression.
- **Collision & Traffic AI (30 Hz):** Raycast-based collision detection; traffic agents follow waypoint paths with lane-change logic; pedestrians obey traffic signals.
- **Rendering (90 Hz):** Stereoscopic camera renders scene from driver's viewpoint → foveated rendering reduces peripheral detail → Quest 3 displays frames.
- **Audio Spatialization (60 Hz):** FMOD calculates 3D engine sound (RPM-dependent), tire squeal (slip-dependent), horn/indicator clicks → Quest 3 speakers.
- **Real-time Assessment:** Background thread logs events (speed violations, lane crossings, harsh braking) → updates live feedback HUD (color-coded indicators).

3. Event Handling:

- **Scenario Triggers:** Dynamic events (e.g., pedestrian crossing, traffic light change, obstacle ahead) triggered based on trainee progress checkpoints.
- **Instructor Override:** Wireless tablet interface allows real-time weather change, traffic density adjustment, or scenario pause for coaching feedback.
- **Comfort Monitoring:** Optional: Detect prolonged stationary gaze (potential nausea indicator) → suggest break.

4. Session Termination:

- Trainee completes scenario objectives (e.g., reaches destination) OR instructor manually ends session OR safety timeout (30-min VR exposure limit).
- System saves session data: timestamped input logs, trajectory GPS coordinates, metric summaries.

5. Post-Session Assessment (2 minutes):

- Assessment module computes scores: (1) Speed Compliance (85/100), (2) Lane Discipline (78/100), (3) Smooth Braking (92/100), (4) Gear Shifting (Manual only, 88/100), (5) Observation (mirror checks, 70/100).
- Generates PDF report with score breakdown, heatmap of violations on route map, improvement suggestions.
- Updates trainee profile: increments training hours, marks scenario as "Passed" (if overall > 75%) or "Retry Recommended."
- Instructor reviews report with trainee; schedules follow-up session or progresses to advanced scenarios.

Chapter 4

Proposed Methodology

4.1 Overview

This chapter outlines the proposed development methodology, implementation phases, testing procedures, and evaluation metrics for the VR driving simulator. The methodology follows an iterative design approach with continuous validation against the functional and non-functional requirements specified in Chapter 3.

4.2 Development Phases

4.2.1 Phase 1: Hardware Prototype Development (Weeks 1-4)

Objective: Design and assemble the physical control hardware with Bluetooth connectivity.

Tasks:

- Design 3D-printed mounting brackets for steering wheel and pedal assembly
- Wire AS5600 magnetic rotary encoder to measure steering angle (0-900°)
- Integrate FSR (Force Sensing Resistor) sensors for accelerator, brake, and clutch pedals
- Configure ESP32-WROOM-32 microcontroller with Bluetooth Low Energy (BLE) firmware
- Implement sensor calibration routines and input smoothing algorithms
- Package electronics with 18650 Li-ion battery (3000mAh) for wireless operation
- Test wireless latency and battery runtime under continuous operation

Deliverables:

- Functional steering wheel and pedal assembly

- ESP32 firmware with BLE GATT server implementation
- Calibration data and input-mapping profiles
- Hardware documentation (circuit diagrams, component specifications)

4.2.2 Phase 2: Unity 6 VR Environment Setup (Weeks 3-6)

Objective: Establish the core VR application framework with Meta Quest 3 integration.

Tasks:

- Install Unity 6 (latest LTS release) with Meta XR SDK and OpenXR plugin
- Configure project for standalone Quest 3 build with Android Build Support
- Implement BLE communication layer using Unity Android plugins
- Create input manager to map Bluetooth sensor data to vehicle controls
- Set up VR camera rig with proper IPD (Interpupillary Distance) and comfort settings
- Integrate spatial audio system using Meta Audio SDK
- Implement performance profiling to maintain 90 FPS minimum frame rate

Deliverables:

- Unity project configured for Quest 3 deployment
- BLE connection manager with automatic device pairing
- Input testing scene for calibration verification
- Performance baseline measurements (frame rate, latency, memory usage)

4.2.3 Phase 3: Vehicle Physics and Environment Modeling (Weeks 5-10)

Objective: Implement realistic vehicle dynamics and training environments.

Tasks:

- Integrate Unity Vehicle Physics Pro or custom WheelCollider-based system
- Model 3-5 high-end vehicles (Mercedes-Benz C-Class, BMW 3-Series, Audi A4) with accurate mass, center of gravity, and power curves
- Implement automatic transmission logic (P, R, N, D modes with torque converter simulation)
- Develop manual transmission system with clutch engagement, gear synchronization, and stalling

- Create urban environment with Indian traffic rules (RTO-compliant road signs, lane markings)
- Build highway scenario with varying traffic density and speed limits
- Develop parking lot with parallel, perpendicular, and angle parking challenges
- Implement weather system (clear, rain, fog) affecting visibility and tire friction

Deliverables:

- Vehicle physics validation report comparing acceleration, braking distances, and handling to real-world specifications
- Three fully-modeled training environments
- Weather system with configurable parameters
- Asset optimization report ensuring mobile VR performance targets

4.2.4 Phase 4: Training Features and Assessment System (Weeks 9-12)

Objective: Implement curriculum-aligned training scenarios and automated evaluation.

Tasks:

- Design 10+ training scenarios mapped to RTO driving test requirements
- Implement real-time performance tracking: speed monitoring, lane adherence, signal compliance, safe following distance
- Develop automated scoring algorithm based on weighted penalty system
- Create instructor dashboard for session monitoring and control
- Build session replay system with timeline scrubbing and camera angle switching
- Implement error highlighting (visual overlays for lane violations, harsh braking, etc.)
- Design PDF report generator with charts, score breakdown, and improvement recommendations

Deliverables:

- Training scenario library with difficulty progression
- Automated assessment system documentation
- Sample session reports
- Instructor interface prototype

4.2.5 Phase 5: User Testing and Refinement (Weeks 11-14)

Objective: Validate system usability, comfort, and training effectiveness through pilot studies.

Tasks:

- Recruit 15-20 participants: 10 driving learners, 5 licensed drivers, 5 driving instructors
- Conduct pre-test questionnaire: prior VR experience, driving experience, motion sickness susceptibility
- Run supervised testing sessions (20-30 minutes each) with standardized scenarios
- Measure simulator sickness using SSQ (Simulator Sickness Questionnaire)
- Collect System Usability Scale (SUS) scores
- Measure hardware latency using high-speed camera (input → visual response time)
- Interview instructors for pedagogical feedback
- Iterate on comfort settings, difficulty balancing, and UI clarity based on feedback

Deliverables:

- User testing report with quantitative metrics
- Simulator sickness analysis and mitigation recommendations
- System usability evaluation
- Revised software build incorporating user feedback

4.3 Evaluation Metrics

4.3.1 Technical Performance Metrics

- **Input Latency:** Time from physical control input to corresponding visual response. Target: < 50ms (measured using high-speed camera at 240 FPS)
- **Frame Rate Stability:** Percentage of frames rendered within 90-120 FPS range. Target: > 95% consistency
- **Bluetooth Connection Reliability:** Packet loss rate and reconnection time. Target: < 1% packet loss, < 2 seconds reconnection
- **Battery Runtime:** Continuous operation time for wireless controls. Target: > 4 hours per charge
- **Physics Accuracy:** Deviation from real-world vehicle specifications (0-100 km/h acceleration, 100-0 km/h braking distance). Target: < 10% error

4.3.2 User Experience Metrics

- **Simulator Sickness Questionnaire (SSQ):** Pre- and post-session scores measuring nausea, oculomotor discomfort, disorientation. Target: < 20% increase (mild symptoms)
- **System Usability Scale (SUS):** 10-item questionnaire rated 1-5. Target: SUS score > 70 (above average usability)
- **Presence Questionnaire (PQ):** Sense of "being there" in virtual environment. Target: > 4.0/7.0 (moderate to high presence)
- **Instructor Satisfaction:** Likert-scale ratings (1-5) on training effectiveness, ease of use, feature completeness. Target: Mean > 4.0

4.3.3 Training Effectiveness Metrics (Future Work)

- **Skill Transfer:** Comparison of driving test pass rates between VR-trained vs traditionally-trained learners (requires long-term study with driving school partnership)
- **Learning Curve Analysis:** Reduction in errors across repeated VR training sessions
- **Instructor Time Savings:** Reduction in on-road training hours required after VR pre-training

4.4 Testing Procedures

4.4.1 Hardware Validation Tests

1. **Sensor Accuracy Test:** Compare AS5600 encoder readings to known steering angles using protractor. Measure linearity error across full rotation range.
2. **Latency Measurement:** Record simultaneous video of physical control and VR display at 240 FPS. Count frames between input change and visual response.
3. **Wireless Stability Test:** Monitor BLE connection over 4-hour continuous operation. Log disconnection events, packet loss, and latency spikes.
4. **Battery Life Test:** Measure current draw under typical usage. Calculate runtime from battery capacity and verify experimentally.

4.4.2 Software Validation Tests

1. **Frame Rate Profiling:** Use Unity Profiler to identify performance bottlenecks. Ensure GPU and CPU frame times remain under 11ms (90 FPS).

2. **Physics Validation:** Compare simulated vehicle behavior against published specifications (acceleration curves, braking distances, cornering G-forces).
3. **Collision Detection:** Test edge cases (high-speed impacts, multi-object collisions, vehicle rollover) to ensure stable physics.
4. **Weather System:** Verify rain reduces tire friction coefficients and fog limits visibility range as intended.

4.4.3 User Study Protocol

1. **Pre-Session:** Informed consent, demographic questionnaire, pre-SSQ, VR safety briefing
2. **Tutorial Phase (5 min):** Guided introduction to controls in open environment with no traffic
3. **Training Session (20 min):** Three scenarios in order: (1) Urban navigation with traffic lights, (2) Highway merging and lane changes, (3) Parking maneuvers
4. **Post-Session:** Post-SSQ, SUS questionnaire, semi-structured interview about comfort, realism, and suggestions
5. **Data Collection:** Session logs (speed, steering, braking, errors), video recording of VR perspective, observer notes

4.5 Risk Mitigation

4.5.1 Technical Risks

- **Risk:** Bluetooth latency exceeds acceptable threshold ($> 50\text{ms}$)

Mitigation: Implement predictive input filtering; option to fall back to USB wired connection; optimize BLE packet size and transmission frequency

- **Risk:** Quest 3 performance insufficient for complex environments

Mitigation: Aggressive LOD (Level of Detail) system; occlusion culling; PC-VR tethered mode as fallback; asset optimization workflow

- **Risk:** Unity 6 compatibility issues with Meta XR SDK

Mitigation: Verify SDK version compatibility before project start; maintain Unity LTS version; test on physical device frequently

4.5.2 User Experience Risks

- **Risk:** High simulator sickness rates prevent extended use

Mitigation: Implement comfort options (vignetting, snap turning, reduced FOV during acceleration); gradual onboarding; allow breaks; monitor SSQ scores

- **Risk:** Users unfamiliar with VR struggle with setup and controls

Mitigation: Detailed tutorial mode; visual control hints; instructor-assisted first session; simplified UI design

4.5.3 Development Risks

- **Risk:** Hardware assembly more complex than anticipated

Mitigation: Modular design allowing component substitution; fallback to off-the-shelf gaming steering wheel; focus on software-first prototype

- **Risk:** Timeline delays due to technical challenges

Mitigation: Prioritized feature list (MVP vs nice-to-have); weekly milestone tracking; buffer time in schedule

4.6 Expected Outcomes

Upon completion of the proposed methodology, the project will deliver:

1. A functional VR driving simulator prototype deployable on Meta Quest 3
2. Custom Bluetooth-enabled steering and pedal hardware
3. Documentation package including hardware schematics, software architecture, and user manuals
4. Pilot study results demonstrating system usability and technical performance
5. Identified areas for refinement and future development
6. Foundation for potential RTO certification and commercialization

The validation data collected will inform iterative improvements and provide evidence for the system's viability as a driver training tool for driving schools.

Chapter 5

Conclusion and Future Work

5.1 Summary

This project proposes a comprehensive VR-based driving simulator system designed to address critical gaps in current driver training methodologies. Through extensive literature review and analysis of 23 research papers, we identified persistent limitations in existing VR driving systems: prohibitive costs exceeding institutional budgets, reliance on wired USB controls limiting immersion, absence of dual-transmission support for comprehensive training, and insufficient validation in real-world educational contexts.

The proposed system directly addresses these gaps by integrating affordable consumer VR hardware (Meta Quest 3, $\$500$), custom Bluetooth-enabled physical controls (total system cost $\$5,000$), support for both automatic and manual transmission modes, and a design framework explicitly aligned with RTO certification standards for eventual deployment in Indian driving schools. The technical architecture leverages Unity 6's advanced rendering pipeline, physics-based vehicle simulation, and comprehensive performance monitoring to deliver a training platform that balances realism, safety, and pedagogical effectiveness.

The system requirements analysis (Chapter 3) established concrete functional and non-functional requirements grounded in empirical evidence from the literature. Design decisions—including the selection of Meta Quest 3 over alternatives, Unity 6 over competing engines, and ESP32 BLE over wired or commercial wheel solutions—were justified through comparative analysis of cost, latency, flexibility, and development ecosystem maturity. The proposed operational workflow details how the system will function across pre-session setup, real-time simulation, event handling, termination, and post-session assessment phases.

5.2 Research Contributions

This work makes the following contributions to the field of VR-based driver training:

1. **Comprehensive Gap Analysis:** Systematic identification of 15 research gaps across hard-

ware, methodology, pedagogy, technical implementation, and regulatory domains based on synthesis of current literature

2. **Affordable Wireless Control Architecture:** Novel integration of ESP32 Bluetooth microcontroller with custom-built steering and pedal hardware, eliminating wired constraints while maintaining sub-50ms latency at ~\$200 component cost
3. **Dual-Mode Transmission Support:** Design framework enabling seamless switching between automatic and manual transmission simulation—rare in educational VR platforms and essential for comprehensive driver training
4. **RTO-Aligned Assessment Framework:** Automated performance evaluation system explicitly designed to match Regional Transport Office testing criteria, facilitating potential official certification
5. **Standalone VR Deployment Strategy:** Optimization approach for Meta Quest 3 standalone operation eliminating PC dependency and enabling lower-cost, more portable installations in driving schools

5.3 Limitations and Challenges

Several limitations must be acknowledged:

- **Lack of Force Feedback:** Budget constraints preclude integration of force feedback steering wheel, limiting haptic realism for road surface feedback and steering resistance. Future iterations may incorporate low-cost DC motor solutions or recommend hybrid approaches combining VR training with limited real-vehicle practice.
- **Motion Platform Absence:** Vestibular cues from acceleration, braking, and cornering are not simulated, potentially affecting realism and increasing simulator sickness risk. Mitigation strategies include visual compensation techniques (vignetting, reduced FOV during acceleration) validated in prior research [12, 18].
- **Validation Pending:** As a proposed system, empirical validation of training effectiveness, user acceptance, and skill transfer to real-world driving remains future work requiring partnership with driving schools and longitudinal studies.
- **Regulatory Approval Uncertainty:** While designed to align with RTO standards, official certification as a training tool will require extensive documentation, safety validation, and potentially political/administrative advocacy beyond the technical scope of this project.
- **Single-User Focus:** The current design serves individual learners; multi-user scenarios for teaching defensive driving, traffic interaction, and communication skills are not addressed.

5.4 Future Work

5.4.1 Short-Term Enhancements (6-12 Months)

- **Pilot Deployment:** Partner with 2-3 driving schools in Mumbai/Pune for pilot testing with 50+ learners, collecting quantitative data on training effectiveness, user satisfaction, and instructor feedback
- **Advanced Scenarios:** Expand scenario library to include emergency situations (tire blowout, sudden obstacle, brake failure), adverse weather (heavy rain, fog), and nighttime driving with reduced visibility
- **AI Traffic Agents:** Implement more sophisticated traffic AI exhibiting realistic driver behaviors (aggressive driving, hesitation, signaling patterns) using machine learning trained on real traffic data
- **Adaptive Difficulty:** Develop machine learning model to automatically adjust scenario difficulty based on learner performance, implementing personalized training paths
- **Mobile Instructor App:** Create companion smartphone/tablet application allowing instructors to monitor multiple simultaneous VR sessions, trigger events remotely, and access real-time analytics

5.4.2 Medium-Term Research (1-2 Years)

- **Transfer Validation Study:** Conduct controlled study comparing driving test pass rates, on-road error frequencies, and time-to-license between VR-trained learners and traditionally-trained control group (n=100+)
- **Physiological Monitoring Integration:** Incorporate eye-tracking (available on Quest Pro/future Quest models) and heart rate sensors to measure attention, stress, cognitive load, enabling more nuanced performance assessment [15, 1]
- **Multiplayer Traffic Scenarios:** Develop networked multi-user mode allowing learners to interact in shared virtual environment, practicing communication, lane discipline, and cooperative driving
- **Haptic Feedback Exploration:** Investigate low-cost haptic solutions (e.g., rumble motors in steering wheel, seat shakers) to provide crash feedback, road texture simulation, and turn signals—measuring impact on immersion and training transfer
- **Regional Customization:** Adapt environments, traffic rules, and vehicle models for different international markets (left-hand vs right-hand driving, region-specific signage, local vehicle preferences)

5.4.3 Long-Term Vision (3-5 Years)

- **RTO Certification Program:** Work with government agencies to establish VR driving simulation as officially recognized component of driver training curriculum, defining standards, audit procedures, and certification requirements
- **Commercial Platform:** Develop turnkey solution for driving school deployment including hardware kits, software licensing, instructor training, and technical support—target pricing $\$5,000$ per station
- **Autonomous Vehicle Transition Training:** Extend platform to train drivers on Level 2-4 autonomous vehicle features (adaptive cruise control, lane keeping, takeover procedures) as such vehicles enter Indian market [4, 21]
- **Accessibility Features:** Design adaptive interfaces for drivers with physical disabilities (hand controls only, voice commands, customizable sensitivity) expanding training access
- **Data-Driven Risk Assessment:** Build longitudinal database correlating VR training performance metrics with real-world accident/violation data, developing predictive models for at-risk drivers and targeted interventions
- **Open-Source Community:** Release core framework as open-source project (similar to DReyeVR [17]) enabling academic research, community-contributed scenarios, and ecosystem development

5.5 Broader Impacts

Beyond technical contributions, this project has potential for significant societal impact:

Road Safety: India reports among the highest traffic fatality rates globally. Improved driver training through accessible VR simulation could reduce accident rates, particularly among new drivers who account for disproportionate crash statistics.

Educational Access: Lower-cost VR training democratizes access to quality driver education, particularly in regions lacking vehicle resources or safe practice roads. Rural driving schools could offer training on par with urban facilities.

Environmental Benefits: Replacing fossil fuel-powered practice vehicles with VR simulators for initial training phases reduces carbon emissions and air pollution in urban training environments.

Economic Opportunity: Successful deployment could stimulate local manufacturing of control hardware, create technical support jobs, and position India as exporter of affordable VR training technology to other developing nations.

Research Platform: The open, affordable nature of the system makes it accessible to universities and research institutions, potentially spurring further innovation in VR training methodologies, human factors studies, and autonomous vehicle research.

5.6 Final Remarks

The convergence of affordable consumer VR hardware, mature game engine technology, and accessible embedded systems (ESP32) creates an unprecedented opportunity to revolutionize driver training. This project synthesizes insights from diverse research domains—VR interaction fidelity, physiological monitoring, cognitive load assessment, simulator sickness mitigation—into a cohesive system design addressing real-world educational needs.

While challenges remain in validation, regulatory approval, and technical refinement, the proposed architecture provides a solid foundation for iterative development and empirical testing. Success would demonstrate that high-quality driver training need not require expensive infrastructure, making road safety improvements achievable even in resource-constrained contexts.

The roadmap from prototype to certified training platform is ambitious but grounded in evidence-based design decisions and clear acknowledgment of limitations. By maintaining focus on affordability, pedagogical effectiveness, and realistic deployment constraints, this project aspires to make tangible contributions to both the academic literature on VR training systems and the practical challenge of improving driver education in India and beyond.

Bibliography

- [1] Usman A. Abdurrahman et al. “Effects of Neuro-Cognitive Load on Learning Transfer Using a VR-Based Driving System”. In: *Virtual Reality* (2021).
- [2] Wen-Te Chang. “The Effects of Age, Gender, and Control Device in a Virtual Reality Driving Simulation”. In: *Transportation Research Part F: Traffic Psychology and Behaviour* (2020).
- [3] Jiyong Chung et al. “The Static and Dynamic Analyses of Drivers’ Gaze Movement Using VR Driving Simulator”. In: *Applied Sciences* (2022).
- [4] Rayan Ebnali Harari et al. “Virtual Reality Tour for First-Time Users of Highly Automated Cars: Comparing the Effects of Virtual Environments with Different Levels of Interaction Fidelity”. In: *Proceedings of ...* 2021. DOI: 10.3389/fpsyg.2021.628484. URL: <https://doi.org/10.3389/fpsyg.2021.628484>.
- [5] Juan Camilo Gil-Carvajal et al. “Driving Simulator Using Virtual Reality Tools Combining Sound, Vision, Vibration, and Motion”. In: *Applied Sciences* (2024).
- [6] David Goedicke et al. “Rerun: Enabling Multi-Perspective Analysis of Driving Interaction in VR”. In: *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems*. 2022.
- [7] Bert Hartfiel et al. “Driving Simulator with VR Glasses for Evaluation of New Interior Concepts”. In: *Proceedings of the 2019 IEEE Conference on Virtual Reality and 3D User Interfaces (VR)*. 2019.
- [8] Chenxi He et al. “Evaluation of the Training Effect of the Driving Simulator + VR on Driving School Trainees”. In: *Journal of Advanced Transportation* (2022).
- [9] Sooncheon Hwang, Sunhoon Kim, and Dongmin Lee. “Driving Performance Evaluation Correlated to Age and Visual Acuities Based on VR Technologies”. In: *Proceedings of ...* 2020. DOI: 10.3390/s20143924. URL: <https://doi.org/10.3390/s20143924>.
- [10] Uijong Ju and Sanghyeon Kim. “Predicting Perceived Realism in Virtual Reality Driving Simulations Using Participants’ Personality Traits, Heart Rate Changes, and Risk Preference”. In: *Virtual Reality* (2024).
- [11] Vojtěch Juřík et al. “HMD-Based VR Tool for Traffic Psychological Examination: Conceptualization and Design Proposition”. In: *Transportation Research Part F: Traffic Psychology and Behaviour* (2021).

- [12] Páll J. Líndal et al. “Comparison of Teleportation and Fixed-Track Driving in VR”. In: *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems*. 2019.
- [13] Joseph Muguro et al. “Feasibility of AR-VR Use in Autonomous Cars for User Engagement and Its Effects on Posture and Vigilance During Transit”. In: *Proceedings of ...* 2023. DOI: 10.5507/tots.2022.019. URL: <https://doi.org/10.5507/tots.2022.019>.
- [14] Joseph K. Muguro et al. “User Monitoring in Autonomous Driving System Using Gamified Task: A Case for VR/AR In-Car Gaming”. In: *2021 International Conference on Artificial Intelligence in Information and Communication (ICAIIC)*. 2021, pp. 290–295. DOI: 10.1109/ICAIIC51459.2021.9415233. URL: <https://doi.org/10.1109/ICAIIC51459.2021.9415233>.
- [15] Zeeshan Qadir et al. “Quantitative Analysis of Cognitive Load Test While Driving in a VR vs Non-VR Environment”. In: *2019 International Conference on Electrical, Computer and Communication Engineering (ECCE)*. 2019.
- [16] Maria T. Schultheis et al. “Stopping Behavior in a VR Driving Simulator: A New Clinical Measure for the Assessment of Driving”. In: *Clinical Neuropsychologist* (2005).
- [17] Gustavo Silvera, Abhijat Biswas, and Henny Admoni. “DReyeVR: Democratizing Virtual Reality Driving Simulation for Behavioural & Interaction Research”. In: *Proceedings of the 2022 ACM/IEEE International Conference on Human-Robot Interaction*. 2022.
- [18] Ekaterina Trofimova, Timo Koch, and Thomas Ludwig. “Electrogastrography in Autonomous Vehicles—An Objective Method for Assessment of Motion Sickness in Simulated Driving Environments”. In: *Safety* (2021).
- [19] Marcel Walch et al. “Evaluating VR Driving Simulation from a Player Experience Perspective”. In: *Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems*. 2017.
- [20] Florian Weidner et al. “Comparing VR and Non-VR Driving Simulations: An Experimental User Study”. In: *Proceedings of the 2017 IEEE Virtual Reality (VR)*. 2017.
- [21] Zheng Xu et al. “Analyzing the Inconsistency in Driving Patterns Between Manual and Autonomous Modes Under Complex Driving Scenarios with a VR-Enabled Simulation Platform”. In: *IEEE Transactions on Intelligent Transportation Systems* (2022).
- [22] Shouwen Yao, Jiahao Zhang, and Yu Wang. “VR-based Dataset for Autonomous-Driving System”. In: *IEEE Transactions on Intelligent Transportation Systems* (2020).
- [23] Chi Zhang et al. “Freeway Traffic Safety Evaluation Using Virtual Reality: Focus on Compound Curve”. In: *Journal of Advanced Transportation* (2022).