
MD30A

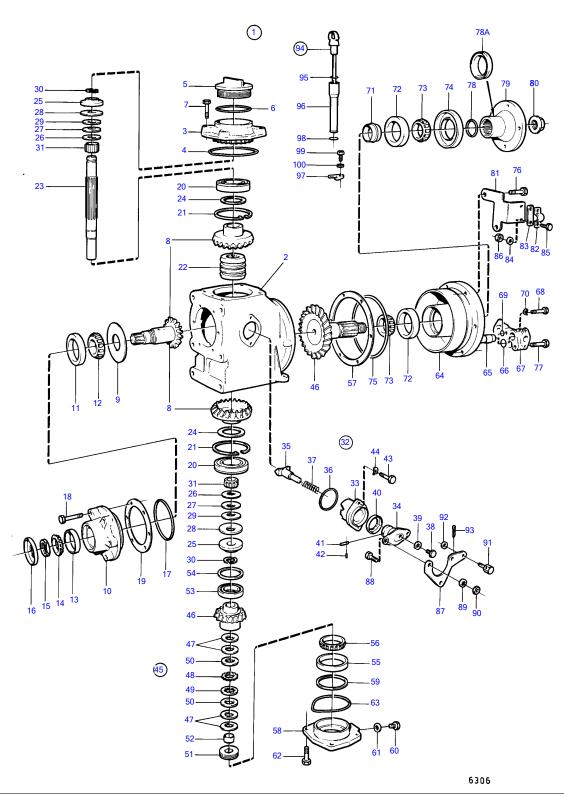

Upd:2010-07-01

MD30A

REF	PART NO.	QTY	DESCRIPTION	SEE SEC.	NOTES
1	852731	1	Reversing gear	SEE SEC.	RATIO 3,02:1
2	852726	1	Housing		114110 0,02.1
3	852524	1	• Cover		(851614)
4	949962	1	• O-ring		(66.6.1)
5	851754	1	Filler cap		
6	925254	1	O-ring		
7	946671	4	Flange screw		(948336)
8	851616	1	Gear set		
9	851621	1	Turntable		
10	851619	1	Bearing box		
11	181302	1	• Cup		
12	181301	1	Inner ring		
13	183750	1	• Cup		
14	183752	1	Cone Lock nut		
15 16	852485 851755	1	Sealing ring		
17	925093	1	O-ring		
18	940101	6	Hexagon screw		
19	851622				TH = 0.10mm
13	851623	X			TH=0,15mm
	851624	X	Adjusting washer		TH = 0.35mm
20	851756	2	Bearing		0.0011111
21	852190	2	• Lock ring		
22	851626	1	Sliding sleeve		
23	852527	1	• Shaft		
24	84219	Х	• Shim		TH = 0.10mm
	949776	Х	• Shim		TH=0,15mm
	84218	Х	• Shim		TH = 0.35mm
25	852079	2	Lock washer		
26	852311	2	Washer		
27	852317	2	Washer		
28	852213	2	Disc spring		
29	852080	6	• Disc spring		
30	851629	4	Lock ring half		
31 32	851757 851661	1	Needle bearing Shift mechanism		
33	851662	1	Bearing housing		
34	897816	1	Eccentric piston		
J-7	037010	'	Bulletin P-44-1-7	P-44-1-7-EN	Shift mechanism, eccentric piston
35	851664	1	• • Dog	- - - - - - - - - - - - - - 	Office mechanism, eccentric pistori
36	925065	1	· · O-ring		
37	814184	1			
38	897711		· · Screw		
39	897871	Х	· · Shim		TH = 0.20mm
40	958838	1	Sealing ring		
41	942871	1	· · Clevis pin		
42	951924	1	Spring pin		
43	955296	2	Hexagon screw		
44	941907	2	Spring washer		
45	852438	1	• Gear set		
46		2	· · GEAR		
47		4	· · CUP SPRING		
48			· · OUTER DISC	-	
49 50			INNER DISC THRUST WASHER	-	
51		1	· · ADJUSTING SCREW	-	
52		1	· · BUSHING	1	
53	183518	1	Roller bearing	1	
54	851705		Adjusting washer		TH = 0.10mm
<u> </u>	851706		Adjusting washer		TH=0,15mm
	851707		Adjusting washer		TH = 0.35mm
55	181662	1	• Cup		REPL BY 183842
56	181305	1	• Cone		REPL BY 183842

7744050-44-18192B 6306 Upd:2010-07-01

MD30A

DE-	DADTAG	OT.	DECORIDATION	055 050	NOTEO
REF	PART NO. 183842	QTY	DESCRIPTION - Roller bearing	SEE SEC.	NOTES
57	851702		Adjusting washer		TH = 0.10mm
- 37	851702		Adjusting washer		TH=0,15mm
	851704	X	Adjusting washer Adjusting washer		TH = 0.35mm
58	851640	1			111 - 0.0011111
59	87655	X			TH = 0.10mm
	191840		• Shim		TH=0,15mm
	87654		• Shim		TH = 0.35mm
	941835		• Shim		TH = 0.5mm
60	960629	1	• Plug		
61	947084	1	Gasket		
62	946671	4			(948336)
63	925256	1	O-ring		
64	851928	1	Bearing housing		
65	852159	1	Oil cooler		
66	925057	2	O-ring		
67	852733	1	Pipe connection		(852157), OBSOLETE PART
68	955278	1	Hexagon screw		
69	949750	1	O-ring		
70	941906	1	Spring washer		
71	851974	1	Pretensioning sleeve		
72	181302		• Cup		
73	181301	2	Inner ring		
74	852528	1	Sealing ring		
75	925262	1	• O-ring		
76	946470	2	• Flange screw		L = 35 MM
L	947760		Flange screw		L = 40 MM
77	965180	2	Flange screw		L = 60 MM (965217)
78	925062		• O-ring		
78A	944138	1	Sealing ring		
79	852076	1	Companion flange		
80	947855	1	Flange lock nut Bracket		
81 82	851441 21471054	1	Bracket Bracket		
83	819068	1	• Washer		
84	940090	2			
85	955246		Hexagon screw		
86	946577	2			
87	852363	1	Intermediate lever		
88	955270		Hexagon screw		
89	955948		Toothed washer		
90	955781	2	Hexagon nut		
91	833462		• Cube		
92	955892	1			
93	17276	1	Split pin		
94	852314	1	Oil dipstick		
95	925054	1	• • O-ring		
96	852228	1	• Tube		OBSOLETE PART
97	852229	1	Cardboard tube		
98	925055		O-ring		
99	956063	1	Cross recessed screw		
100	955891	1	Washer		
	875704	1	Gasket kit		SEE GROUP 10A