
MD30A

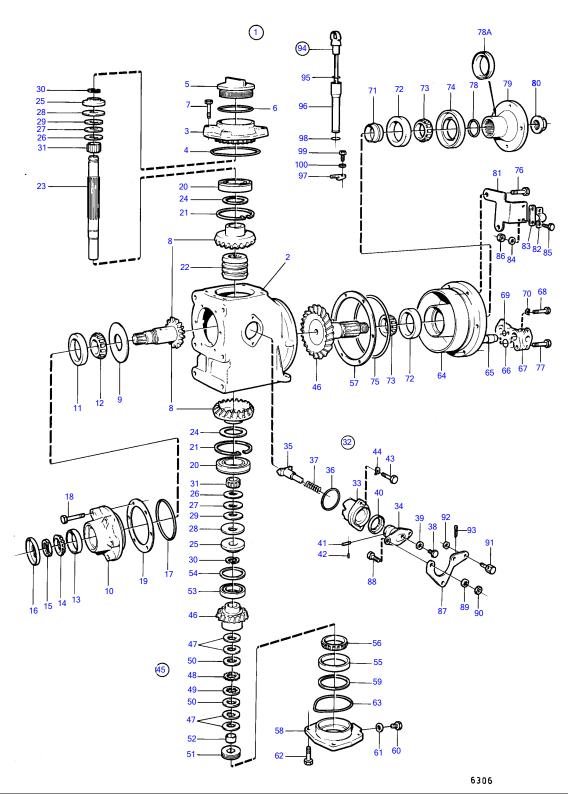

## MD30A

REF	PART NO.	QTY	DESCRIPTION	SEE SEC.	NOTES
1	852730	1	Reversing gear	OLL OLC.	RATIO 2,37:1
2	852726	1	Housing		10.0110 2,07.1
3	852524	1	• Cover		(851614)
4	949962	1	O-ring		
5	851754	1	Filler cap		
6	925254	1	O-ring		
7	946671	4	Flange screw		(948336)
8	851616	1	Gear set		
9	851621	1	Turntable		
10	851619	1	Bearing box		
11	181302	1	• Cup		
12	181301	1	Inner ring		
13	183750	1	• Cup		
14	183752	1	• Cone		
15	852485	1	• Lock nut		
16	851755	1	Sealing ring		
17	925093 940101	1	• O-ring		
18 19	851622	0	Hexagon screw     Adjusting weekers		TU = 0.10mm
19	851623	· ·	Adjusting washer     Adjusting washer		TH = 0.10mm TH=0,15mm
	851624		Adjusting washer		TH=0,15fffff TH = 0.35mm
20	851756	2	Bearing		111 - 0.5511111
21	852190		Lock ring		
22	851626	1	Sliding sleeve		
23	852527	1			
24	84219		• Shim		TH = 0.10mm
	949776		• Shim		TH=0,15mm
	84218		• Shim		TH = 0.35mm
25	852079	2			
26	852311	2			
27	852317		• Washer		
28	852213		Disc spring		
29	852080		Disc spring		
30	851629		Lock ring half		
31	851757	2			
32	851661	1			
33	851662	1	• • Bearing housing		
34	897816	1	Eccentric piston		
			Bulletin P-44-1-7	P-44-1-7-EN	Shift mechanism, eccentric piston
35	851664	1	· · Dog		
36	925065	1	· · O-ring		
37	814184	1	1 0		
38	897711		· · Screw		TII - 0 20 man
39	897871		· · Shim		TH = 0.20mm
40	958838	1	• • Sealing ring		
41	942871		· · Clevis pin		
42	951924 955296	1	Spring pin     Hexagon screw		
43	955296		Spring washer		
45	852319		Gear set		
45	002319	2			
47			· · CUP SPRING		
48		12	· · OUTER DISC		
49			· · INNER DISC		
50			· · THRUST WASHER		
51		1	· · ADJUSTING SCREW		
52		1	• • BUSHING		
53	183518		Roller bearing		
54	851705		Adjusting washer		TH = 0.10mm
	851706		Adjusting washer		TH=0,15mm
	851707		Adjusting washer		TH = 0.35mm
55	181662	1	• Cup		REPL BY 183842
56	181305	1	• Cone		REPL BY 183842

7744050-44-18192 6306 Upd:2010-07-01

## MD30A

REF	PART NO.	QTY	DESCRIPTION	SEE SEC.	NOTES
	183842		Roller bearing		
57	851702		Adjusting washer		TH = 0.10mm
	851703	Х	Adjusting washer		TH=0,15mm
	851704	Х	Adjusting washer		TH = 0.35mm
58	851640	1	Bearing cover		
59	87655	Х			TH = 0.10mm
	191840		• Shim		TH=0,15mm
	87654	Х	• Shim		TH = 0.35mm
	941835		• Shim		TH = 0.5mm
60	960629	1			
61	947084	1	Gasket		
62	946671	4	Flange screw		(948336)
63	925256	1	• O-ring		(5.5555)
64	851928	1	Bearing housing		
65	852159	1	• Oil cooler		
66	925057	-	• O-ring		
67	852733	1			(852157), OBSOLETE PART
68	955278	1	Hexagon screw		(862187); 82882212171111
69	949750	1	O-ring		
70	941906	1			
71	851974	1	Pretensioning sleeve		
72	181302		Cup		
73	181301		Inner ring		
74	852528	1			
75	925262	-	- Sealing ring		
		1	• O-ring		L OF MANA
76	946470		• Flange screw		L = 35 MM
	947760	2	• Flange screw		L = 40 MM
77	965180		• Flange screw		L = 60 MM (965217)
78	925062	1			
78A	944138	1	Sealing ring		
79	852076	1	Companion flange		
80	947855	1	Flange lock nut		
81	851441	1	Bracket		
82	21471054	1	Bracket		
83	819068	1	Washer		
84	940090		Washer		
85	955246		Hexagon screw		
86	946577		Lock nut		
87	852363	1			
88	955270		Hexagon screw		
89	955948	2	Toothed washer		
90	955781	2	Hexagon nut		
91	833462	1	• Cube		
92	955892	1	Washer		
93	17276	1			
94	852314	1	Oil dipstick		
95	925054	1	• • O-ring		
96	852228	1	• Tube		OBSOLETE PART
97	852229	1	Cardboard tube		
98	925055	1	• O-ring		
99	956063	1	Cross recessed screw		
100	955891	1	• Washer		
		1			SEE GROUP 10A
100	955891 875704	1	Washer Gasket kit		SEE GROUP 10A