


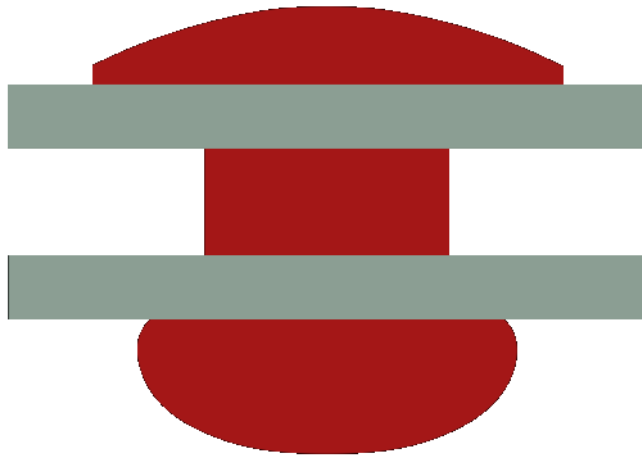

Example 1 - rivt Doc

Example 1 - rivt Doc

Attn: User Example

proj. 0001



Table of Contents

0.1 Summary	1
---------------	---



0.1 | Summary

This rivt file example calculates the maximum stress and deflection in a simply supported, uniformly loaded beam. It also serves as an annotated example of a rivt doc with multiple sections that is not part of a report.

The example illustrates the use of some of the most common API functions, commands and tags. Further details are provided in the < [rivt user manual](#) > .

The file may be formatted as a text, PDF or HTML doc by changing the type parameter in the PUBLISH command at the end of each rivt file (Doc-API rv.D). Published files are found in the _published* folder.

0.1 - 2 | Load Combinations

Table 1: ASCE 7-05 Load Effects (stored: t001-1.csv)

Equation No.	Load Combination
16-1	1.4(D+F)
16-2	1.2(D+F+T) + 1.6(L+H) + 0.5(Lr or S or R)
16-3	1.2(D+F+T) + 1.6(Lr or S or R) + (f1L or 0.8W)

0.1 - 3 | Loads and Geometry

Successive value definitions are formatted as a table. Variable values are defined with the define operator. The line tag [T] labels and numbers the table.

Table 2: Define Unit Loads

variable	value	[value]	description
D_1	3.80 psf	0.18 kPA	joists DL
D_2	2.10 psf	0.10 kPA	plywood DL
D_3	10.00 psf	0.48 kPA	partitions DL
D_4	3.00 klf	43.78 kN_m	fixed machinery DL
L_1	40.00 psf	1.92 kPA	ASCE7-05 LL
b_1	10.00 inch	254.00 mm	beam width
h_1	18.00 inch	457.20 mm	beam depth
E_1	29000.00 ksi	199947.96 MPA	modulus of elasticity
Fb_1	20000.00 lb_in2	137.90 MPA	allowable stress

The VALTABLE command reads variable values from a file in the rvsr folder. The description is the table title, followed by the max column width.



Table 3: Beam Geometry (rvsrc/beam1.csv)

variable	value	[value]	description
spc_1	2.00 ft	0.61 m	beam spacing
spn_1	16.00 ft	4.88 m	beam span

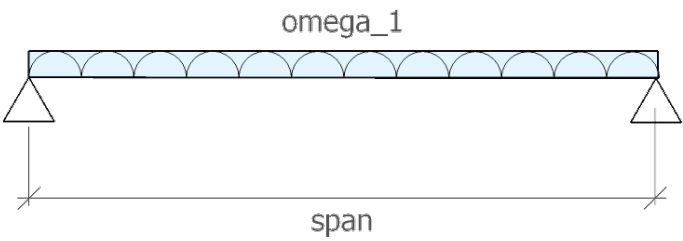


Fig. 1 - Beam Diagram

Uniform Distributed Loads

Eq. 1: Dead load [ASCE7-05 2.3.2]

$$dl_1 = 1.2 \cdot (D_4 + spc_1 \cdot (D_1 + D_2 + D_3))$$
$$dl_1 = 3.64 \text{ klf} \quad [dl_1] = 53.09 \text{ kN}_m \quad | \text{ Dead load [ASCE7-05 2.3.2]}$$

spc ₁	D ₃	D ₂	D ₁	D ₄
2.00 ft	10.00 psf	2.10 psf	3.80 psf	3.00 klf
beam spacing	partitions DL	plywood DL	joists DL	fixed machinery DL

Eq. 2: Live load [ASCE7-05 2.3.2]

$$ll_1 = 1.6 \cdot L_1 \cdot spc_1$$
$$ll_1 = 0.13 \text{ klf} \quad [ll_1] = 1.87 \text{ kN}_m \quad | \text{ Live load [ASCE7-05 2.3.2]}$$

L ₁	spc ₁
40.00 psf	2.00 ft
ASCE7-05 LL	beam spacing



Eq. 3: Total load [ASCE7-05 2.3.2]

$$w_1 = d l_1 + l l_1$$

$$w_1 = 3.77 \text{ klf} \quad [w_1] = 54.96 \text{ kN}_m \quad | \text{ Total load [ASCE7-05 2.3.2]}$$

$d l_1$	$l l_1$
3.64 klf	128.00 ft·psf
Dead load [ASCE7-05 2.3.2]	Live load [ASCE7-05 2.3.2]

0.1 - 4 | Beam Response

The following lines import the beam geometry from an external file, calculate section properties from imported functions and calculate the maximum moment, bending stress and mid-span deflection.

Table 4: Beam functions (rvsrc/sectprop.py)

Function	Docstring
rectsect(b, d)	section modulus of rectangle
rectinertia(b, d)	moment of inertia of rectangle
midspan_delta(ln, w, e, i)	mid-span deflection of simply supported beam with UDL

Eq. 4: rectangle - S (sectprop.py)

$$\text{section}_1 = \text{rectsect}(b_1, h_1)$$

$$\text{section}_1 = 540.00 \text{ in}^3 \quad [\text{section}_1] = 8849.01 \text{ cm}^3 \quad | \text{ rectangle - S (sectprop.py)}$$

b_1	h_1
10.00 inch	18.00 inch
beam width	beam depth

Eq. 5: rectangle - I (sectprop.py)

$$\text{inertia}_1 = \text{rectinertia}(b_1, h_1)$$

$$\text{inertia}_1 = 4860.0 \text{ in}^4 \quad [\text{inertia}_1] = 202288.5 \text{ cm}^4 \quad | \text{ rectangle - I (sectprop.py)}$$



<u>b₁</u>	<u>h₁</u>
10.0 inch	18.0 inch
beam width	beam depth

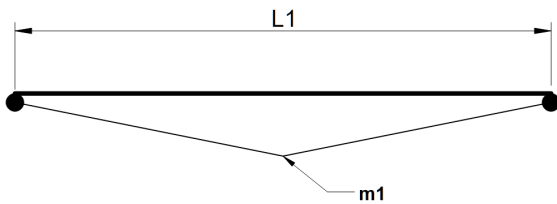


Fig. 2 - Moment diagram

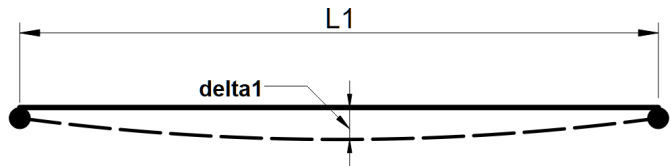


Fig. 3 - Deflection diagram

Maximum bending stress formula

Eq.6:

$$\sigma_1 = \frac{M_1}{S_1}$$

Eq. 7: Mid-span UDL moment

$$m_1 = \frac{\omega_1 \cdot \text{spn}_1^2}{8}$$

$m_1 = 120.52 \text{ ftkip}$ $[m_1] = 163.40 \text{ mkN}$ | Mid-span UDL moment

<u>spn₁</u>	<u>ω₁</u>
16.00 ft	3.77 klf
beam span	Total load [ASCE7-05 2.3.2]



Eq. 8: Bending stress

$$fb_1 = \frac{m_1}{section_1}$$

$fb_1 = 2678.2 \text{ lb_in2}$ $[fb_1] = 18.5 \text{ MPA}$ | Bending stress

m_1	$section_1$
<u>120.5 ft2·klf</u>	<u>540.0 inch3</u>
Mid-span UDL moment	rectangle - S (sectprop.py)

Eq.9: Stress ratio

$fb_1 < Fb_1$

[1] fb_1	[2] Fb_1	ratio [1]/[2]	check	reference
<u>2.68 ksi</u>	<u>20.00 ksi</u>	<u>0.13</u>	<u>OK</u>	<u>Stress ratio</u>

Eq. 10: mid-span deflection (sectprop.py)

$$\delta_1 = \text{midspan_}\delta(\text{spn}_1, \omega_1, E_1, \text{inertia}_1)$$

$\delta_1 = 0.04 \text{ inch}$ $[\delta_1] = 1.00 \text{ mm}$ | mid-span deflection (sectprop.py)

spn_1	$inertia_1$	E_1	ω_1
<u>16.00 ft</u>	<u>4860.00 inch4</u>	<u>29000.00 ksi</u>	<u>3.77 klf</u>
beam span	rectangle - I (sectprop.py)	modulus of elasticity	Total load [ASCE7-05 2.3.2]

