Table of Contents

2.1 | Applied deck forces - RISA model

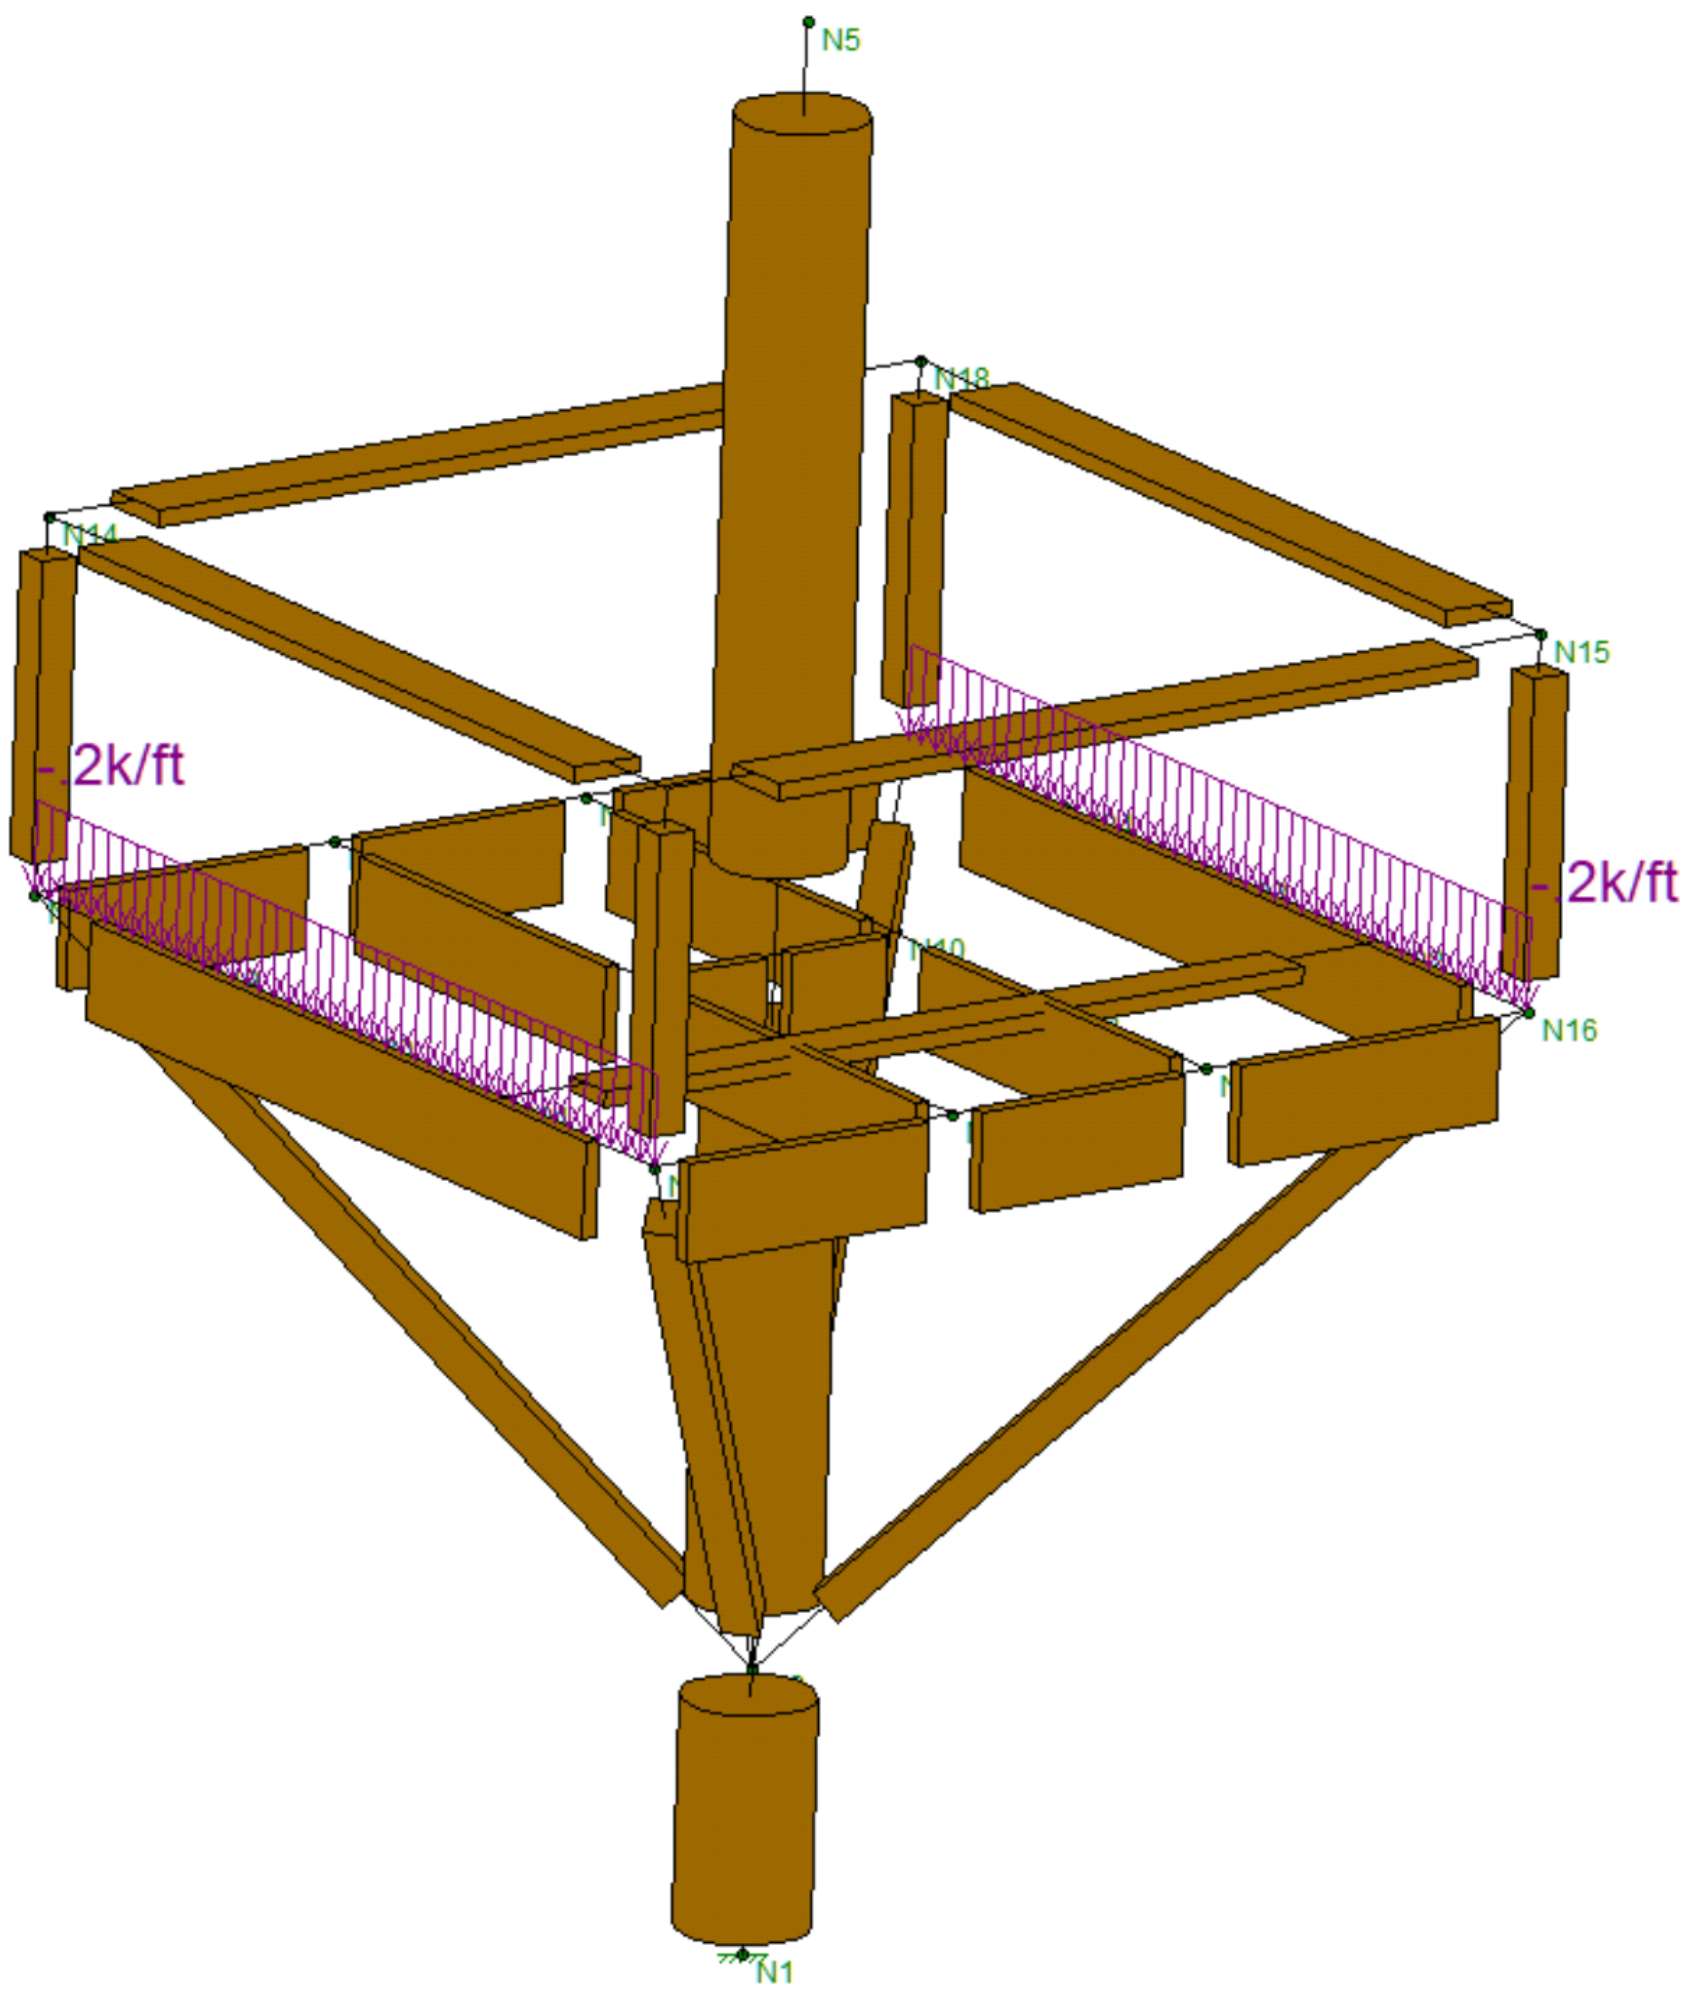

Fig. 1 - Risa Model

2.1 - 2 | Resultant axial forces - RISA model

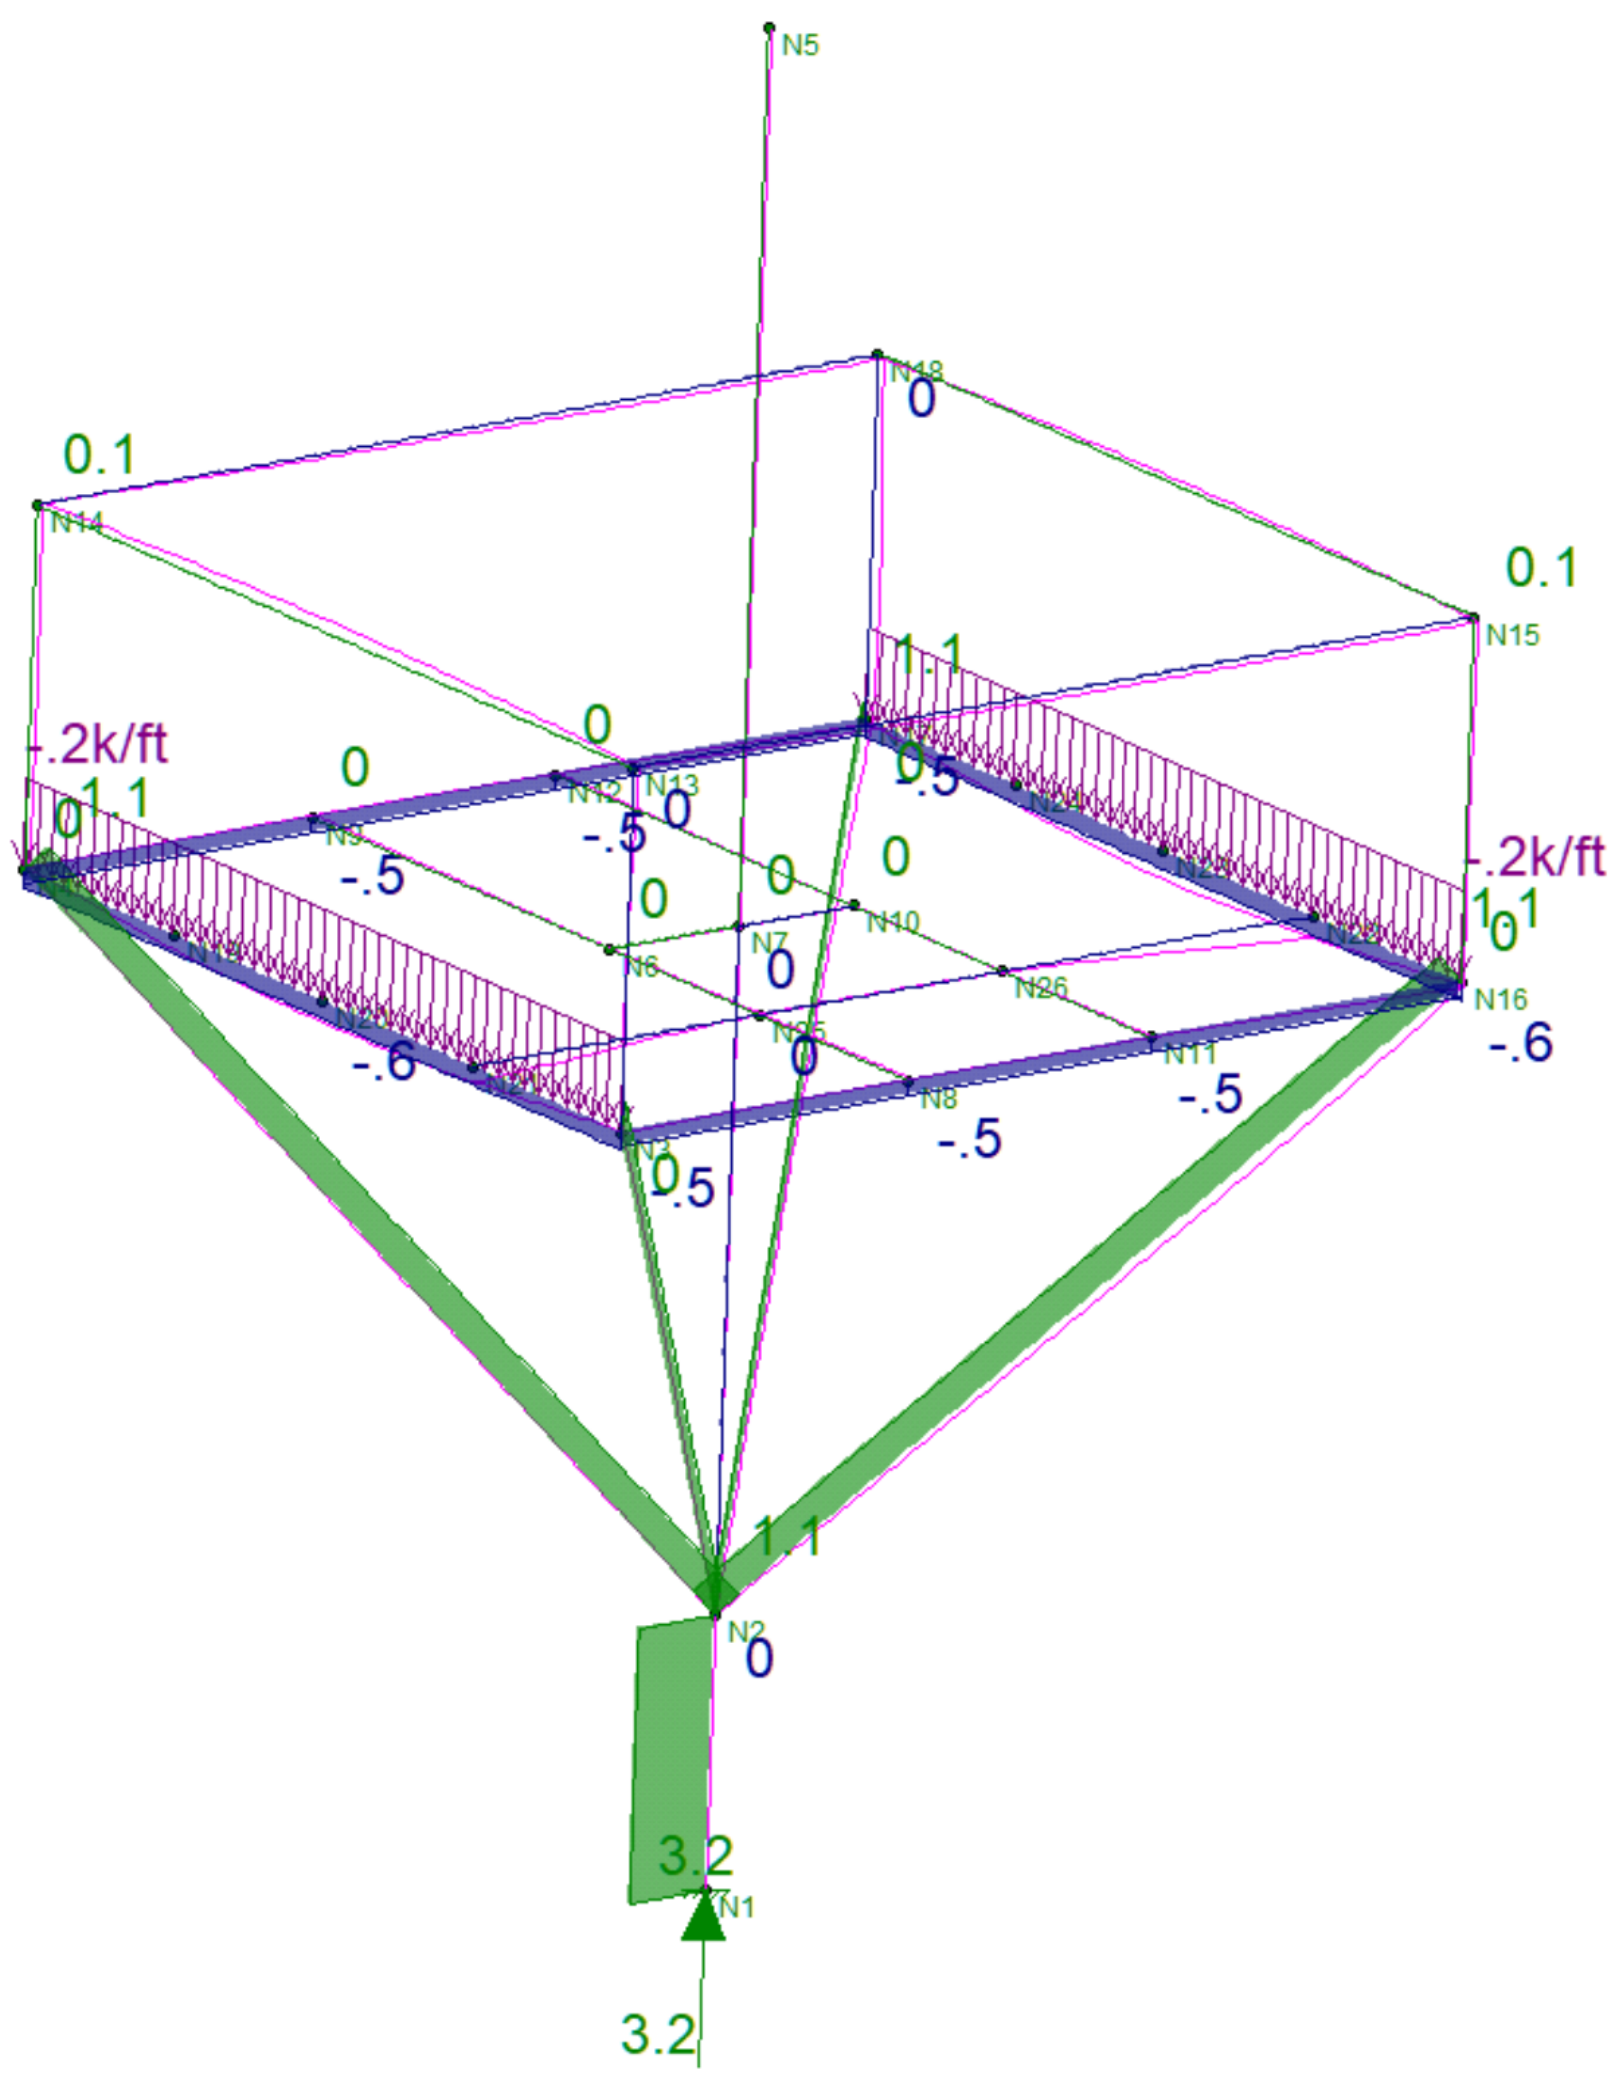

Fig. 2 - Strut Axial Forces

2.1 - 3 | Top rail shear reactions - RISA model

Under the California Building Code (CBC), handrails and guards (railings) must resist a uniform load of 50 plf and a concentrated point load of 200 lbs, both applied horizontally to the top rail. Intermediate rails, balusters, and infill panels must separately withstand a concentrated load of 50 lbs.

```
  =======  <-- Top Rail
     |     <-- Lateral Load (P)
     |
     |
     |
     |  Height (h)
     |
     |
     |
     |
===========  <-- Fixed Support / Deck Surface


Structural Schematic of Railing and Loads Drawn by AI
```

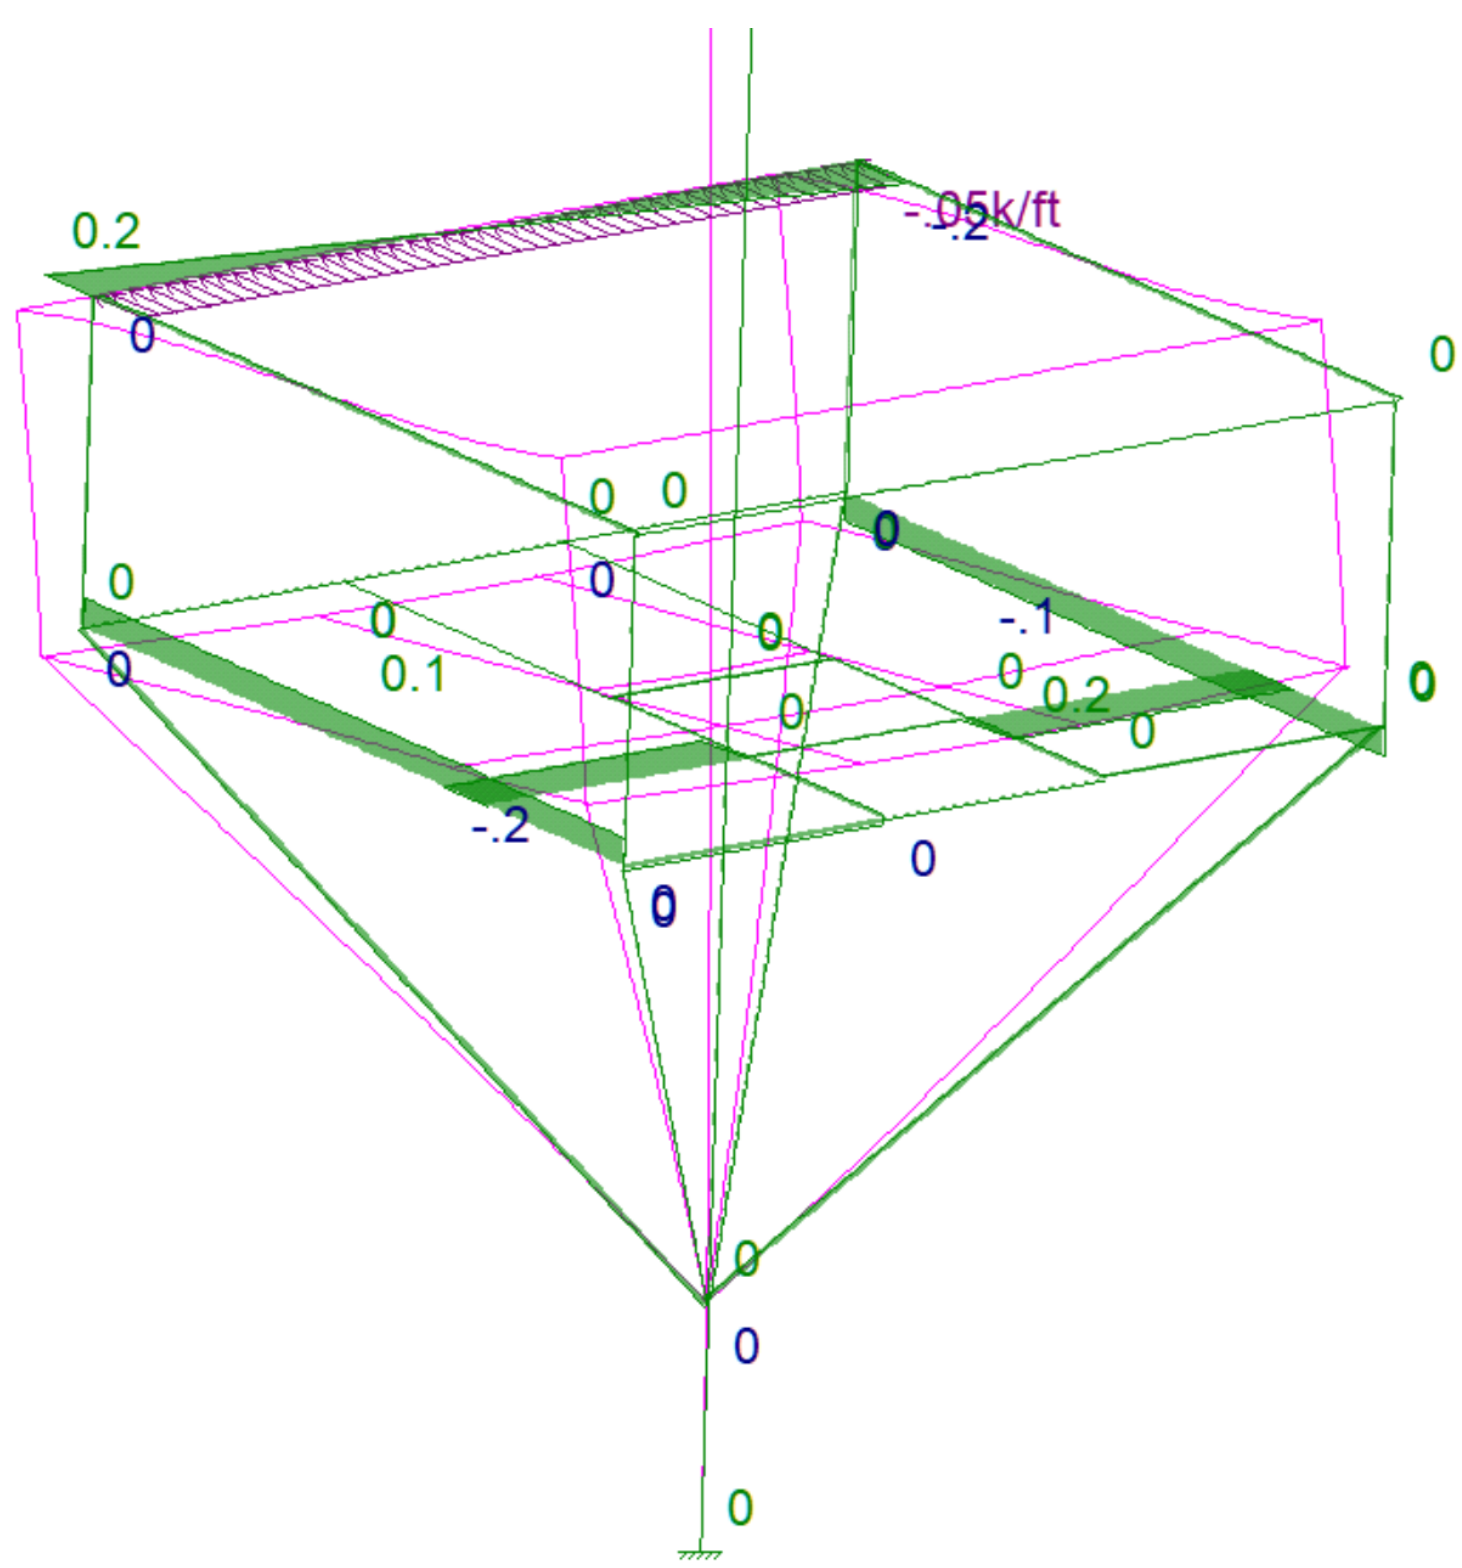

Fig. 3 - Rail Lateral Forces