Table of Contents

2.3-1 | Applied Deck and Railing forces - RISA model

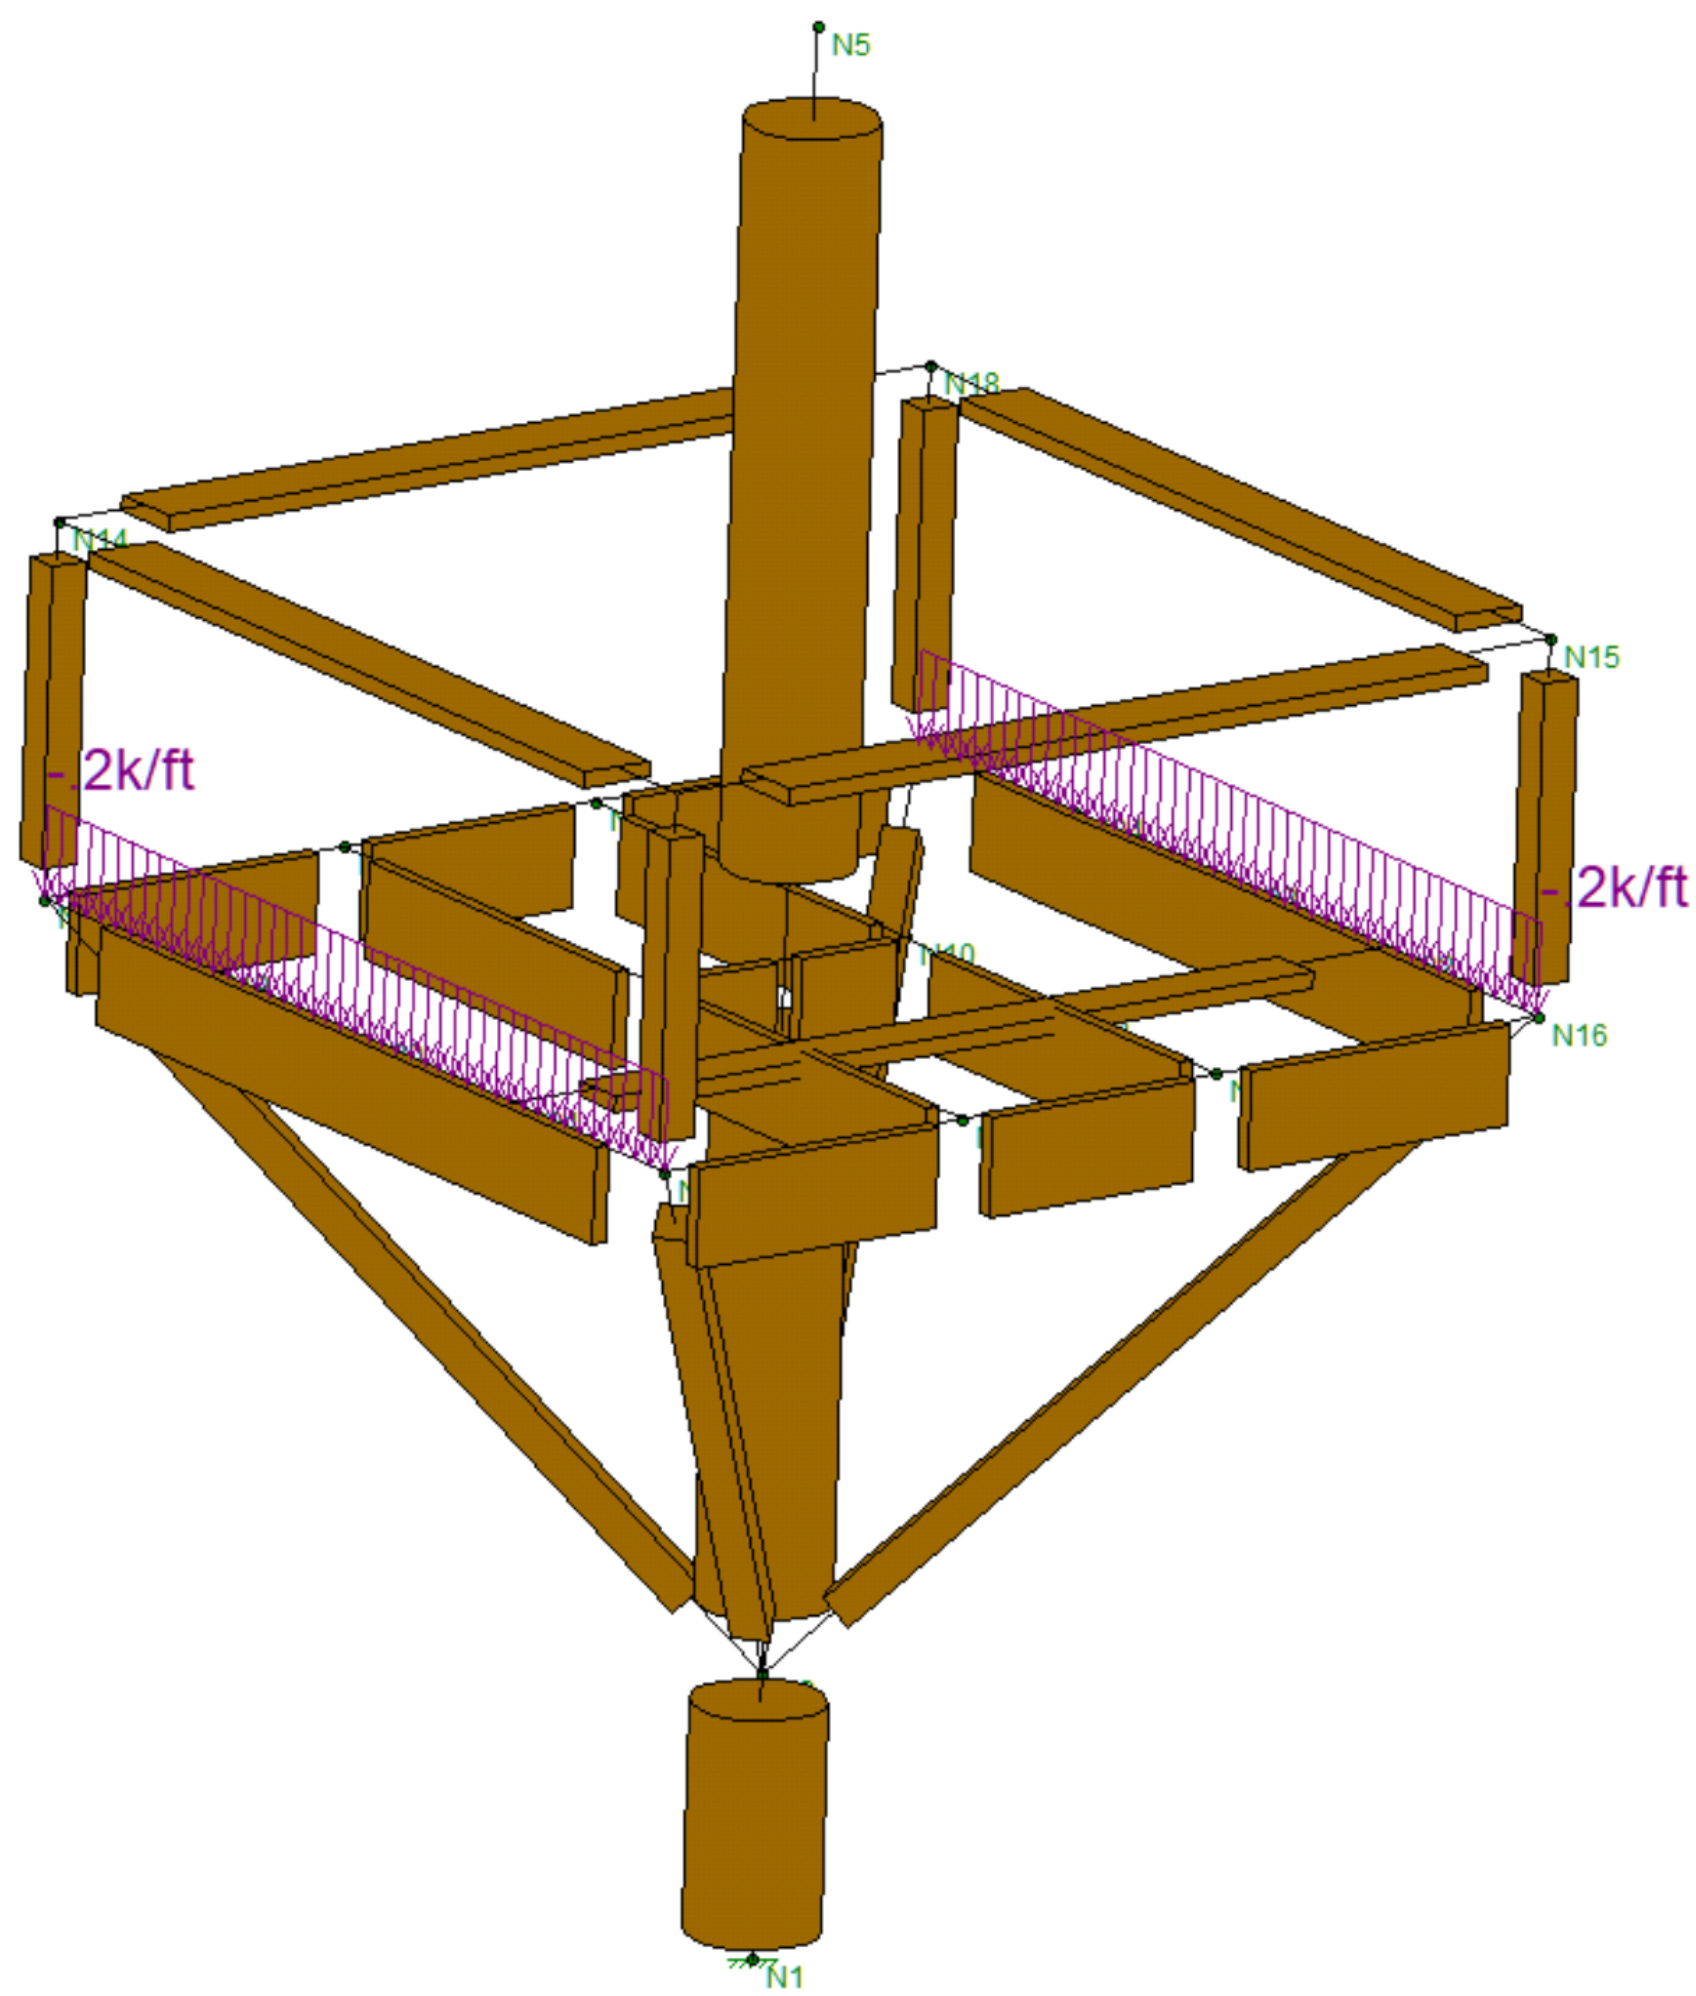

Fig. 1 - Risa Model

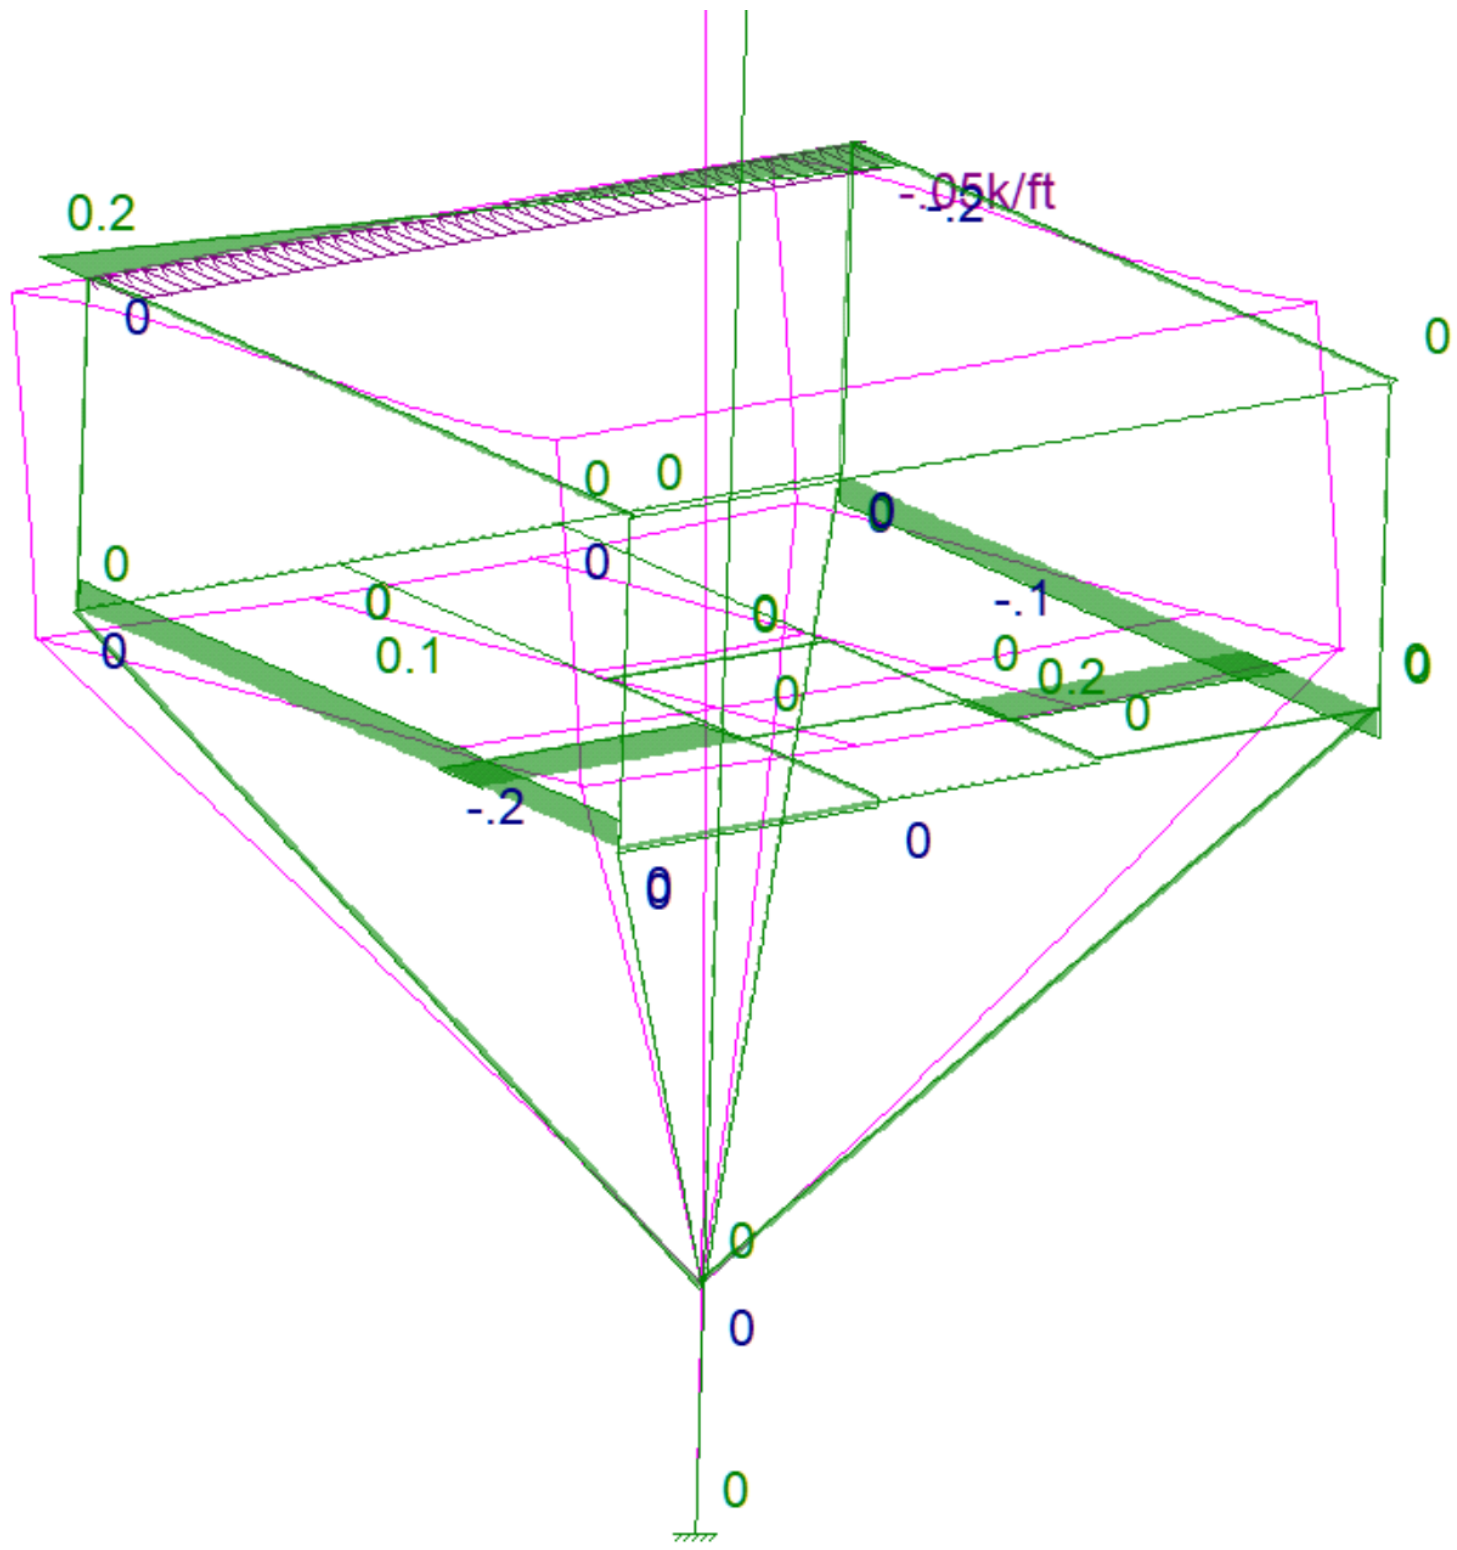

Fig. 2 - Rail Lateral Forces

2.3-2 | Resultant axial forces - RISA model

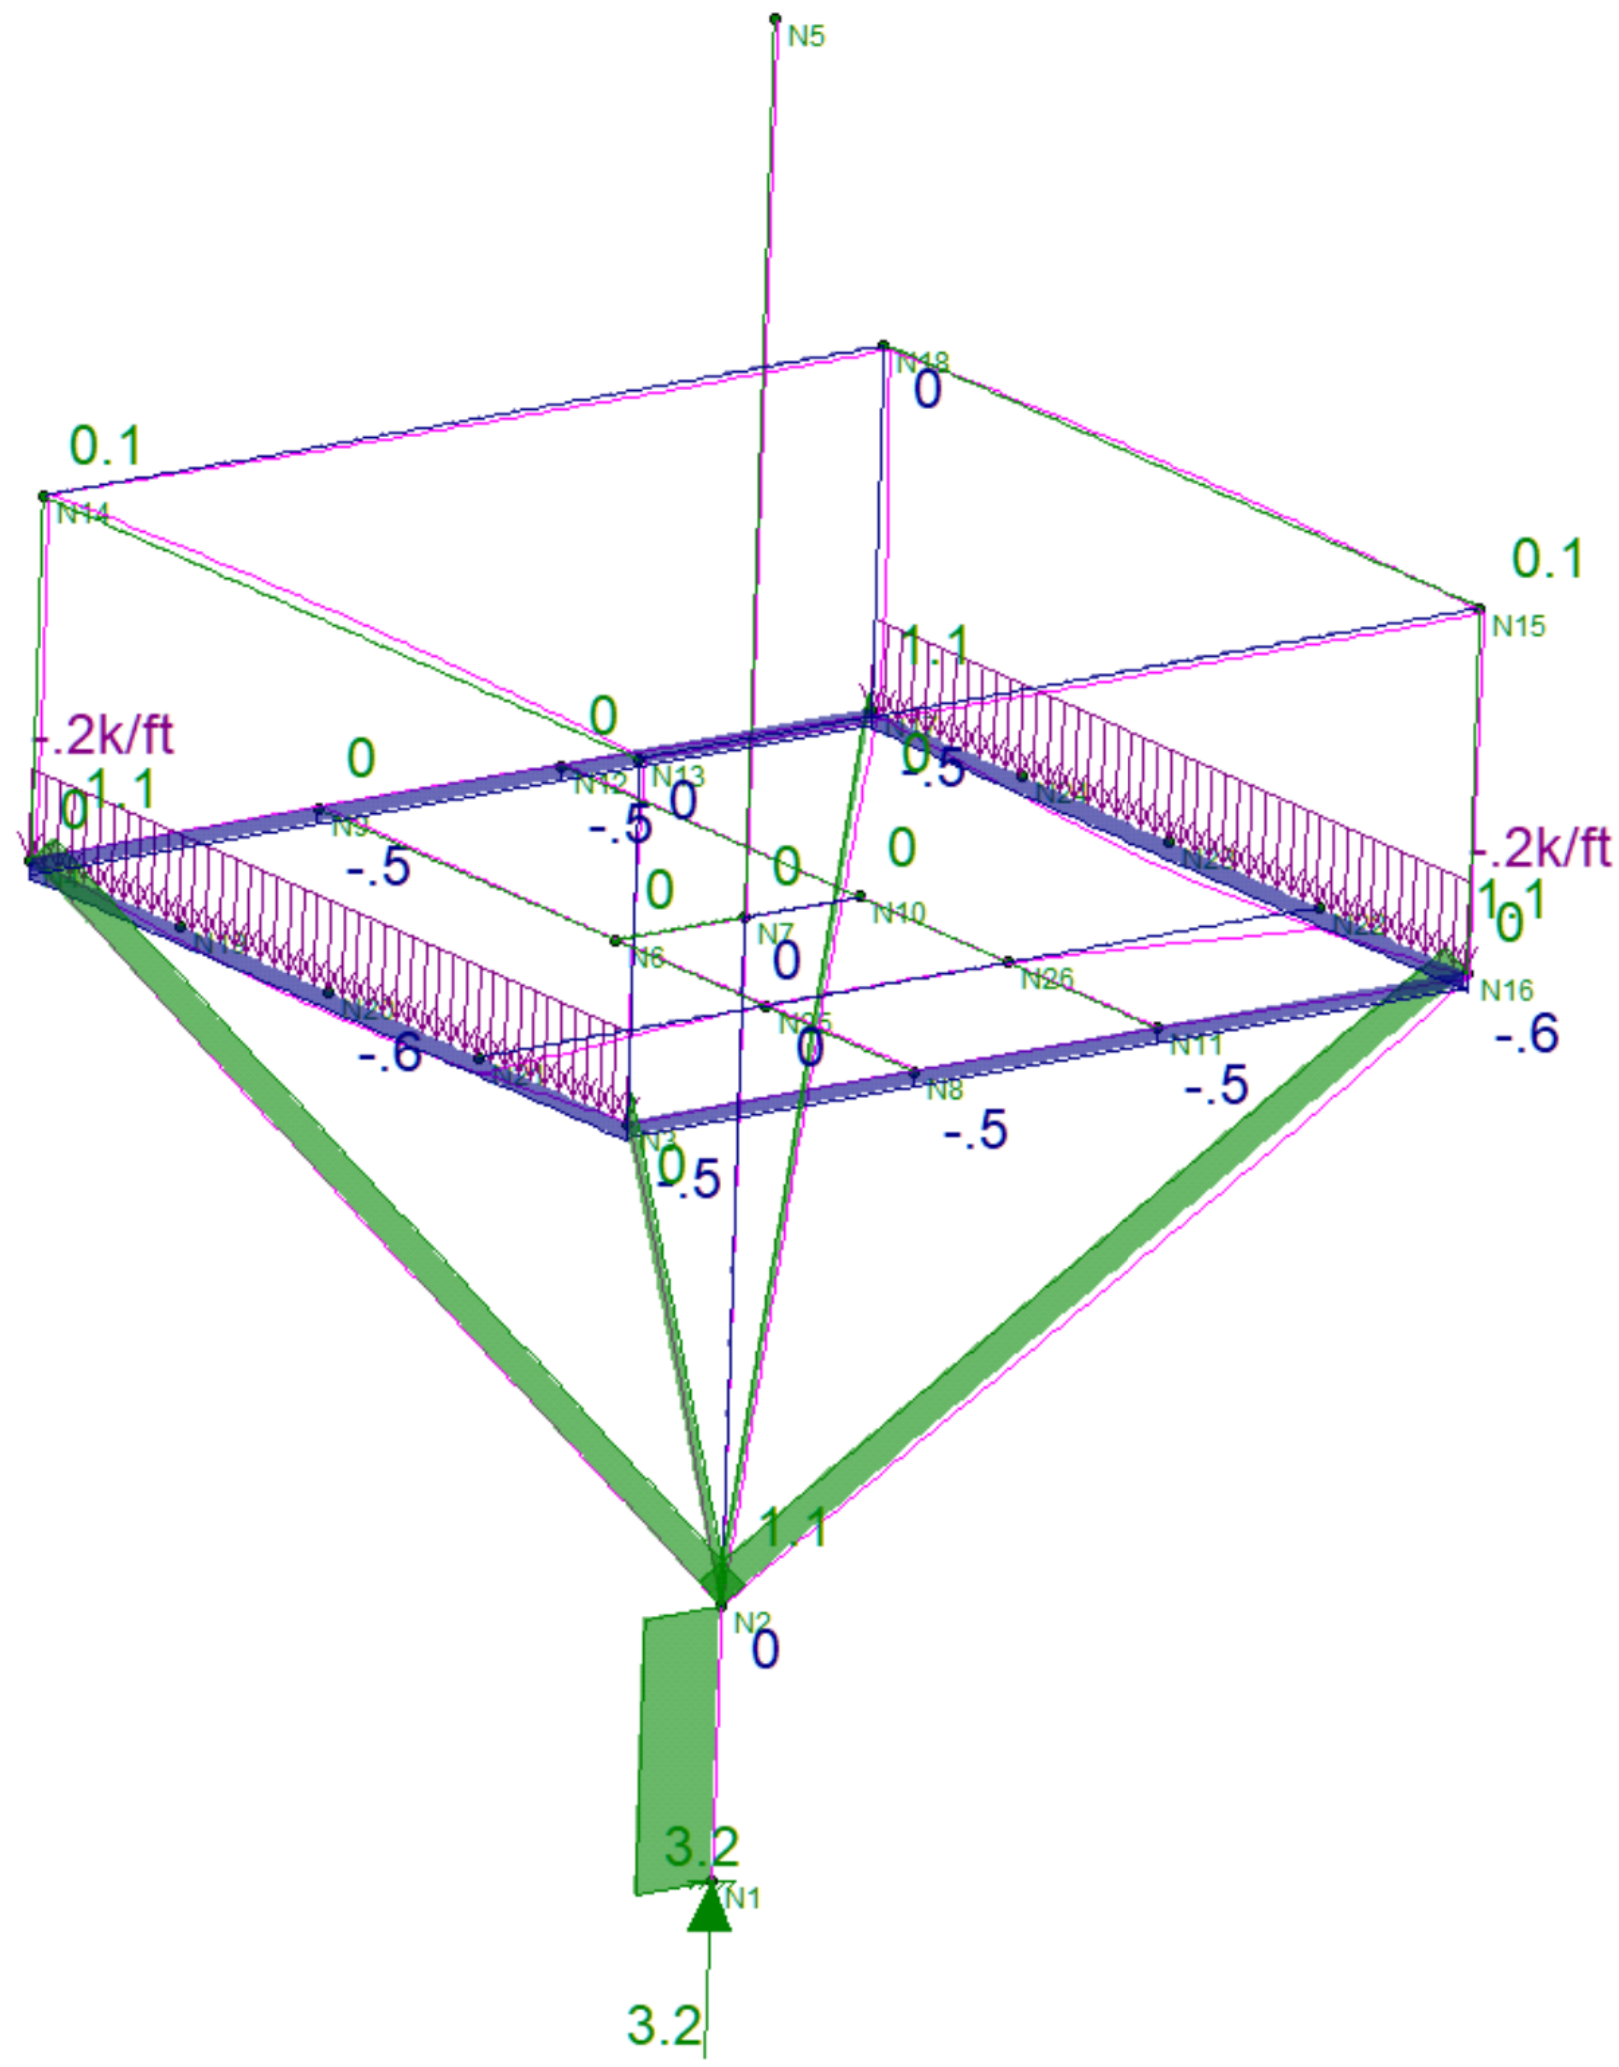

Fig. 3 - Strut Axial Forces

2.3-3 | Top rail shear reactions - RISA model

```
Under the California Building Code (CBC), handrails and guard railings
must resist a uniform load of 50 plf and a concentrated point load of 200
lbs, both applied horizontally to the top rail. Intermediate rails,
balusters, and infill panels must separately withstand a concentrated load
of 50 lbs.

Structural Schematic of Railing and Loads (drawn by AI)

  =======  <-- Top Rail
     |     <-- Lateral Load (P)
     |
     |
     |
     |  Height (h)
     |
     |
     |
     |
===========  <-- Fixed Support / Deck Surface
```