

Table of Contents

[2.1 | Applied deck forces - RISA model](#)

[2](#)



orphan:



2.1 | Applied deck forces - RISA model

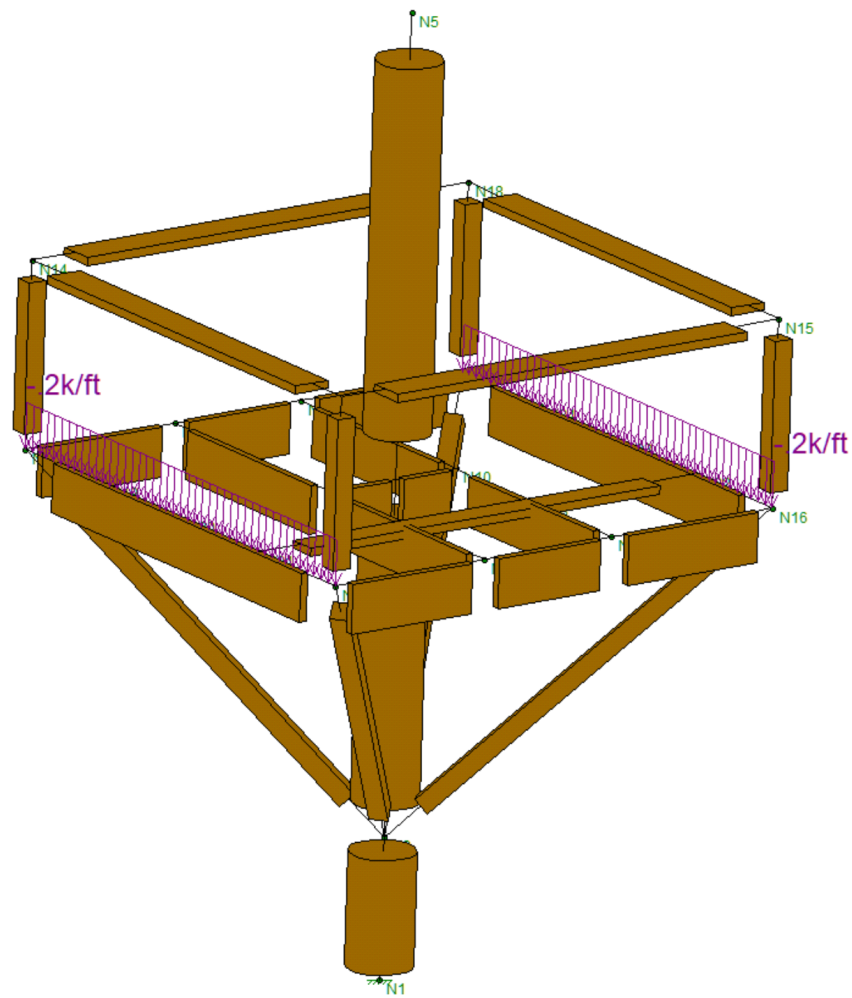


Fig. 1 - Risa Model

2.1 - 2 | Resultant axial forces - RISA model


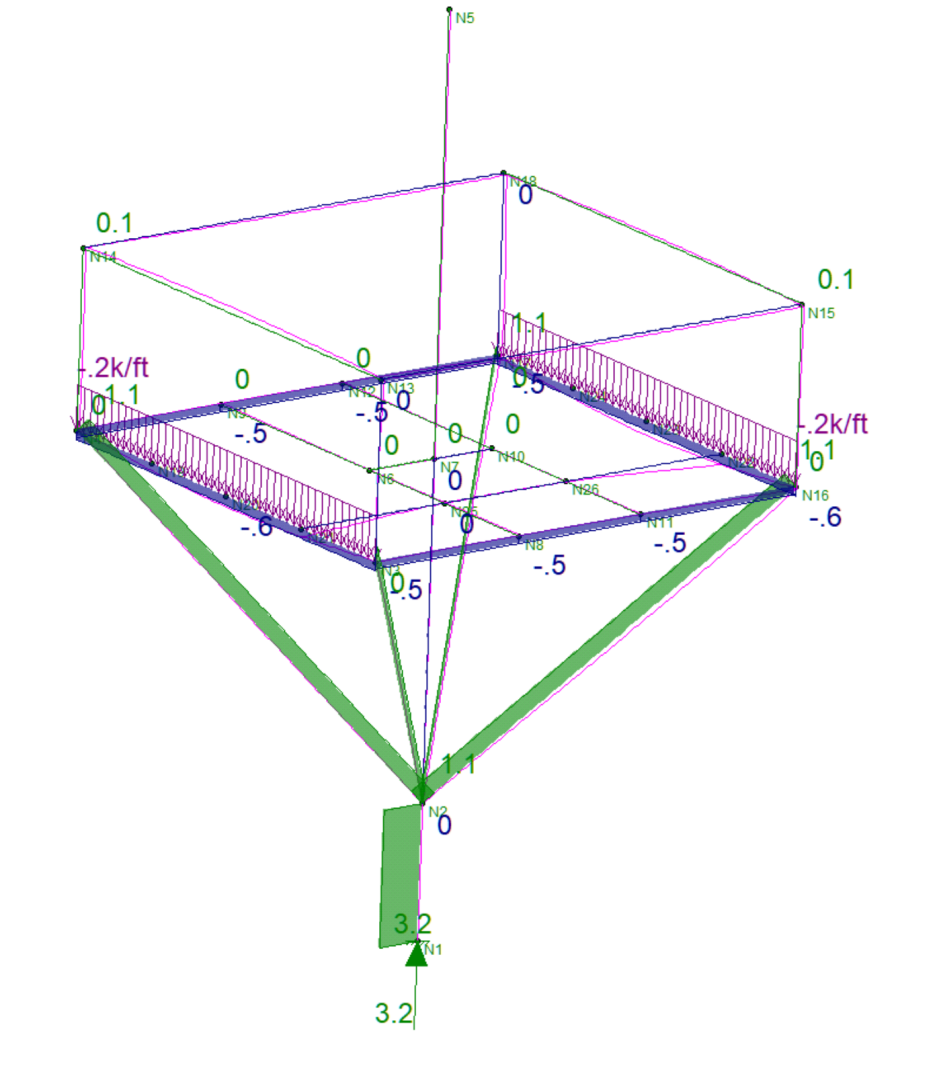


Fig. 2 - Strut Axial Forces



2.1 - 3 | Top rail shear reactions - RISA model

Under the California Building Code (CBC), handrails and guards (railings) must resist a uniform load of 50 plf and a concentrated point load of 200 lbs, both applied horizontally to the top rail. Intermediate rails, balusters, and infill panels must separately withstand a concentrated load of 50 lbs.

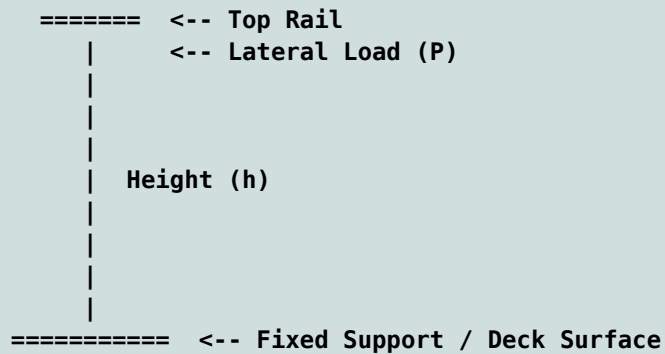

Structural Schematic of Railing and Loads Drawn by AI

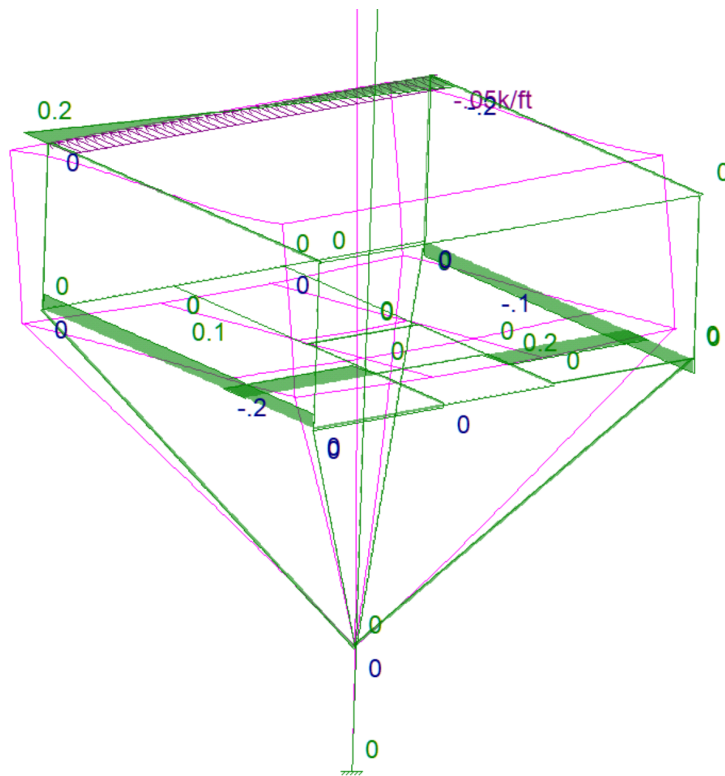


Fig. 3 - Rail Lateral Forces

