HOiN 深圳市弘印电子科技有限公司
Shenzhen Hoin Electronic Technology Co.,Ltd

中文   English   ES   RU

Home   Products   About Us   Join Us   Services&Support   News   Contact Us

More About Our Products
Product Center

HOP-E200	HOP-HL58	HOP-E300	HOP-H58	HOP-E58
58MM	58MM	80mm	58mm	58MM
58mm Mini Portable Thermal Printer	58mm Mini Portable printer	80mm Portable Thermal Printer	58mm Thermal Printer	Big Gear Thermal Receipt Printer
58mm Mini Portable Thermal Printer	58mm Mini Portable printer	80mm Portable Thermal Printer	58mm Thermal Printer	Big Gear Thermal Receipt Printer

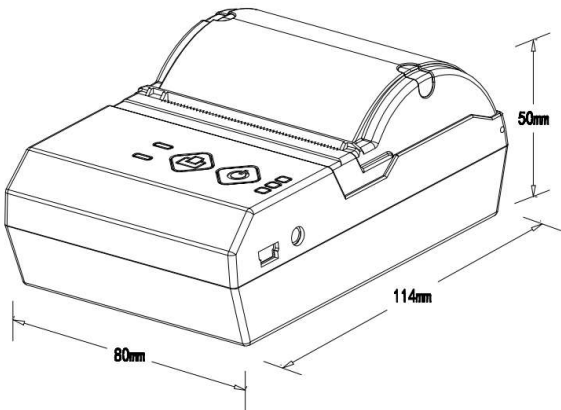| HOP-E801	HOP-H801
80MM	80MM
80mm Thermal Receipt Printer	80mm Thermal Receipt Printer
80mm Thermal Receipt Printer	80mm Thermal Receipt Printer

HOP-E200 58mm Mini Portable Thermal Printer   Features   **Parameter**   Accessories   Application

Item		Parameter
Print parameter	Printing Method	Thermal Line
	Effective Printing Width	48mm
	Resolution	384 dots/line（8dots/mm，203dpi）
	Priting Speed	70mm/S
	Interface	USB，Serial，Bluetooth
	Line spacing	3.75mm（Can adjust line spacing by command）
	Line No.	Font A:32 character /Line Font B:42 character/Line Simple/Traditional Chinese-16 lines
	Character	The standard GB18030 simplified / traditional Chinese characters library

Hoin Printer
Online Service
- Sales1
- Sales2
- Sales3
- Support
- Services

	Character Size	ANK character，Font A：1.5×3.0mm（12×24 dots） Font B：1.1×2.1mm（9×17 dots）Simplified/Traditional：3.0×3.0mm(24×24 dots）
Bar code character	Extended character set	PC437/Katakana/PC850/PC860/PC863/PC865/WestEurope/Greek/Hebrew/EastEurope/Iran/WPC1252/PC866/PC852/PC858/IranII/Latvian/Arabic/PT151,1251/PC737/WPC/1257/ThaiVietnam/PC864/PC1001/(Latvian)/(PC1001)/(PT151,1251)/(WPC1257)/(PC864)/(Vietnam)/(Thai)
	Bar code	1D.Bar code：UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)CODE39/ITF/CODABAR/CODE93/CODE128 2D.Bar code：QRCODE
Graphics printing	Graphics printing	Supports bitmap download and print (support each bitmap size Max.8K, download up to 5pcs)
Power saving Mode	Smart power saving	Support
	Variable speed printing	Support
	Consumption	Support
	Dormancy	Support
Dection	Sensor	Lack of paper detection
Indicator	Power Display	Support
	Charge Indicator	Support
	Lack of paper	Support
	Beep	Lack of paper,printing abnormal alarm
Paper	Type	Thermal
	Width	57.5±0.5mm
	thickness	≤0.12mm
	Diameter	≤40mm
	Feed	Easy（Clameshell feed）
Commands	Commands	ESC/POS
Power	Type	Rechargeable Lithium polymer battery
	Capacity	2000mAh/7.4V
	Charger	9.0V/2A
Buffer	Input	4KB
	NV Flash	40KB
Physical features	Weight	224g
	Dimension	114*80*50mm
Environment	Operating	Temp：5～45℃，Humidity：10～80%
	Storage	Temp：-10～50℃，Humidity：10～90%（No Dew）
Reliability	Print head life	50KM（Printing Density≤12.5）
Software	Driver	Android,IOS,Linux,Win2000,Win2003,WinXP,Win7,Win8,Win8.1