



Commercial and Residential



Specializing in Concrete Restoration & Waterproofing

Demobilization

1. Remove all of the Property protection.
2. Install final grade soil at all work locations. The final grade shall match the height that was existing.
3. Grout in any doles that had to be drilled into the tiles or flooring to secure the protection walls.
4. Pressure clean all work areas. Including patios, pools glass sliders, rear walls of the homes.
5. Refill the pools that had to be drained to access the work. The association shall take care of the Chemicals.
6. Remove all equipment off of the site.

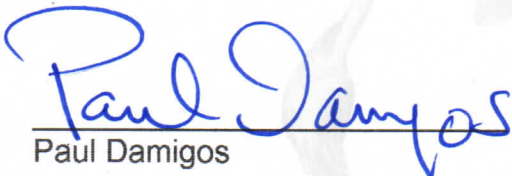
The total estimated cost for all of the above mentioned work shall be. **\$197,500**

The quantities estimated for this block replacement portion of this project are listed below. Should the quantities increase there shall be an additional charge for that item also listed below.

Remove and Erect new block wall 125 LF	Additional cost if over \$ 35 SF
Remove and replace the existing concrete footer 125 LF	Additional cost if over \$ 100 LF
Install new stucco 2700 SF	Additional cost if over \$ 15 SF
Remove and reinstall new sidewalk on US 1 600 SF	Additional cost if over \$ 20 SF

Thank you for the opportunity to offer to your association this proposal to complete work on your Prestigious property.

Respectfully,


Paul Damigos