



NebuLink Controller NLC1110

Block Diagram

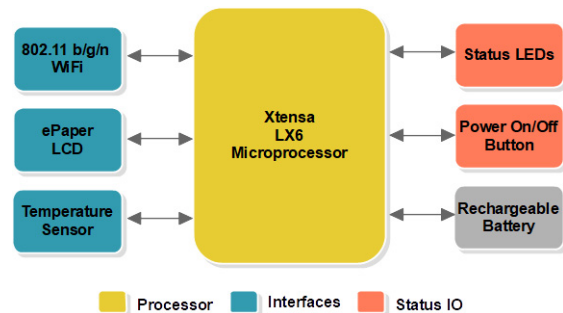

Introduction

NebuLink Controller NLC1110 is an industry standard handheld wireless temperature probe. It sense the temperature data and display it on LCD for runtime decision. It also supports to transfers the sensing data wirelessly to cloud using Nebulae and Yalgaar. It supports industrial K-type sensors which helps to use in high temperature applications. It supports 1000mAH battery for durable operation. It provides an easy interface for end usage. The status LEDs help to identify the status of the controller and debug it's operation.

NLC1110 is powered by Nebulae and Yalgaar, allowing end user to easily integrate in their existing system and manage it's data from cloud. It's easy to use, compact and complete package for industrial use cases.

Application

- Monitoring: DG temperature monitoring
- Motor protection: Winding & Bearing temperature
- Drying Ovens, Fermentation Processes
- Machine condition monitoring

Benefits

- Handheld Battery operated
- Compact and ready to deploy
- Displays results in realtime
- Built-in light weight web server for remote configuration
- Ready Yalgaar SDKs for end application development

Specifications

Processor	
Processor	Xtensa LX6 microprocessor
Frequency	240 MHz
Storage	
Internal Memory	
External Memory	
End User Application Stack	
Supported	NebuLink Gateway RTOS SDK, Yalgaar SDK
Electrical Specification	
Battery	1000mAH Li-Polymer
Rechargeable	Yes
Battery Charging Supply	USB based 5 VDC @ 1.5A
Operating Temperature	°C
Interface	
Temperature Sensor	K Type Temperature Sensor (MAX6675)
Temperature Range	0 to 900 °C with accuracy ±1.25 °C and resolution of 0.25 °C
Sensing Frequency	Every 1 minutes
LCD	2 Inch E-Paper LCD with low power
Communication Interface	
Wi-Fi	IEEE 802.11 b/g/n AP/STA mode
General	
Switch	Power ON-OFF
LEDs	1 x Battery Status LED, 1 x Power LED
Mechanical	
Size (L x W x H) in mm	
Weight	
Casing	Plastic-ABS, Handheld, Tabletop
Accessory	
Antenna	1 x RP-SMA Whip-Tilt

For more information contact at <https://www.nebulae.io/> or sales@nebulae.io