


NebuLink Controller NLC1200



Block Diagram

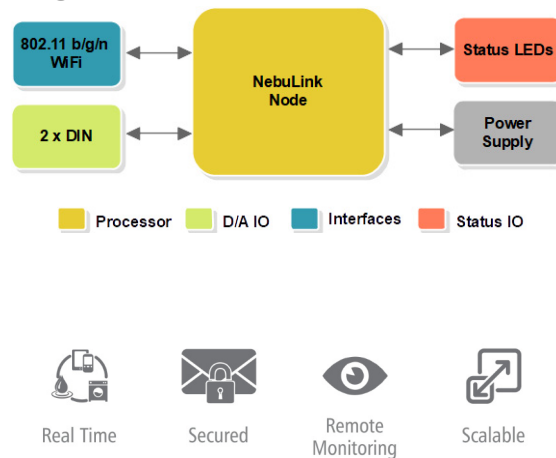

Introduction

NebuLink Controller NLC1200 is an industry standard data acquisition system which transfers the sensors information wirelessly to cloud. It comes with 2 Analog input channels for interfacing with sensors and control the operations in industry. In-built fuse protection circuit helps to protect against unwanted input fluctuation. It provides an easy interface for configuring I/Os of the controller for end usage. The status LEDs help to identify the status of the controller and debug its operation.

NLC1200 is powered by Nebulae and Yalgaar, allowing end user to easily integrate in their existing system and manage its data from cloud. It's easy to use, compact and complete package for industrial use cases.

Application

- Generator Monitoring and Protection
- Monitoring of Air compressor, pump, transformers, fans and blowers DG temperature monitoring
- Motor protection: Winding & Bearing temperature
- Water and Waste-Water remote monitoring
- Drying Ovens, Fermentation Processes
- Flow Monitoring
- Machine condition monitoring

Benefits

- Built-in light weight web server for remote configuration
- Ready Yalgaar SDKs for end application development
- Compact and ready to deploy
- Pole/Wall mount enclosure and easy to install

Specifications

Processor	
Processor	
Frequency	
Storage	
Internal Memory	
External Memory	
End User Application Stack	
Supported	NebuLink Gateway RTOS SDK, Yalgaar SDK
Electrical Specification	
Power Supply	230 VAC, 50Hz
Operating Temperature	
I/O Interface	
Analog Input	Isolated 2 Channels, 230VAC
Communication Interface	
Wi-Fi	802.11 b/g/n AP/STA mode
General	
LEDs	1 x Wi-Fi Status LED, 1 x Power LED
Mechanical	
Size (L x W x H) in mm	130 x 130 x 75
Weight	
Casing	Plastic-ABS, IP65 rated, Pole/Wall mounting

For more information contact at <https://www.nebulae.io/> or sales@nebulae.io