


NebuLink Controller NLC1242



Introduction

NebuLink Controller NLC1242 is an industry standard data acquisition system which transfers the sensors information wirelessly to cloud. It comes with 2 Analog input, 4 Digital input and 2 Digital open drain output channels for interfacing with the sensors and control the operations in industry. In-built fuse protection circuit helps to protect against unwanted input fluctuation. It provides an easy interface for configuring I/Os of the controller for end usage. The status LEDs help to identify the status of the controller and debug its operation.

NLC1242 is powered by Nebulae and Yalgaar, allowing end user to easily integrate in their existing system and manage its data from cloud. It's easy to use, compact and complete package for industrial use cases.


Application

- Generator Monitoring and Protection
- Monitoring of Air compressor, pump, transformers, fans and blowers DG temperature monitoring
- Motor protection: Winding & Bearing temperature
- Water and Waste-Water remote monitoring
- Electrical Sub-station monitoring
- Drying Ovens, Fermentation Processes
- Flow Monitoring
- Power Monitoring
- Metal and mining applications
- Machine condition monitoring

Benefits

- Built-in light weight web server for remote configuration
- Ready Yalgaar SDKs for end application development
- Compact and ready to deploy
- Wall mount enclosure and easy to install

Block Diagram

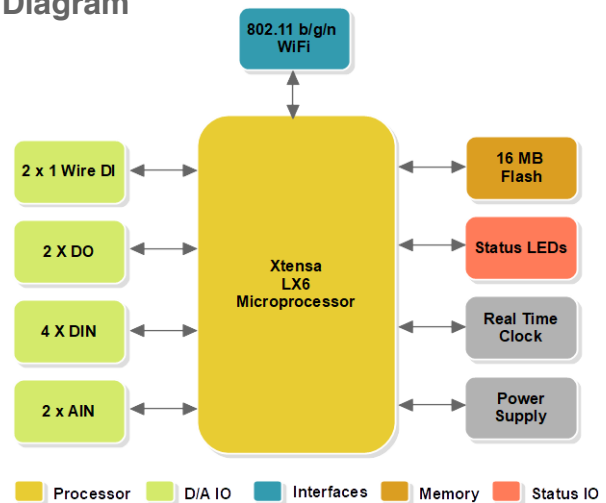

Specifications

Processor	
Processor	Xtensa LX6 microprocessor
Frequency	240 MHz
Storage	
Internal Memory	448 KB of ROM, 520 KB of On-chip SRAM, 8 KB of SRAM in RTC
External Memory	16MB Flash
End User Application Stack	
Supported	NebuLink Gateway RTOS SDK, Yalgaar SDK
Electrical Specification	
Power Supply	16 - 28 VDC @ 1A
Operating Temperature	-40 to 85 °C
I/O Interface	
Analog Input	2 Channels, 12-bit 0-10V/4-20mA
Digital Input	Isolated 4 Channels, 24VDC
Digital Open Drain Output	Isolated 2 Channels, 24VDC, 8mA max.
1 Wire Digital Input	2 Channels, 3.3VDC
Communication Interface	
Wi-Fi	802.11 b/g/n AP/STA mode
General	
LEDs	1 x Status LED, 1 x Power LED
Mechanical	
Size (L x W x H) in mm	115 x 90 x 55
Weight	250 g
Casing	Plastic-Polycarbonate, IP65 rated, Wall mounting
Accessory	
Antenna	1 x RP-SMA Whip-Tilt

For more information contact at <http://www.nebulae.io/> or sales@nebulae.io