



NebuLink Gateway NLG1300



Application Diagram

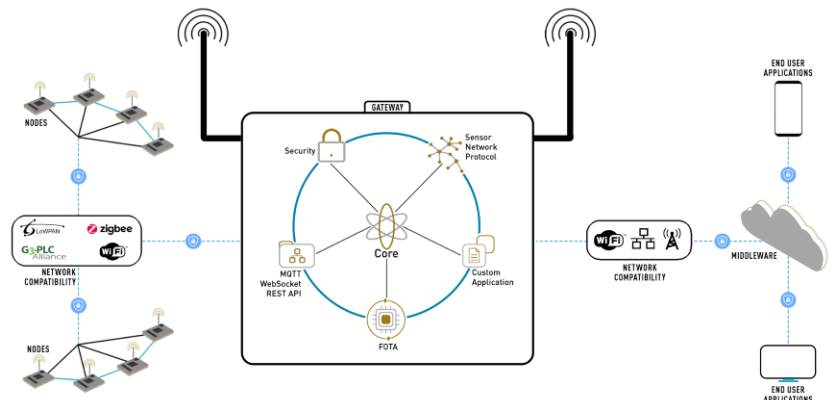

Introduction

NebuLink Gateway NLG1300 comes with RF, Wi-Fi, Cellular and GPS interface, best fit for any commercial applications with location monitoring. It is pre-programmed with Nebulae IoT framework which gives flexibility to develop an end application with high security for networking, embedded control, sensing and easy manageability of device. The advance peripheral mechanism provides configuration and access control from a remote location using NebuLink Middleware services to integrate with third-party cloud infrastructure.

Application

- Real-time data acquisition, processing and transmission
- Remote management of devices and assets

Benefits

- Real time location monitoring
- Redundant network connectivity for remote monitoring
- Maximize production
- Remote management
- Reduce downtime
- Reduce operational cost
- Ensure safe operations
- Automize the system
- Manage assets
- Alert notification for faults and failures
- Third party cloud integration

Specifications

Processor	
Processor	Dual Core Xtensa® 32-Bit LX6
Frequency	240 MHz
Storage	
Internal RAM	~300KB
External RAM	4MB PSRAM
Internal Flash	16MB
External ROM	4KB EEPROM (For Gateway configuration)
Software Stack	
Supported	NebuLink Gateway RTOS SDK Free RTOS SDK
Electrical Specification	
Power Supply	5V DC@3A
Operating Temperature	0 - 50 °C
Communication Interface	
RF	802.15.4
Wi-Fi	802.11 b/g/n
Cellular	FDD LTE: B1/B3/B5/B7/B8/B20, WCDMA: B1/B5/B8, GSM: 900/1800
General	
Reset	Yes
WPS Switch	Yes
LEDs	3 x Status Green LED
Mechanical	
Size (L x W x H) in mm	111.5 x 111.5 x 29.8
Weight	400 gm
Casing	ABS Wall Mounting
Accessory	
Antenna	2 x RP-SMA Whip-Tilt, 1 x Cellular, 1 x GPS
Programmer	USB Programmer with USB Cable

For more information contact at <http://www.nebulae.io/> or sales@nebulae.io

System Level Solutions
USA | India | UK

Tel.: 91-2692-232 501 / 502 / 001-408-852-0067 / 001-408-705-2339
E-mail: info@slscorp.com • Website: www.slscorp.com