



NebuLink Gateway NLG7600



Application Diagram

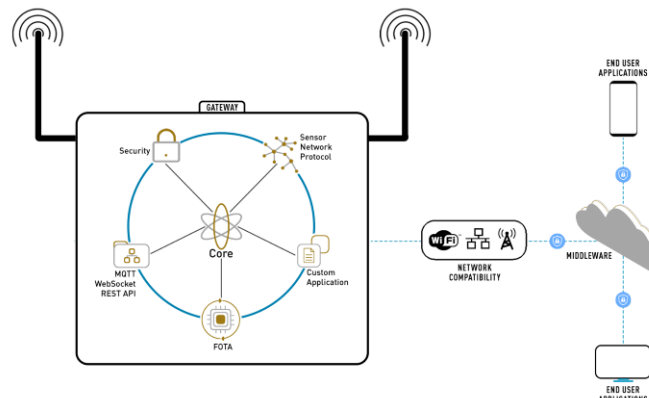

Introduction

NebuLink Gateway NLG7600 is a SCADA RTU units for remote logic control and monitoring in various industrial application. It is powered by ARM Cortex™ A7 processor with multiple interfaces - RS232, RS485, Ethernet, Cellular, Analog and Digital IOs. It offers an easy and user-friendly development support which allows users to implement control logic on controllers using pre-programmed QuecOpen OS. It is designed specifically for low cost battery enabled M2M applications, which provides a long, stable life cycle and easy deployment.

Application

- Infrastructure: ITS, Utility, AMR, Lighting
- Security: Surveillance, Environment, Disaster
- Industry: Livestock, Agriculture, Heavy, Factory
- Device SCADA: PLC, IED, Generator, Sensor
- Building: Security, Energy, Waste Management, Facility, Lighting

Benefits

- Built-in light weight web server for remote monitoring
- Seamless integration with SCADA applications
- Two years warranty

Specifications

Processor	
Processor	ARM Cortex™ A7
Frequency	1.2 GHz
Storage	
Memory	256MB RAM, 20MB Flash for End Application, Upto 32GB microSD
Software Stack	
Supported	QuecOpen™ SDK with validated Modbus RTU, Modbus TCP, DLMS Stack
Electrical Specification	
Power Supply	6 - 24 VDC @ 4A
Supported Battery Supply	3.7/4.2 V, 2000mAh
Operating Temperature	-40 to +85 °C
Humidity	Relative humidity 15% to 93% non condensing
I/O Interface	
Analog Input	2 Channels 0-10V/4-20mA
Digital Input/Counter	Isolated 2 Channels/ 16 bits, Max. Input Frequency 50 Hz, Min. Pulse Width 10 ms
Digital Relay Output	Isolated 1 Channels
Digital Output	Isolated 2 Channels
General Purpose (optional)	6 Channels, 3.3VDC
Communication Interface	
Cellular	FDD-LTE: B1/B2/B3/B5/B7/B8/B20 TDD-LTE: B38/B40 HSPA/UMTS: 900/850/1800/1900/2100MHz GSM/GPRS/EDGE: 850/900/1800/1900MHz
Ethernet	1 x 10/100M/1G bps
Serial	1 x RS232, 1 x RS485, 1 x I2C
GPS	Optional
General	
LEDs	3 x Status LED
Mechanical	
Size (L x W x H) in mm	115 X 110 X 85
Weight	800 gm
Casing	ABS, Rail Mount and Wall Mount, Designed as per DIN43 880 (MCB Type)
Accessory	
Antenna	1 x Cellular, 1 x GPS (optional), 1 x Diversity (optional)

For more information contact at <http://www.nebulae.io/> or sales@nebulae.io

System Level Solutions
USA | India | UK

Tel.: 91-2692-232 501 / 502 / 001-408-852-0067 / 001-408-705-2339
E-mail: info@slscorp.com • Website: www.slscorp.com