


NebuLink Node NLN 300a-2



Benefits

- Ready to go platform for G3-PLC (CENELEC-A and FCC) applications using Nebulae IoT framework
- Meets STCOMET smart meter and PowerLine communication system specs
- Supports dual filter making PowerLine communication less sensitive to conducted noise of switching power supply
- Featuring 800 V avalanche-rugged power section and PWM operation at 115 kHz with frequency jittering for:
 - Lower EMI
 - Current limiting with adjustable set point
 - On-board soft start
 - Safe auto restart after a fault condition
 - Low standby power

Application Example

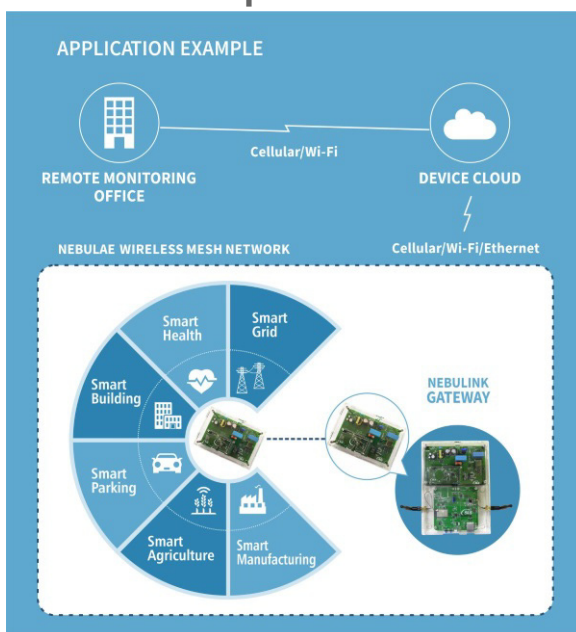

Specifications

Performance	
Data Carriers	36 for CENELEC-A 72 for FCC
Range	Up to several Kms*
TX Power	32 dB
Features	
Processor	32 Bit Ultra-low-power ARM® Cortex® M4
Clock/ Speed	Up to 80 MHz
Internal Memory	160 KB SRAM, 512 KB Flash
Low Power Modes	7
PLC Frequency Bands	CENELEC-A and FCC
PLC Modulation	OFDM (ROBO, DBPSK, DQPSK, D8PSK)
PLC Routing	Nebulae
PLC Coupling	1 Phase to Neutral
Communication Interface	3 x SPI, 4 x I2C, 1 x USART
Multifunctional IO	Up to 26
Timers, RTC	12 x Timers, 1 x RTC
LEDs	4x Status LED, 1 x User LED
Buttons	Reset
Random Number Generator	32-bit
Mounting Type	Table Top
Size (LxWxH in mm)	154.4 x 105.2 x 35.8
Weight	Approx. 400 gm
Electrical Specification	
AC Power Supply	Single Phase 230VAC, 50/60 Hz
Operating Temperature	-40 °C to 85 °C
Storage Temperature	-65 °C to 150 °C
Networking and Security	
Protocol	G3-PLC
Encryption	AES 128 Bit
Firewall	Protects code sensitive and secure data

*Note: *Tested in standard laboratory conditions and it depends on network characteristics and topology*

For more information contact at <http://www.nebulae.io/> or sales@nebulae.io

System Level Solutions
USA | India | UK

Tel.: 91-2692-232 501 / 502 / 001-408-852-0067 / 001-408-705-2339
E-mail: info@slscorp.com • Website: www.slscorp.com