



NebuLink Node NLN 600b (2G)

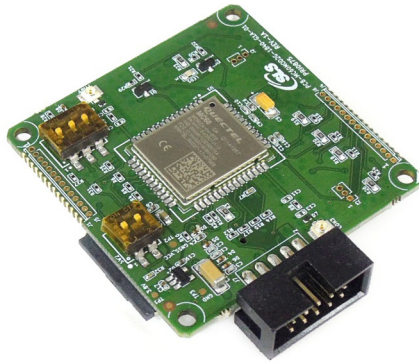

Benefits

- Supports quad-band GSM/GPRS engine and GNSS engine
- A rich set of hardware peripherals such as GPIO, ADC and UART
- Ready to go platform for cellular applications using Nebulae stack
- Supports various internet service protocols

Application Example

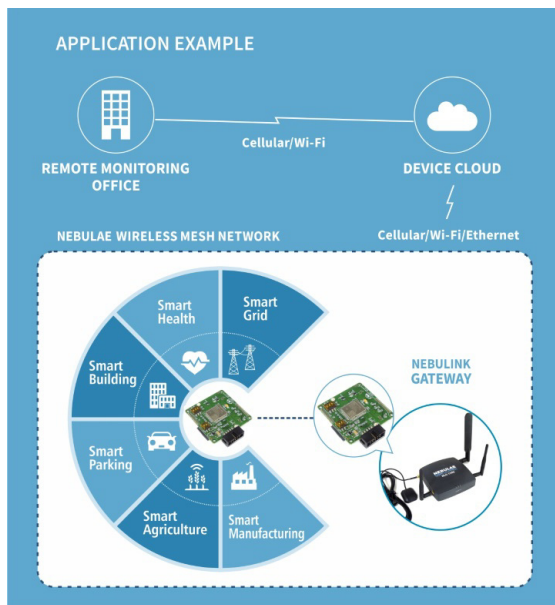

Specifications

Performance		
TX Power	33 dBm (Class 1, Class 4)	
RX Sensitivity	-110 dBm	
Features		
Frequency Band	GSM/GPRS: 850/900/1800/1900 MHz GPS: 1575.42 ± 2MHz GLONASS: 1602 ± 4MHz	
Serial Interface	1 x Full UART, 1 Debug UART, 1 x Auxiliary UART (GNSS Communication only)	
Connectivity	GSM/GPRS	
Bluetooth	Supported	
SIM Support	Standard Type Single SIM	
Data Rate	As per cellular mode selection	
Mounting Type	1.27 mm Pitch SMD and Throughhole	
Antenna Options	U.FL Connector	
Size (LxWxH in mm)	18.7 x 14.45 x 2.1	
Electrical Specification		
Supply Voltage	3.3V~4.6V DC, 3.8V Typ 2A	
Current Consumption	Sleep (GNSS is Powered off)	~1.2 mA
	Tx & RX	1.6 A
Operating Temperature [#]	-35 °C to 80 °C	
Storage Temperature [#]	-45 °C to 90 °C	
Networking		
Protocol	TCP/UDP, FTP, PPP, HTTP, NTP, PING	
GPS Channels	33 tracking channels 99 acquisition channels 210 PRN channels	
Modulation	PCM	
Note: [#] Ideal temperature condition based on component's rating		

For more information contact at <http://www.nebulae.io/> or sales@nebulae.io

System Level Solutions
USA | India | UK

Tel.: 91-2692-232 501 / 502 / 001-408-852-0067 / 001-408-705-2339
E-mail: info@slscorp.com • Website: www.slscorp.com