


# NebuLink Node NLN 600c (4G)



## Benefits

- A series of LTE-FDD/LTE-TDD/WCDMA/GSM wireless communication module with receive diversity
- Embedded power management unit (PMU) featuring ultra-low deep-sleep current consumption
- A rich set of hardware peripherals such as USB, GPIO, ADC and UART
- Ready to go platform for cellular applications using Nebulae stack
- Supports various internet service protocols
- Worldwide LTE, UMTS/HSPA+ and GSM/GPRS/EDGE cover-age

## Application Example

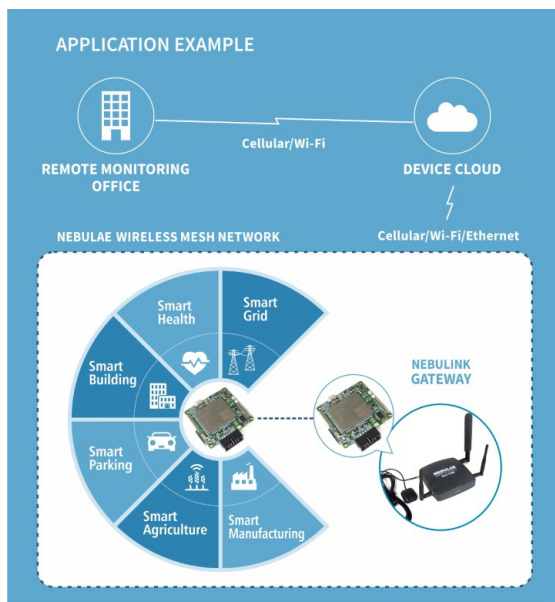

## Specifications

| Performance                                                          |                                                                                                                                                                             |                        |
|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| TX Power                                                             | 21.11 to 32.3 dBm                                                                                                                                                           |                        |
| RX Sensitivity                                                       | -93.3 to -106.7 dBm                                                                                                                                                         |                        |
| Features                                                             |                                                                                                                                                                             |                        |
| Processor                                                            | ARM® Cortex® A7                                                                                                                                                             |                        |
| Frequency                                                            | up to 1.2 GHz                                                                                                                                                               |                        |
| Memory                                                               | 20 MB Rootfs, 100 MB User Data, 100 MB SRAM                                                                                                                                 |                        |
| Frequency Band                                                       | FDD: B1/B3/B5/B7/B8/B20<br>UMTS/WCDMA: B1/B5/B8<br>GSM: 900/1800 MHz<br>GPS/Galileo/QZSS: 1575.42 ± 1.023 MHz<br>GLONASS: 1597.5~1605.8 MHz<br>BeiDou: 1561.098 ± 2.046 MHz |                        |
| Serial Interface                                                     | 1 x Debug UART, 3 x Application UART port, 1 x I2C, 1 x SPI, 1 x PCM, 2 x ADC, 2 x SDIO                                                                                     |                        |
| Ethernet                                                             | 10/100/1000Mbps                                                                                                                                                             |                        |
| Bluetooth*                                                           | -                                                                                                                                                                           |                        |
| USB Interface                                                        | 1 x USB 2.0 Device                                                                                                                                                          |                        |
| Data Rate                                                            | As per cellular mode selection                                                                                                                                              |                        |
| SIM Support                                                          | Standard Type Single SIM                                                                                                                                                    |                        |
| Mounting Type                                                        | 1.27 mm Pitch SMD and Throughhole                                                                                                                                           |                        |
| Antenna Options                                                      | U.FL Connector                                                                                                                                                              |                        |
| Size (LxWxH in mm)                                                   | 32 x 29 x 2.4                                                                                                                                                               |                        |
| Electrical Specification                                             |                                                                                                                                                                             |                        |
| Supply Voltage                                                       | 3.3V~4.3V DC, 3.8V Typ 2A                                                                                                                                                   |                        |
| Current Consumption                                                  | Power Off<br>Sleep <sup>#</sup><br>TX& RX                                                                                                                                   | 20 µA<br>3 mA<br>1.8 A |
| Operating Temperature <sup>#</sup>                                   | -35 °C to 75 °C                                                                                                                                                             |                        |
| Storage Temperature <sup>#</sup>                                     | -40 °C to 90 °C                                                                                                                                                             |                        |
| Networking                                                           |                                                                                                                                                                             |                        |
| Protocol                                                             | TCP/UDP/PPP/FTP/HTTP/NTP/PING/QMI/CMUX*/HTTPS*/SMTP*/MMS*/FTPS*/SMTPS*/SSL*/FILE*                                                                                           |                        |
| Modulation                                                           | UMTS: QPSK, 16-QAM, 64QAM<br>GSM: GMSK, 8-PSK                                                                                                                               |                        |
| Note: * Under Development                                            |                                                                                                                                                                             |                        |
| <sup>#</sup> Ideal temperature condition based on component's rating |                                                                                                                                                                             |                        |

For more information contact at <http://www.nebulae.io/> or [sales@nebulae.io](mailto:sales@nebulae.io)

System Level Solutions  
USA | India | UK

Tel.: 91-2692-232 501 / 502 / 001-408-852-0067 / 001-408-705-2339  
E-mail: [info@slscorp.com](mailto:info@slscorp.com) • Website: [www.slscorp.com](http://www.slscorp.com)