


NebuLink Node NLN 600d (NB-IOT)



Benefits

- LTE Cat M1/Cat NB1/EGPRS module with ultra-low power consumption
- A rich set of hardware peripherals such as USB, GPIO, ADC and UART
- Ready to go platform for cellular applications using Nebulae stack
- Supports various internet service protocols
- Worldwide LTE, UMTS/HSPA+ and GSM/GPRS/EDGE cover-age

Application Example

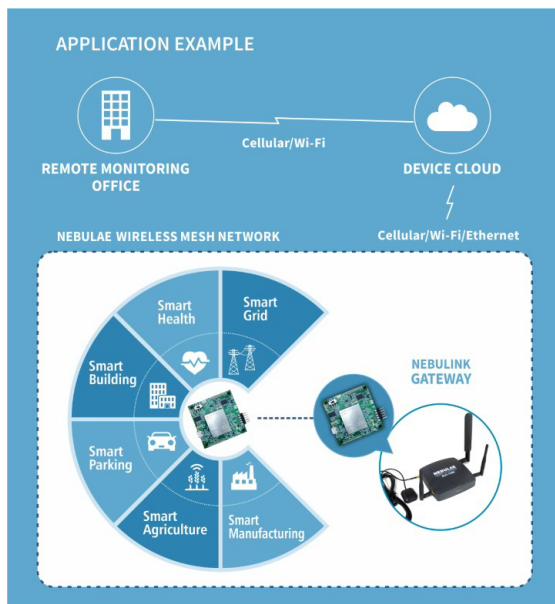

Specifications

Performance			
TX Power	23 to 33 dBm		
RX Sensitivity	-106.7dBm @Cat M1 -113 dbm @Cat NB1		
Features			
Processor	ARM® Cortex® A7		
Frequency	up to 1.2 GHz		
Memory	3 MB Flash, 3 MB RAM		
Frequency Band	FDD -LTE: B1/B2/B3/B4/B5/B8/B12/B13/ B18/B19/B20/B28 TDD-LTE: B39 EGPRS: 850/900/1800/1900Mhz GPS/Galileo/QZSS: 1575.42 ± 1.023 MHz GLONASS: 1597.5~1605.8 MHz, BeiDou: 1561.098 ± 2.046 MHz		
Serial Interface	3 x UART, 1 x PCM, 1 x I2C		
ADC	2 Channels 15 bit		
GPIO	2		
USB Interface	1 x USB 2.0 Device		
Data Rate		DL (Max)	UL (Max)
	Cat M1 Cat NB1 EDGE GPRS	375kbps 32kbps 296kbps 107kbps	375kbps 70Kbps 236Kbps 85.6Kbps
SIM Support	Standard Type Single SIM		
Mounting Type	1.27 mm Pitch SMD and Throughhole		
Antenna Options	U.FL Connector		
Size (LxWxH in mm)	32 x 29 x 2.4		
Electrical Specification			
Supply Voltage	3.3V~4.3V DC, 3.8V Typ, 2A		
Current Consumption	Cat NB1: 96 mA @ 0dBm, 110mA @10dBm, 223mA @23dBm		
Operating Temperature [#]	-40 °C to +85 °C		
Networking			
Protocol	PPP/TCP/UDP/SSL/TLS/FTP(S)/HTTP(S)/ NITZ/PING/MQTT		
GPS Channel	33 tracking channels, 99 acquisition chan- nels, 210 PRN channels GPS, GLONASS, BeiDou/Compass, Galileo, QZSS		
Modulation	GSM: GMSK, 8-PSK		
Carrier Approval	Vodafone (Global), Deutsche telekom (Europe), Verizon/ AT&T/T-mobile/Sprint (North America), Telis / Rogers /Bell (Can- ada), SKT/LGU+ (South Korea), NTT DOCOMO / SoftBank/KDDI (Japan), Telstra (Australia)		
Note: [#] Ideal temperature condition based on component's rating			

For more information contact at <http://www.nebulae.io/> or sales@nebulae.io

System Level Solutions
USA | India | UK

Tel.: 91-2692-232 501 / 502 / 001-408-852-0067 / 001-408-705-2339
E-mail: info@slscorp.com • Website: www.slscorp.com