

NebuLink Gateway NLG1213



Real Time



Secured




Remote
Monitoring



Scalable

Application Diagram

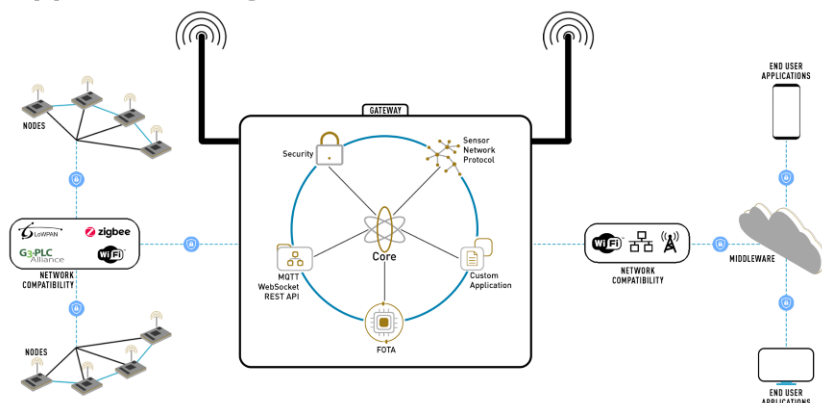

Introduction

NebuLink Gateway NLG1213 comes with a RF, G3-PLC and Wi-Fi interface, best fit for any commercial and industrial applications. It is pre-programmed with Nebulae IoT framework which gives flexibility to develop end applications with high security for networking, embedded control, sensing and easy manageability of device. The advance peripheral mechanism provides configuration and access control from a remote location using NebuLink Middleware services to integrate with third-party cloud infrastructure.

Application

- Ready to go platform for G3-PLC applications
- Real-time data acquisition, processing and transmission
- Remote management of devices and assets

Benefits

- Cost efficient for low and medium voltage power grids
- Communicates under noisy channel conditions, operates at -1 dB SNR
- Maximize productivity
- Remote management
- Reduce downtime
- Reduce operational cost
- Ensure safe operations
- Automize the system
- Manage assets
- Alert notification for faults and failures
- Third party cloud integration

Specifications

Processor	
Processor	Dual Core Xtensa® 32-Bit LX6
Frequency	240 MHz
Storage	
Memory	~300KB Internal RAM, 4 MB External PSRAM, 16 MB Flash, 32 KB EEPROM (for Configuration)
Software Stack	
Supported	NebuLink Gateway RTOS SDK Free RTOS SDK
Electrical Specification	
Power Supply	230VAC and 5V DC@3A
Operating Temperature	0 - 50 °C
Communication Interface	
RF	IEEE 802.15.4 with 6LoWPAN
PLC	IEEE 802.15.4 with G3-PLC
Wi-Fi	IEEE 802.11 b/g/n
Serial	3 x SPI, 4 x I2C
PowerLine Communication (PLC)	
Data Carriers	36 for CENELEC-A, 72 for FCC
TX Power	32 dB
PLC Frequency Bands	CELNELEC-A and FCC
PLC Modulation	OFDM (ROBO, DBPSK, DQPSK, D8PSK)
PLC Coupling	1 Phase to Neutral
PLC Protocol	G3-PLC
Encryption	128 bit
General	
Multifunctional IO	Up to 24
Reset	Yes
WPS Switch	Yes
LEDs	7 x Status LED, 1 x User LED
Mechanical	
Size (L x W x H) in mm	211.52 x 154.39 x 35.78
Weight	500 gm
Casing	Acrylic based
Accessory	
Antenna	2 x RP-SMA Whip-Tilt
Programmer	USB Programmer with USB Cable

For more information contact at <https://www.nebulae.io/> or sales@nebulae.io

System Level Solutions
USA | India | UK

Tel.: 91-2692-232 501 / 502 / 001-408-852-0067 / 001-408-705-2339
E-mail: info@slscorp.com • Website: www.slscorp.com