


NLN0721

The NLN0721 is an ideal sub-GHz solution for "Internet of Things" applications such as smart metering, smart lighting, building automation, and smart homes. This sub-GHz module based on EFR32FG28 offers long-range and mesh connectivity for multi-hop connections. This single-die, multi-core solution provides industry-leading security features, low power consumption with fast wake-up times, and integrated power amplifiers to enable the next level of secure connectivity for IoT devices. The compact size of the module makes it an ideal choice for any IoT device. With a lifespan and support of 10 years, this module is the most appropriate choice for your IoT end devices.

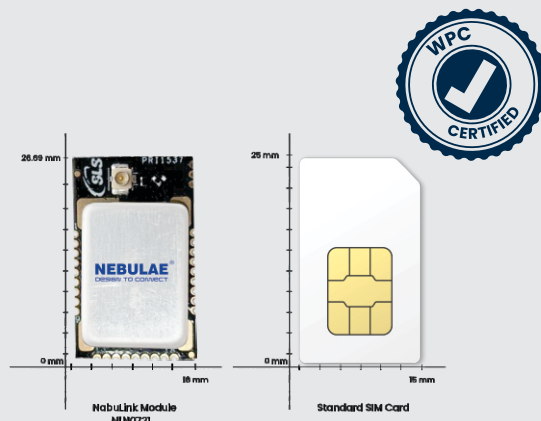

Specifications

Performance

TX Power		+20dBm	
RX Sensitivity	IN865MHz	100 kbps,no FEC,PER<10%	-108 dBm
	IN865MHz	50 kbps,no FEC,PER<10%	-109.5 dBm
	Eu863-870 Mhz	50 kbps,no FEC,PER<10%	-109.5 dBm
Tolerance		± 2 dBm variation in test results	
RF Range (Line of Sight)		1 Km	
RF Data Rate		50kbps,100kbps	

Processor Specifications

Processor	32-bit 78 MHz ARM Cortex® -M33 with DSP instruction and floating-point unit for efficient signal processing
Memory	Up to 1024KB flash, 256KB SRAM
Frequency Band	EU 863-870,US 902-928,IN865
Mounting Type	1.27 mm Pitch SMD
Antenna Option	u.FL, Feedline
Size (LxWxH in mm)	26.68×16.0×3.6

IO Specifications

Serial Interface	1 x U(S)ART 1 x LPUART
Analog Input	2 x 12-bit ADC 2.5 Msps
Digital IO	Up to 21 pins

Electrical Specifications

Supply Voltage(VDD)	1.8V-3.6V, 3.3V
Current Consumption (Standby Mode)	6.95mA
TX Mode	98.5mA
RX Mode	6.21mA
Operating Temperature	-30° C to 85° C

Networking

Protocol	Amazon Side-walk, WM-BUS, Wi-SUN
----------	----------------------------------

Applications




Smart
Metering



Smart
Agriculture



Industrial
Automation



M2M &
IoT

Key Product Features

- Frequency Band: EU 863-870, US 902-928, IN865
- TX power: Up to +20 dBm
- Protocol Support: Amazon Side-walk, WM-BUS, Wi-SUN
- Power Supply: 1.8V to 3.6V
- Operating Temperature Range: -20°C to +75°C
- Flash Program Memory: Up to 1024 kB
- RAM Data Memory: Up to 256 kB
- Hardware Cryptographic Acceleration: AES128/192/256
- Over-the-air: Firmware update over-the-air (FUOTA)
- Sensitivity: -108 dBm @100kbps on 865-867 MHz, Wi-SUN FSK
- Serial-wire debugging (SWD)
- I/Os: Up to 21 I/Os
- Directly soldered to any device board
- RF shield to protect from external electromagnetic radiation and interference

Contact us

System Level Solutions

☎ 91-2692-232 501
 🌐 www.nebulae.io
 ✉ sales@nebulae.io

System Level Solutions proudly partners with

