

Zigbee MG21 Module NLN111P


NEBULAE[®]
DESIGN TO CONNECT

Ideal for enabling Energy-friendly Multiprotocol, Multiband networking for IoT devices.

NLN111P is a compact-size, high-performance Zigbee Module based on the Silicon Labs **EFR32MG21** SoC. It features an integrated PCB antenna for excellent RF performance in dense environments. With Ultra-Low Power Consumption, it is ideal for both battery-powered and always-on IoT devices.

Key Features

- **Processor:** Silicon Labs EFR32MG21 SoC
 - CPU: 80 MHz ARM Cortex-M33
 - Memory: 1024 kB Flash, 96 kB RAM
 - Frequency Bands: 2.4GHz ISM
 - Performance: TX Power up to +20 dBm
 - RF Sensitivity: -104.3 dBm @ 250 kbps
 - Security: Crypto, AES-128/192/256 (HW Accelerated)
- **Firmware:** OTA updates, Secure Boot
- **Network Protocols:** Bluetooth 5, Zigbee, Thread
- **Power & Current:** Supply: 3.3V, Standby: 60 μ A, TX: 185 mA, RX: 9.5 mA
- **Physical:**
 - Size: 26.7 × 16 × 3.6 mm
 - I/O: Serial, Analog, Digital (21 pins)
 - Mount: 1.27mm Pitch SMD
 - Shielding: EMI RF shield
- **Environment:**
 - Temp Range: -20°C to +85°C

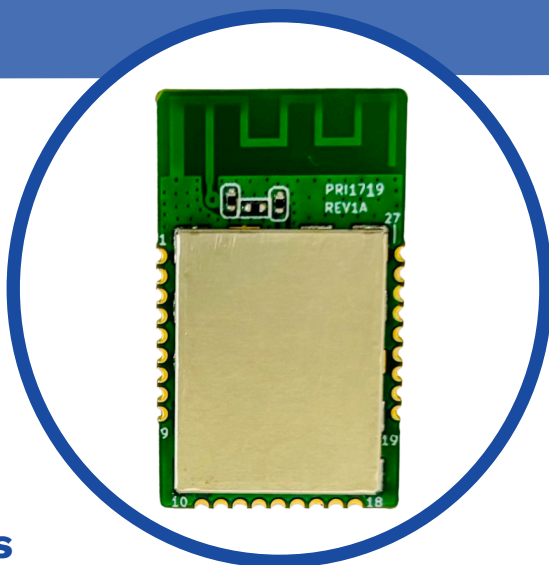

Benefits

- Longer battery life for IoT device
- Robust RF Performance
- Delivers significant processing capability for complex IoT applications.
- Provides secure boot loading, faster encryption, debug access control, and a true random number generator
- Strong RF Range
- Versatile connectivity for a range of IoT devices
- OTA Updates

Applications

- IoT Multi-Protocol Devices
- Smart Cities, Smart Factory
- Smart lights, Smart Metering
- Building Automation and security
- Gateways and Digital Assistants



UK

20 Mortlake,
20 Mortlake High Street,
London, SW14 8JN



INDIA

32, D4, PHASE I
GIDC Estate, V.U. Nagar
Gujarat - 388 121



USA

511 N. Washington Avenue
Marshall, Texas 75670.