

SMART ELECTRICITY METERING

There is a smarter
way to use Energy!

About SLS



We are a
Product & Service Company

Into
Hardware and Software

Established as a
Turnkey Solution Provider

100 +

Active projects
across the globe

300 +

In-house
staff

21 +

Years and
counting

- Operating Basis: India, UK, USA
- No. Of Business Verticals: 7 +
- No. Of Manufacturing Plants: 2
- In-House Design & Manufacturing capability
- Part of Make-in-India Initiative

OUR OFFERINGS


Hardware Offerings

1. Wi-SUN Protocol
 - Module
 - NIC
 - DCU

Software Offerings

1. Network Management Server (NMS)
2. Head End System (HES)
3. Mobile App – Energy+

Energy AMI Architecture

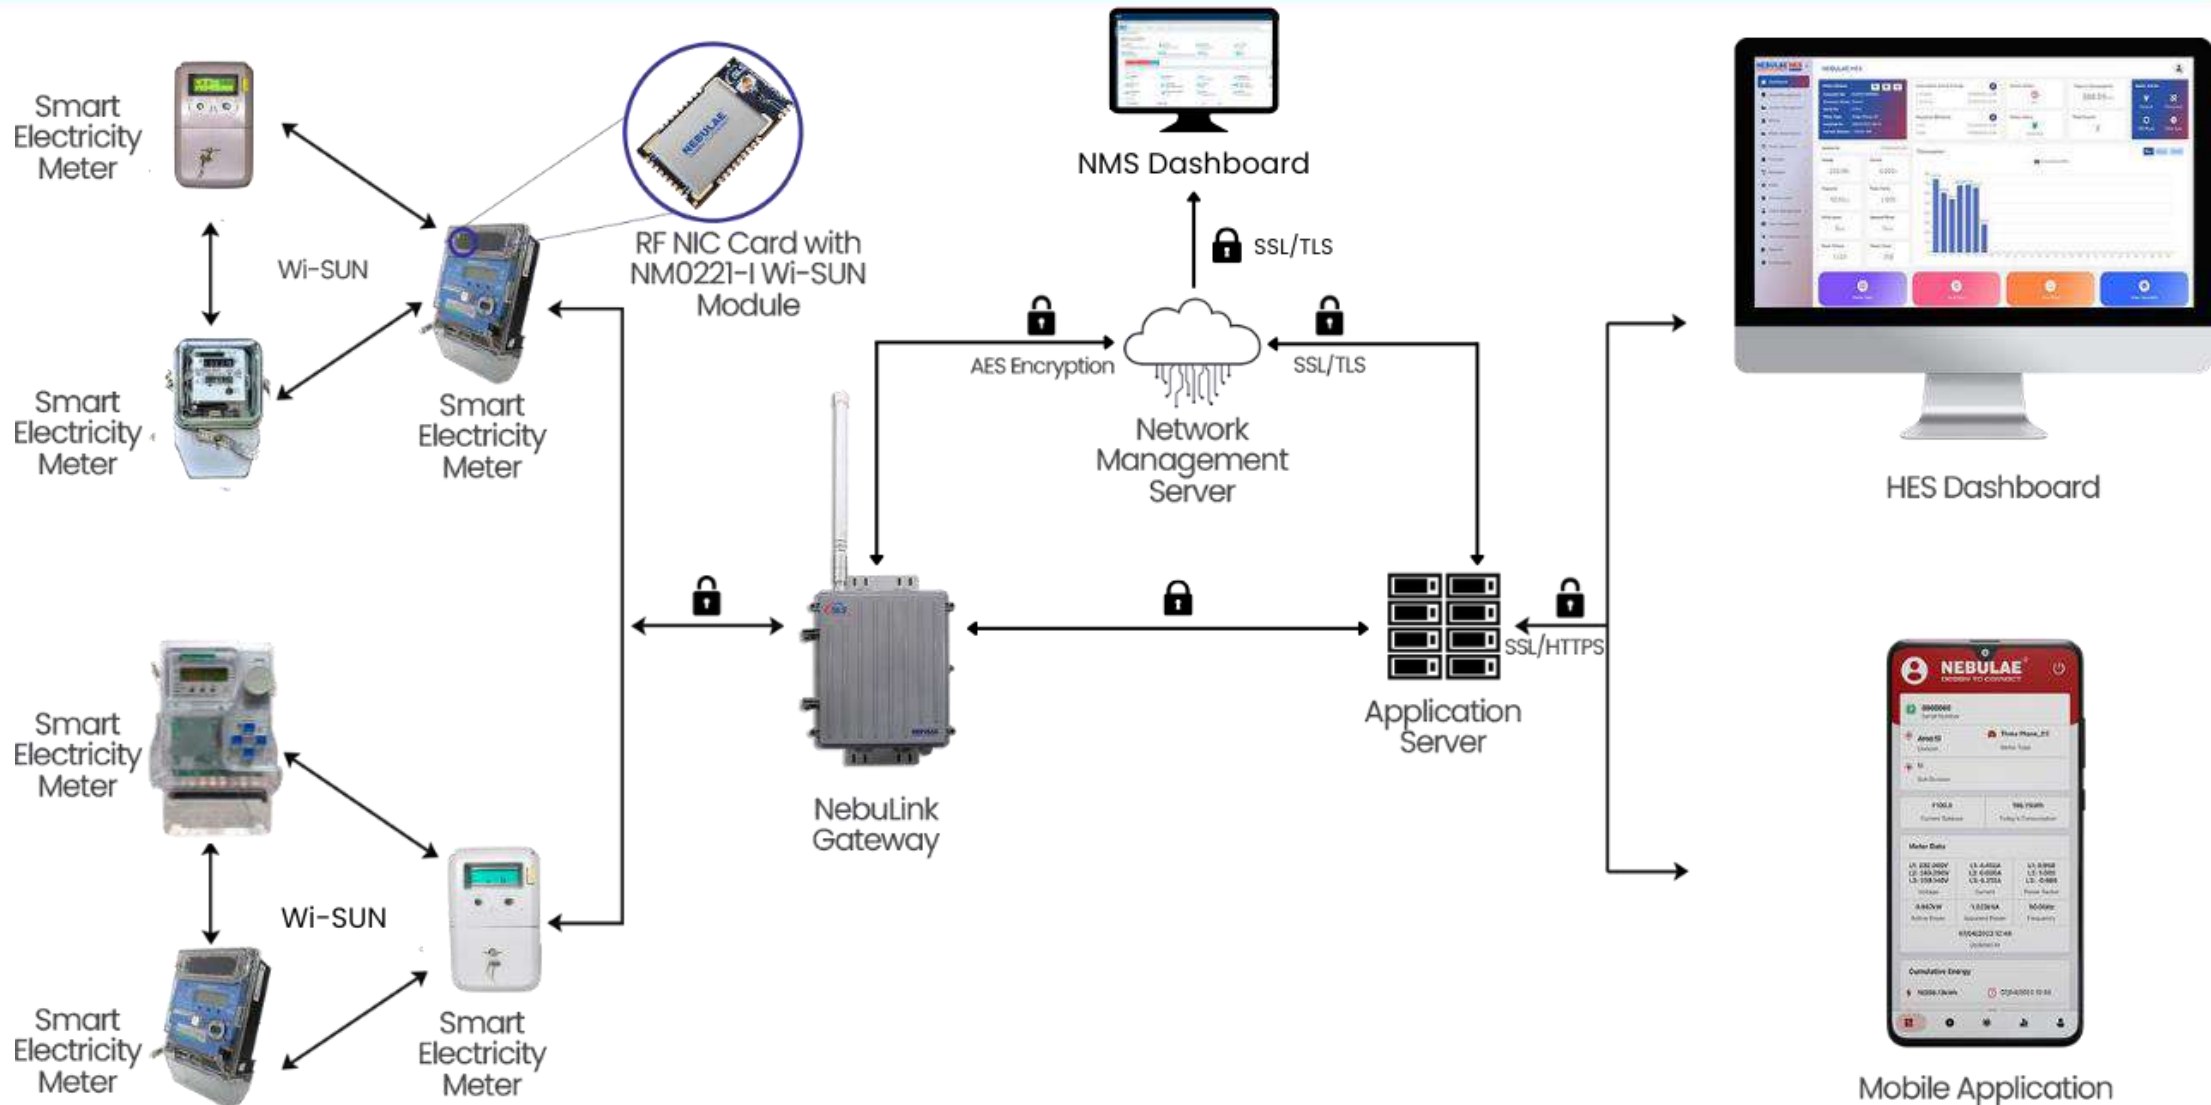


Wi-SUN Module

NM0221-I is a SOC-based low-power wireless module by Nebulae that provides long-range connectivity for IoT devices. NM0221-I is ideal for applications which need self-forming and self-healing mesh networks. The module is ideal for IS16444 smart metering applications because it is equipped with sufficient memory and is WPC certified. NM0221-I's FOTA capability makes it suitable for remote security updates.

FEATURES

- Frequency band: 863 MHz to 876 MHz
- Supports 2/4 (G)FSK with fully configurable shaping, OQPSK DSSS, (G)MSK, OOK TX modulation formats
- 32-bit real time counter and calendar
- 2 × Watchdog timer with dedicated RC oscillator
- IEEE 802.15.4 compliant
- Up to 1024 kB Flash program memory & 256 kB RAM data memory.
- Provides an OTA (Over the Air) firmware update mechanism
- Comes with U.FL connector to support external antenna and feedline connection for PCB antenna

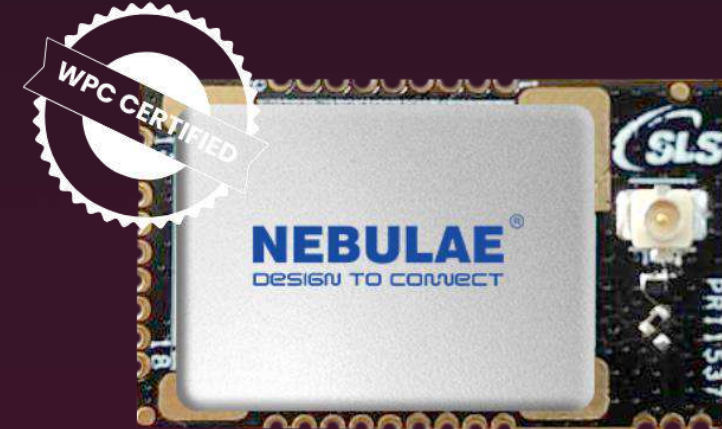

Wi-SUN High Power Module

NLN0725-IS is our High Power Wi-SUN Module Delivering long-range, secure, and energy-efficient wireless communication, our High Power Wi-SUN module is designed for robust, large-scale IoT networks. With extended transmission range, strong penetration, and mesh networking support, it enables reliable connectivity for smart metering, street lighting, industrial automation, and other mission-critical applications. Built for harsh environments, it ensures stable performance, low power consumption, and seamless interoperability with global Wi-SUN standards.

FEATURES

- Frequency band: 863 MHz to 876 MHz
- Supports 2/4 (G)FSK with fully configurable shaping, OQPSK DSSS, (G)MSK, OOK TX modulation formats
- 32-bit real time counter and calendar
- 2 × Watchdog timer with dedicated RC oscillator
- IEEE 802.15.4 compliant
- Up to 1024 kB Flash program memory & 256 kB RAM data memory
- Provides an OTA (Over the Air) firmware update mechanism .
- Comes with U.FL connector to support external antenna and feedline connection for PCB antenna
- TX power: Up to +27/30 dBm



Wi-SUN DCU

The NLG8520 by Nebulae is a cutting-edge Wi-SUN gateway that provides secured interconnection of Wi-SUN field devices with WAN communication networks. Its capabilities include Wi-SUN FAN Support, remote device management, communication management, data storage, and interface abstraction. Ideal for small to medium mesh networks supporting up to 250 nodes on a single network for various IoT applications.

FEATURES

- Open-source embedded Linux system
- 250 Nodes connected in one DCU
- Long range wireless data transmission
- External fiber glass antenna with 5 dBi gain for long range
- Backhaul connectivity with LTE and Ethernet
- Supports up to 6 hours battery backup
- Wide Input Supply Range – No need for extra over-voltage protection
- 10kV surge protection.
- IP65, Fire retardant rated case
- Tempered protection





SOFTWARE OFFERING



Network Management System (NMS)




RF Level Network Graph Overview

Head End System (HES)


HES for Smart Metering is our scalable Head End Data acquisition solution for Advanced Metering Infrastructure (AMI). The IoT-based solution monitors & controls smart meters operating as a communication driver between MDM Systems and measurement devices. The HES collects system-wide telemetry data & enables integration with smart energy devices with seamless interoperability, enhancing business intelligence, operational efficiency and system-wide remote device management.

FEATURES

- Centralized interface for managing all meter data with friendly intuitive dashboards both internal users and end consumers.
- Compatibility with meters supporting IS 16444 standards
- Multi-communication interface support, including GPRS and RF
- Real-time insights into energy data collection
- Efficient monitoring and energy management
- Comprehensive Prepaid/Postpaid billing support, including Net Metering and Gross Metering
- Dual-source consumption history (Grid & DG)
- Seamless integration with MDMS and other third-party utility systems

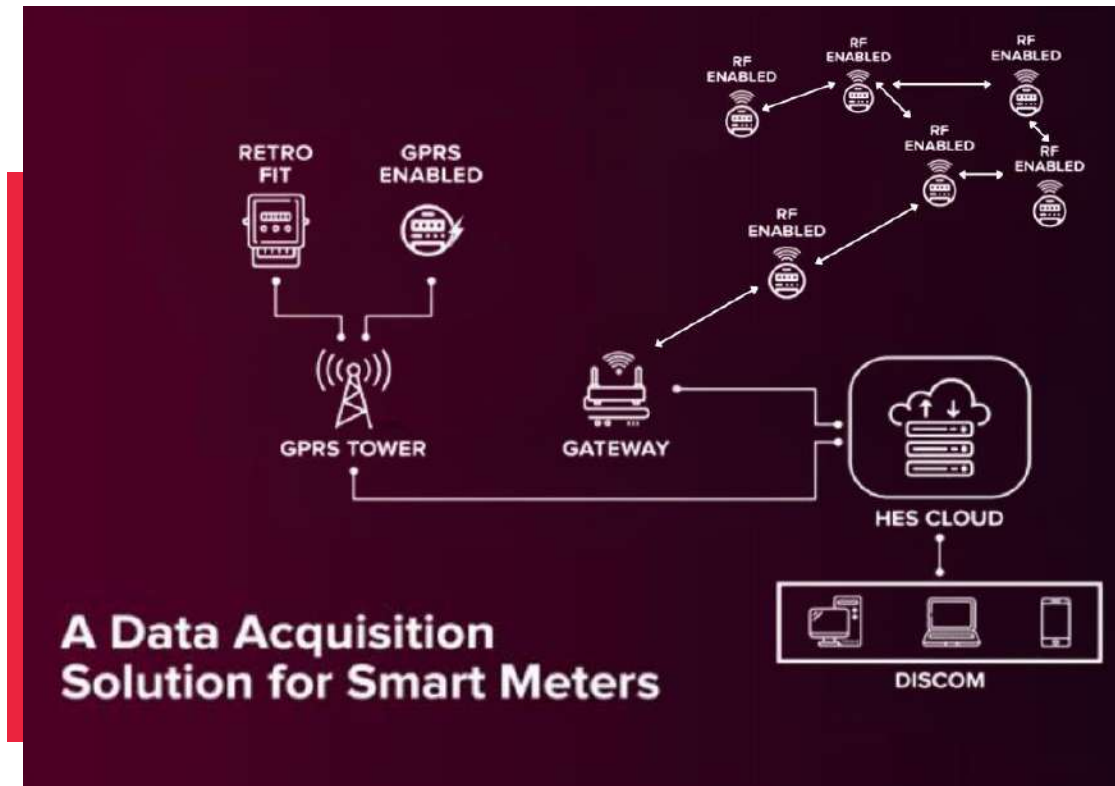

Head End System (HES)

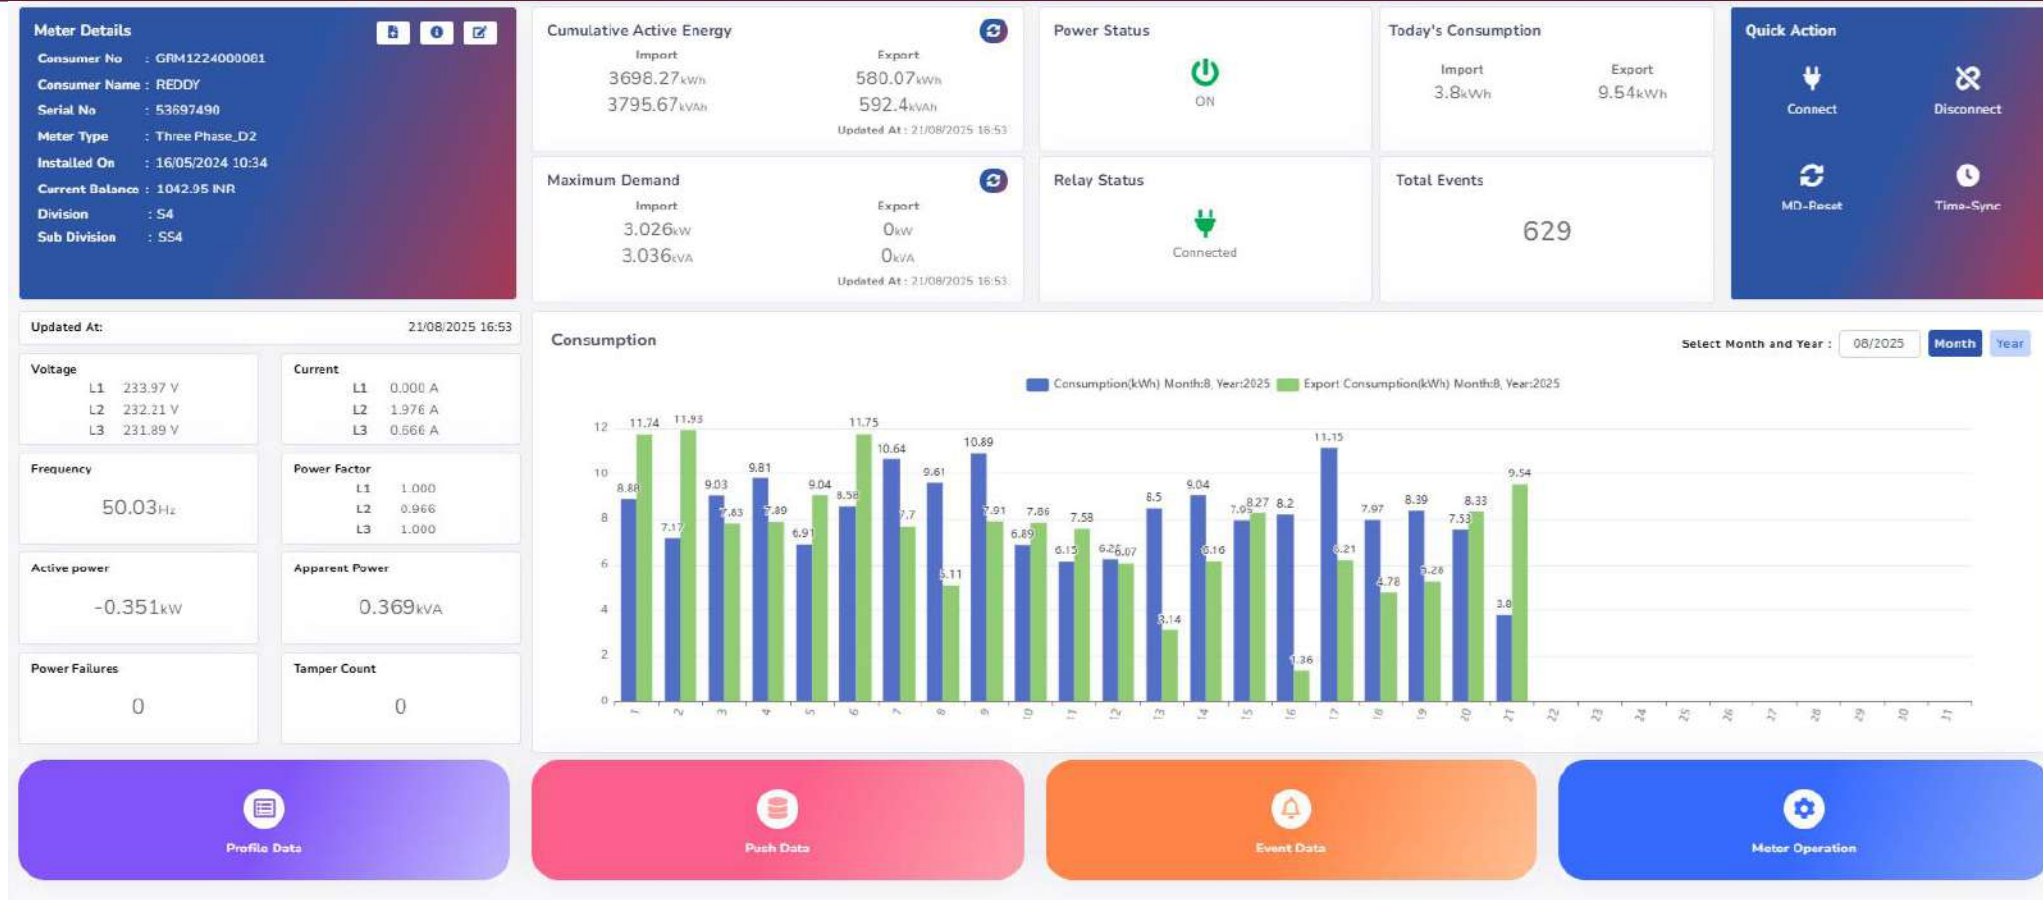

HES Dashboard Overview


Total Energy Managed: 1+ Lakh MW

Total Recharges Handled: 10+ Crore


Total Meters: 20,000+

Mobile Application – Energy+

Energy+ App Overview

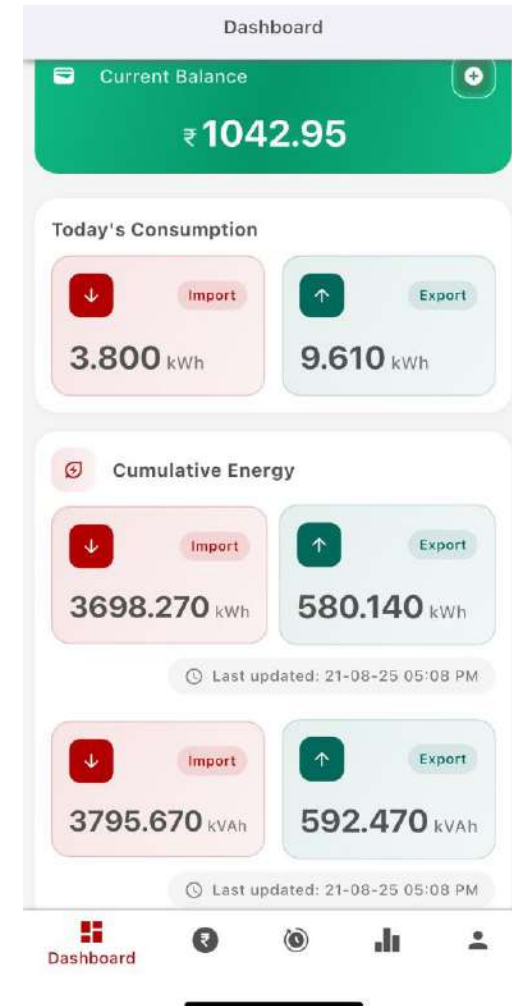


Use Cases

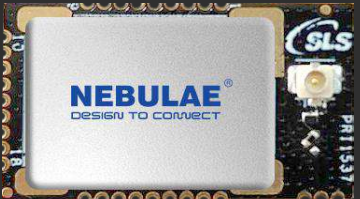

Module



Wi-Sun High Power Module

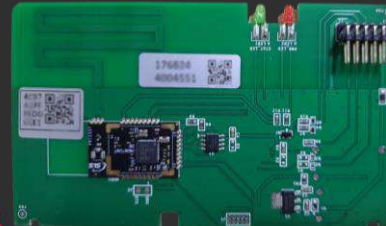

RF NIC Card



DCU

THANK YOU



India Office

32, D4, Phase 1, GIDC Estate
V.U. Nagar - 388 121, Gujarat, India



UK Office

20 Mortlake, 20 Mortlake High
Street, London, SW148JN



USA Office

511 N. Washington Avenue,
Marshall, Texas - 75670

✉ info@slscorp.com

☎ +91-2692-232 501

🌐 www.slscorp.com