

SMART WATER METER

Nebulae Pravah 15



SMART WATER METER

Our LoRa-based Smart Water Meter enables utilities and municipalities to transform traditional water metering into a connected, intelligent, and data-driven system. Designed for modern smart city infrastructure, it delivers accurate, real-time consumption data without the need for manual meter reading. Powered by low-power, long-range LoRa communication, the meter ensures reliable data transmission across wide urban and rural areas while operating for years on a single battery. This significantly reduces maintenance effort, field visits, and total operational costs.



Key Highlights:

- Long-range, low-power LoRa connectivity for scalable deployments
- Automatic, accurate meter reading—no manual intervention
- Real-time water usage monitoring via centralized platform
- Secure wireless data transfer to servers, dashboards & apps
- Abnormal usage & tampering detection for higher reliability
- Operational status monitoring with battery alerts
- Seamless integration with HES for efficient data management
- Enables transparent billing, optimized maintenance & sustainability

FEATURES & APPLICATIONS

Features:



ISO 4064



Leakage Alerts



High Measurement Accuracy



Optimized Power Management



Rugged and Weather-Resistant



Server Based



Remote Monitoring





Encrypted Data Transmission

Applications:

-  Residential Apartments
-  Smart City Projects
-  Municipal Water Supply
-  Industrial Facilities
-  Commercial Complexes


ECOSYSTEM

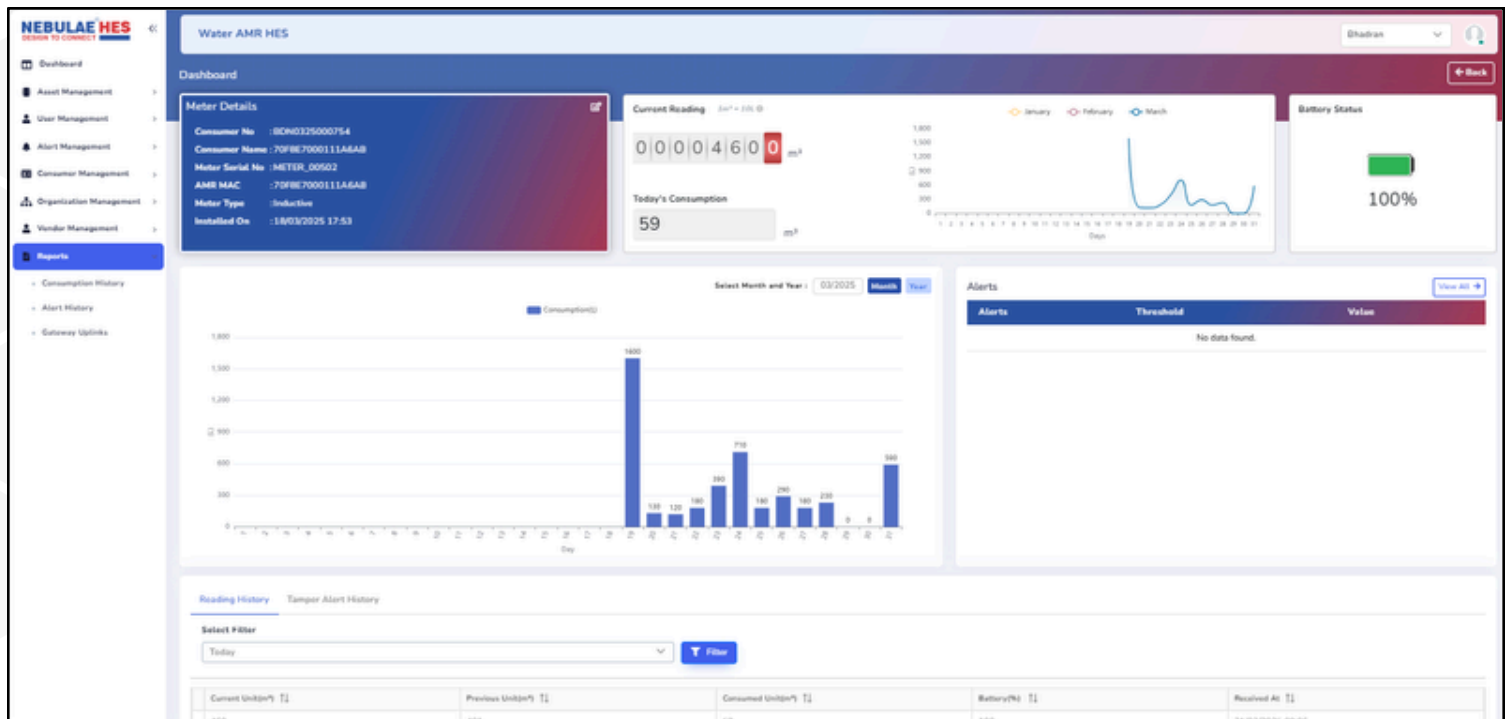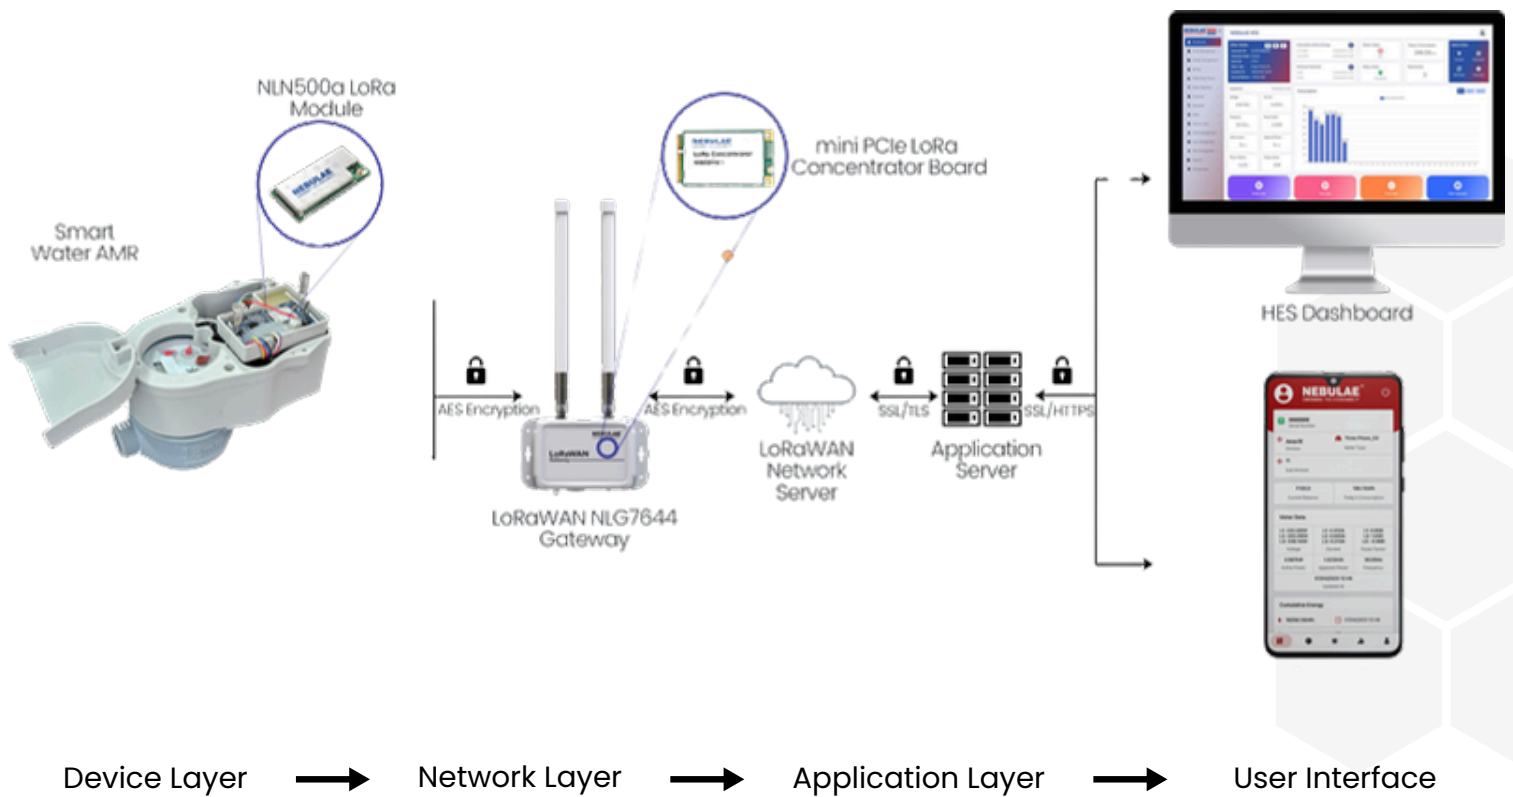

Head End System (HES) Dashboard

Product Name	Nebulae Pravah 15 (Ordering Code: SLS1612)	
Mechanical Specifications		
Nominal Diameter (DN)	15mm	20mm
Maximum Working Pressure	1.0MPa	
Loss of Pressure Rating	△p63	
Flow Performance Parameters		
Common Flow(Q3) (m³/h)	2.5	4
Boundary Flow(Q2) (m³/h)	0.04	0.064
Minimum Flow(Q1) (m³/h)	0.025	0.04
Overload Flow(Q4) (m³/h)	3.125	5
Accuracy and Measurement Characteristics		
Margin of Error	Q1<=Q<=Q2 error <=+-5%; Q2<=Q<=Q4 error <=+-2%	
Class of Accuracy	Level 2	
Flow Profile Sensitivity Level	U10, D5	
Least Count	0.0001m³	
Smallest Unit of Meter Reading Data	0.01m³	
Full Scale Reading	99999.9999m³	
Electrical Specifications		
Working Power Supply	3.6V Disposable Lithium Battery Pack	
Communication		
Communication Mode	NB-IoT	
Environmental Specifications		
Working Temperature	0.1℃~30℃	
Environmental Temperature Range	-25℃~70℃	
Climate and Mechanical Environment Safety Level	B	
Compliance & Protection Ratings		
Electromagnetic Compatibility Rating	E1	

DIMENSIONS

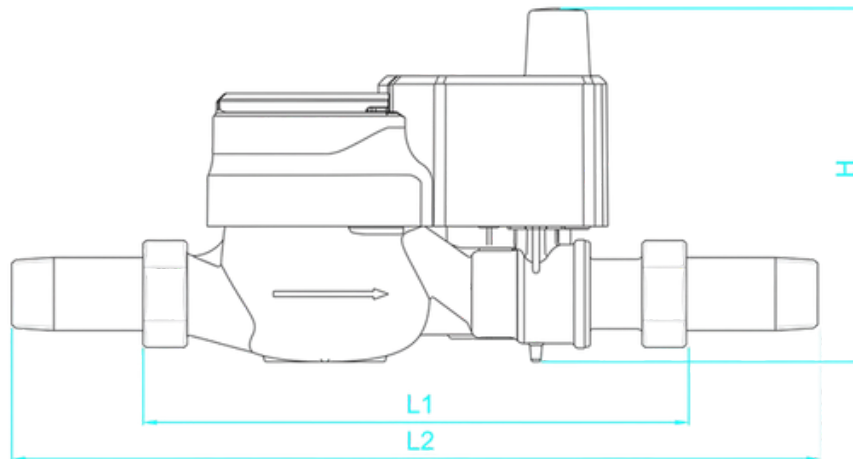

Bore	L1 (mm)	L2 (mm)	L3 (mm)	H (mm)	W (mm)	D
DN15	165	255	14	130	104	R 1/2
DN20	195	295	16	130	104	R 3/4

Why Choose Us?

Nebulae is a division of System Level Solutions (SLS) that focuses on simplifying the implementation of IoT solutions. It is a full-stack Internet of Things integration platform that drives a digital transformation and enables IoT developers to develop their solution for delivering the business logic.

Contact Us



+91 2692-232501
+91 98980 42339



Plot#32, Zone-D/4, Phase-1
GIDC Estate, V.U. Nagar - 388 121
Gujarat, India



www.nebulae.io



info@slscorp.com