


Wi-SUN High Power Module

NLN0725-IS is our High Power Wi-SUN Module delivering long-range, secure, and energy-efficient wireless communication, our High Power Wi-SUN module is designed for robust, large-scale IoT networks. With extended transmission range, strong penetration, and mesh networking support, it enables reliable connectivity for smart metering, street lighting, industrial automation, and other mission-critical applications. Built for harsh environments, it ensures stable performance, low power consumption, and seamless interoperability with global Wi-SUN standards.

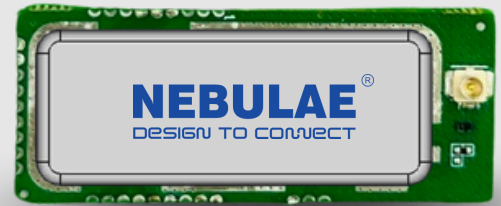

Specifications

Performance		
TX Power		+27 dBm (Remarks: we have support to get maximum power up to +30 dBm but as per WPC criteria, we can't go beyond +27 dBm)
RX Sensitivity	IN865 MHz	-107 dBm @100kbps with PER <10%
RF Data Rate		50kbps, 100kbps
Processor Specifications		
Processor		32-bit 78 MHz ARM Cortex® -M33 with DSP instruction and floating-point unit for efficient signal processing
Memory		Up to 1024KB flash, 256KB SRAM
Frequency Band		EU 863-870, US 902-928, IN865
Mounting Type		1.27 mm Pitch SMD
Antenna Option		u.FL, Feedline
Size (LxHxW in mm)		39.50x16x3.6
IO Specifications		
Serial Interface		1 x U(S)ART 1 x LPUART
Analog Input		2 x 12-bit ADC 2.5 Msps
Digital IO		Up to 21 pins
Electrical Specifications		
Power Supply	FG28 supply	1.8V~3.6V, 3.3V
	PALNA Supply	3.3V (+27dBm) , 5V (+30dBm)
Current Consumptions		
Stand by mode		18.4mA
TX Mode		360mA
RX Mode		30mA
Operating Temperature		-30° C to +85° C
Networking		
Protocol		Amazon Side-walk, WM-BUS, Wi-SUN

Applications



Smart
Metering



Smart
Cities



Smart
Factory



Data Centre/
Server Room

Key Product Features

- Frequency band: 863 MHz to 876 MHz
- Supports 2/4 (G)FSK with fully configurable shaping, OQPSK DSSS, (G)MSK, OOK TX modulation formats
- 32-bit real time counter and calendar
- 2 × Watchdog timer with dedicated RC oscillator
- IEEE 802.15.4 compliant
- Up to 1024 kB Flash program memory & 256 kB RAM data memory
- Provides an OTA (Over the Air) firmware update mechanism
- Comes with U.FL connector to support external antenna and feedline connection for PCB antenna
- TX power: Up to +27/30 dBm

Contact us

System Level Solutions Pvt. Ltd.

☎ 91-2692-232 501

🌐 www.nebulae.io

✉ sales@nebulae.io

📍 32, D4, Phase I, GIDC Estate, V.U. Nagar -388121
Gujarat, India