


HANDHELD LoRaWAN GATEWAY

NLG8140

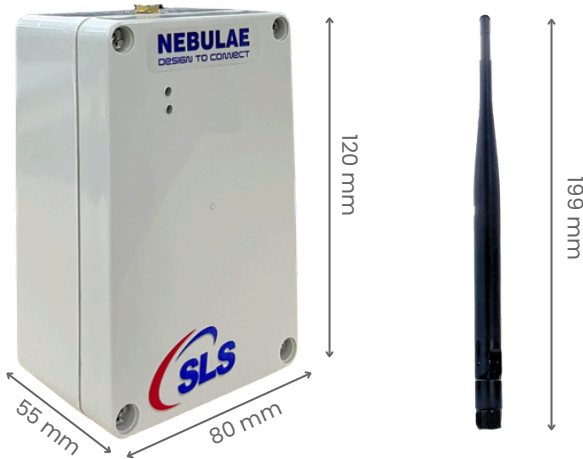

The Handheld LoRaWAN Gateway is a high-performance portable concentrator designed for precision field testing and industrial IoT deployment. Built with the SX1303 baseband and high-power SKY66420 front-end, it offers superior sensitivity.

Applications

- Field Testing
- Industrial IoT
- Agriculture & Environmental Monitoring
- Smart Agriculture
- Asset Tracking

Key Product Features

- Extreme +27 dBm TX Power
- SX1303 Next-Gen Baseband
- RPi Powered Edge Computing
- Integerated LNA

Processor Specifications	
Processor	Raspberry Pi 4
Architecture	64-bit Quad-core ARM
Frequency Band	IN865
Memory	Up to 1GB LPDDR4
RF & Connectivity	
LoRa IC	Semtech SX 1303
Radio IC	Dual SX 1250
Front-End Module	SKY66420
Backhaul	Wi-Fi
Performance	
TX Power	+27 dBm (high Power)
Sensitivity	-139 dBm @ SF12
RF Range (LoS)	Up to 1km+
Channels	8-Channel Multi-packet
Certifications	
• WPC	

For more information contact at <https://www.nebulae.io> or sales@nebulae.io