

DC Charger Controller

Controllers are used to make EV Charger in the range of 30 kW to 480 kW. It is innovative communication center for Electric Vehicle Supply Equipment (EVSE).

Safety


- Equipped with insulation monitoring devices to ensure safe charging operations.

Connector

- Dual CCS2 Interface Gun

Charging Capacity

- 30 kW to 480 kW

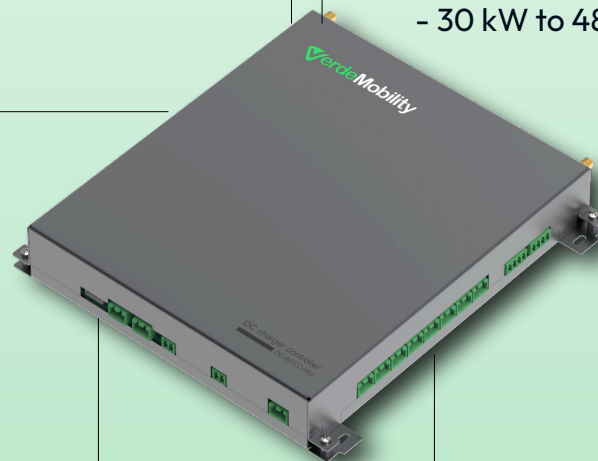

With Enclosure

Additional Features

- RFID
- OTP authentication
- UPI payment
- LED status

Smart Configuration

- HMI and Mobile Application

Electrical Properties

Input Supply	12 V DC @ 2 A
Power	24 W
Battery Backup	12 V rechargeable battery supported with charging

Interfaces

Network Connection	Ethernet, Wi-Fi 802.11 b/g/n and GSM (LTE, 4G Fallback to 2G), BLE
Vehicle Communication	Basic Signaling (BS) and High-Level Signaling (HLC)
Power Module Interface	Controller area network (CAN)
HMI Communication Protocol	TTL or RS-232
AC and DC Energy Meter Communication	RS-485
Any Sensor Interface	I2C or Digital Input
Gun Temperature Measurement Input	4 Nos. RTD, PT1000 to Monitor Gun Temperature & Prevent Gun overheating
LED	1 No. LED Connector supporting 3 different Neo Pixel LED blocks to Display individual Gun status and Charger Status
Insulation Monitoring Device	RS-485
Load Balancing	Configurable Dynamic load balancing (based on EV power demand)
Digital Payment Support	On-Screen QR Code-Based UPI Support, POS Machine Integration
Standard Support	DIN 70121, ISO 15118-2, ISO 15118-20 Plug & Charge (PnC), Vehicle to grid (V2G), IEC 61851

Other Features

Storage	MicroSD Card Support; Storage Expandable up to 32 GB
Firmware Upgrade	Firmware Over-the-Air (FOTA) Support Available

Environment

Operating Temperature	-20°C to +70°C
Humidity	5 to 95%