



Verycon 2.0

AC EV Charger Controller

Features

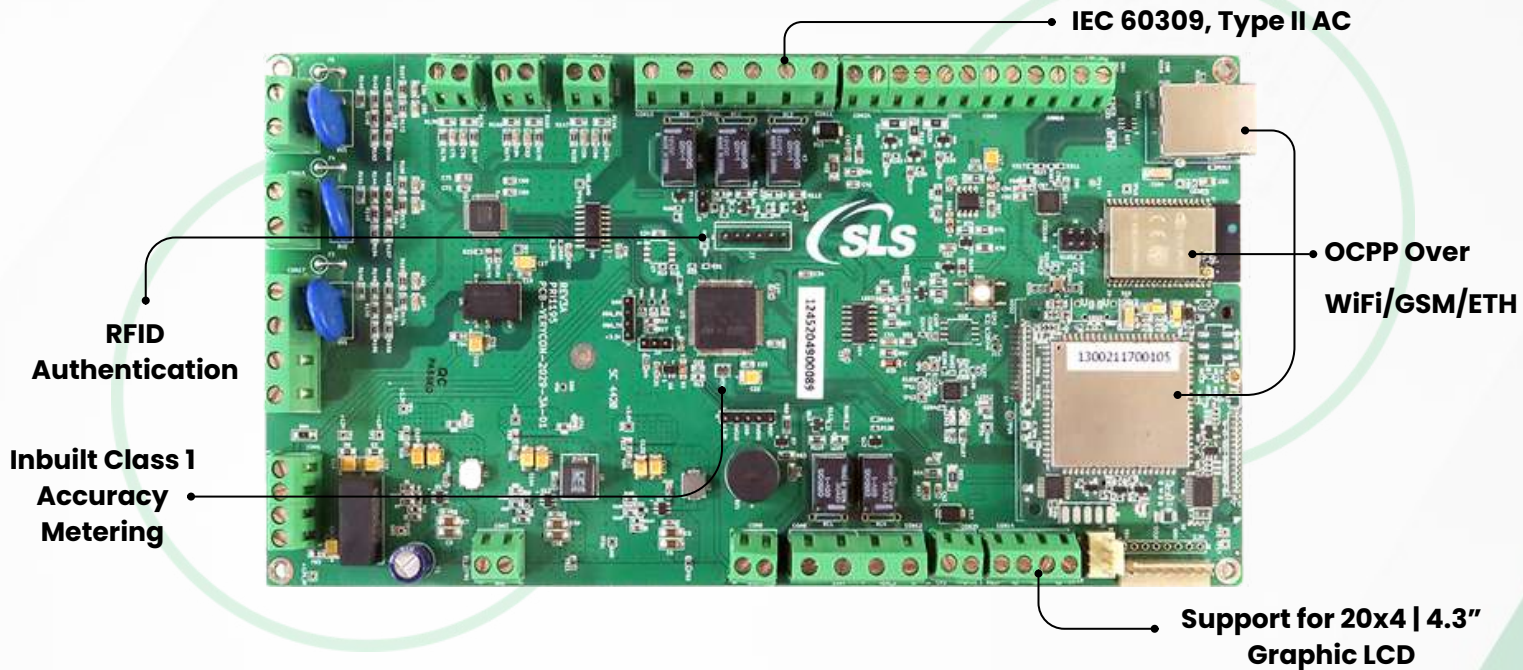

AC Charger Output Configuration

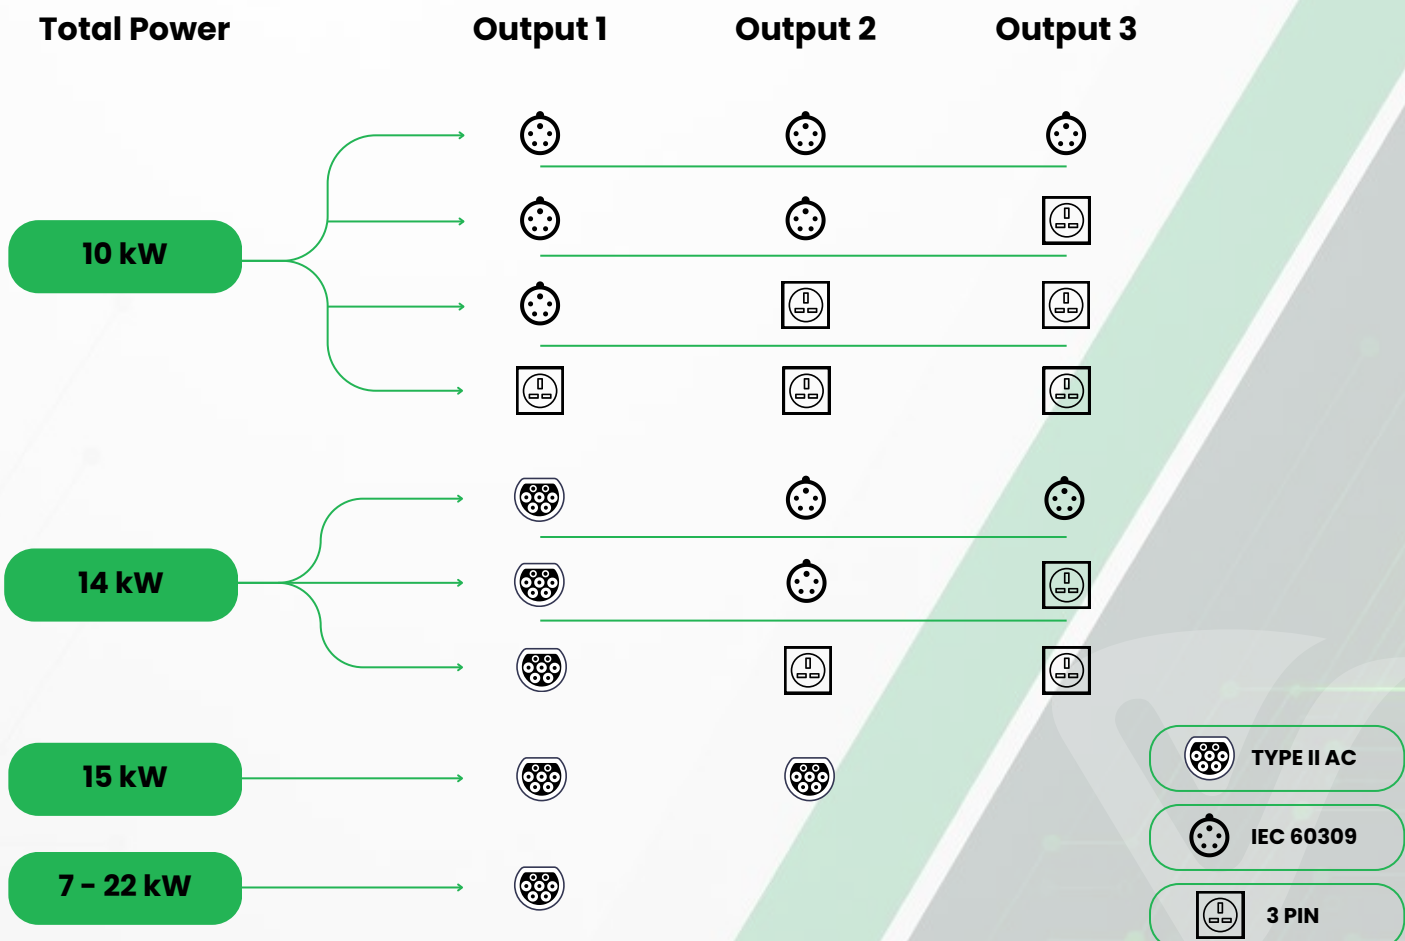

Technical Specifications

Input Supply

Operating DC power Upto 12 V, 2A

Output Power / Supply

No. of Outputs	• 3
Compatible Connector/ Socket Type	• Type 2, IEC 60309, 16 A Socket
Relay Output	• x2 Relay output for AC Supply control to vehicle • x2 Relay output for external solenoid lock controlling • x2 Relay output for ventilation control as per IEC 61851
Current Output	• Up to 32A, Single Phase • Up to 80A, Three Phase

User Interface and Control

Display	4.3" Graphics Display via I2C, 20 x 4 Character LCD via I2C
Emergency Stop	Supported
Visual Indication	RGB LEDs
RFID	Supported via SPI

Electrical Parameter

Energy Meter	Inbuilt Class 1 m (Three Phase Meter)
Battery Backup	Supported
CP/PP interface	• x2 Control Pilot Support • x2 Proximity Pilot Support

Communication

Communication	Ethernet, Wi-Fi, GSM
Protocol	OCPP 1.6J, Upgradable to 2.1 through FOTA
Charge Controller Standard	IEC61851-22 (Mode 33)

Mechanical

Product Dimension (L*B*H)	225 mm * 120 mm * 21 mm
---------------------------	-------------------------