



## (a) Physical replay and exact-comparison data paths

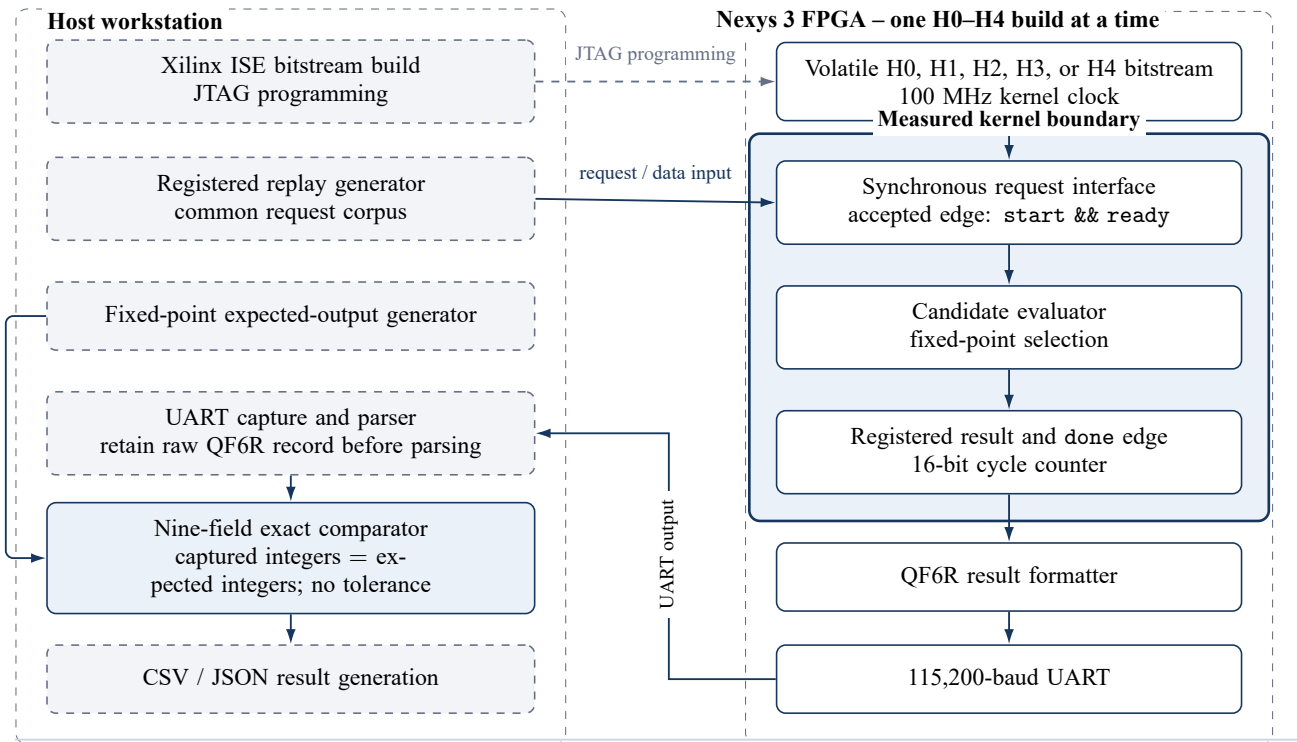

## (b) Physical board and evidence boundary

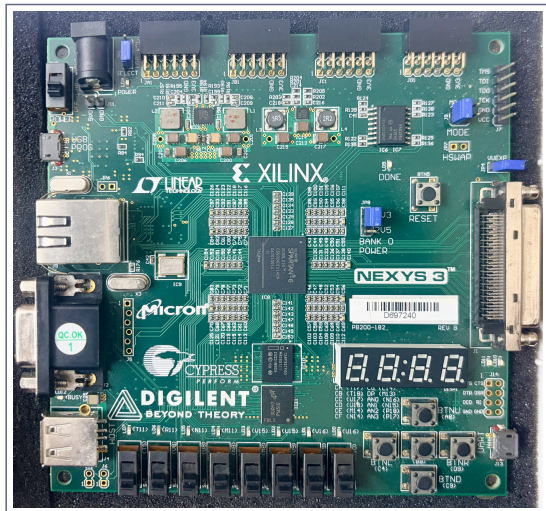

Actual Nexys 3 Rev. B board used for every H0-H4 replay (uncropped photograph).

### Included in reported kernel latency

Accepted request edge → candidate evaluation → done edge, measured by the FPGA cycle counter.

### Excluded from reported kernel latency

JTAG programming, UART serialization, host processing, parsing, candidate generation, KMS/SDN access, and route installation.

### Physical evidence scale

84 records per configuration; five independent configurations; 420 physical records; nine fields per record; 3,780 exact comparisons.