

Comments

LMK05318B EVM Jitter Measurement OUT0 100 MHz

Setup Configuration

Scope Details			
Scope Model Number	Scope Serial Number	TekScope Version	Scope Calibration Status
MSO64B	C069984	2.0.3	Pass

Waveform Histogram Results


No Waveform Histogram Results Available

Measurement Results

Name	Measurement	Src(s)	Mean'	Min'	Max'	Pk-Pk'	Std Dev'	Population'	Accum Mean	Accum Min	Accum Max	Accum Pk-Pk	Accum Std Dev	Accum Pop
Meas 1	JS: TIE(σ)	Ch 1	-5.8827 fs	-5.6754 ps	5.6100 ps	11.285 ps	1.2739 ps	1000001	-687.67 as	-7.1747 ps	6.8110 ps	13.986 ps	1.2521 ps	142000142
	JS: TJ@	Ch 1	15.345 ps	15.345 ps	15.345 ps	0.0000 s	0.0000 s	1	15.510 ps	14.585 ps	16.487 ps	1.9019 ps	353.37 fs	142
	JS: EW@	Ch 1	9.9847 ns	9.9847 ns	9.9847 ns	0.0000 s	0.0000 s	1	9.9845 ns	9.9835 ns	9.9854 ns	1.9019 ps	353.37 fs	142
	JS: RJ-dd	Ch 1	895.86 fs	895.86 fs	895.86 fs	0.0000 s	0.0000 s	1	885.24 fs	870.19 fs	902.13 fs	31.938 fs	9.3278 fs	142
	JS: DJ-dd	Ch 1	2.7408 ps	2.7408 ps	2.7408 ps	0.0000 s	0.0000 s	1	3.0557 ps	2.2763 ps	3.9579 ps	1.6817 ps	330.76 fs	142
	JS: PJ	Ch 1	3.9059 ps	3.9059 ps	3.9059 ps	0.0000 s	0.0000 s	1	4.2772 ps	3.5505 ps	5.3512 ps	1.8006 ps	375.46 fs	142
	JS: DDJ	Ch 1	0.0000 s	0.0000 s	0.0000 s	0.0000 s	0.0000 s	1	0.0000 s	0.0000 s	0.0000 s	0.0000 s	0.0000 s	142
	JS: DCD	Ch 1	604.81 fs	604.81 fs	604.81 fs	0.0000 s	0.0000 s	1	574.22 fs	432.18 fs	728.81 fs	296.63 fs	49.280 fs	142
Meas2	Frequency	Ch 1	100.00 MHz	99.923 MHz	100.08 MHz	154.83 kHz	17.491 kHz	1000000	100.00 MHz	99.912 MHz	100.10 MHz	183.89 kHz	16.988 kHz	142000000
Meas3	Phase Noise	Ch 1	351.78 fs	351.78 fs	351.78 fs	0.0000 s	0.0000 s	1	342.79 fs	247.46 fs	467.67 fs	220.21 fs	46.377 fs	142


Views

Time Domain View

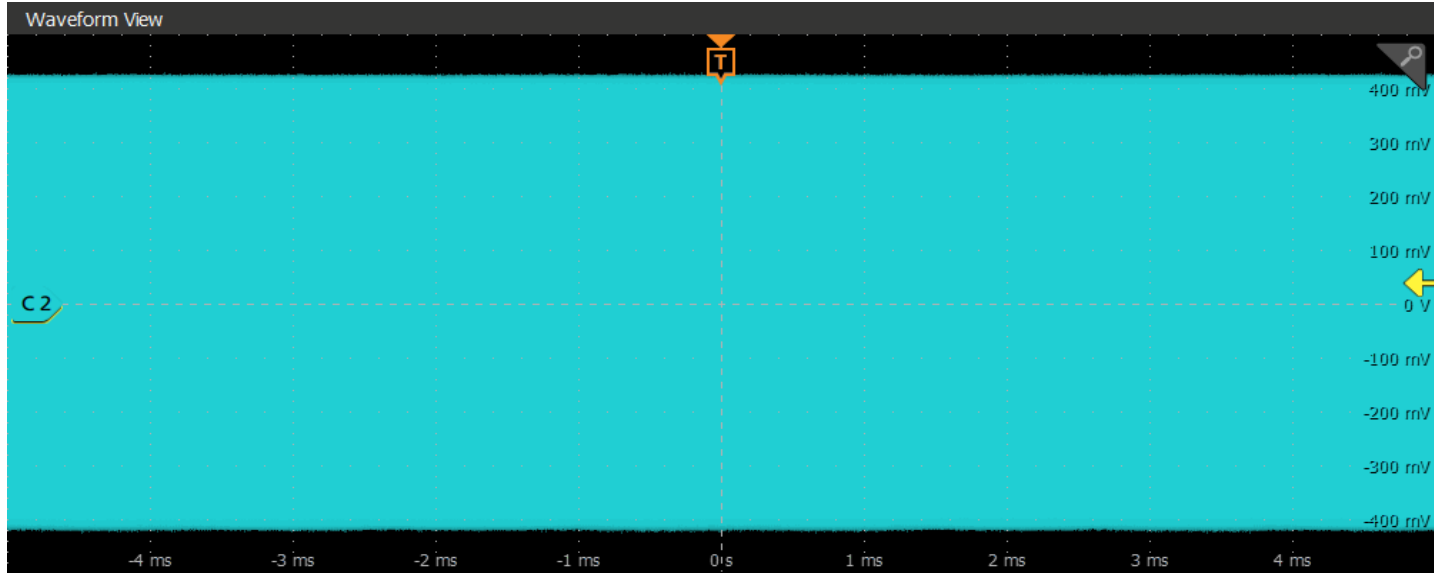


Plots

Plot 2 - TIE Spectrum (Meas 1)

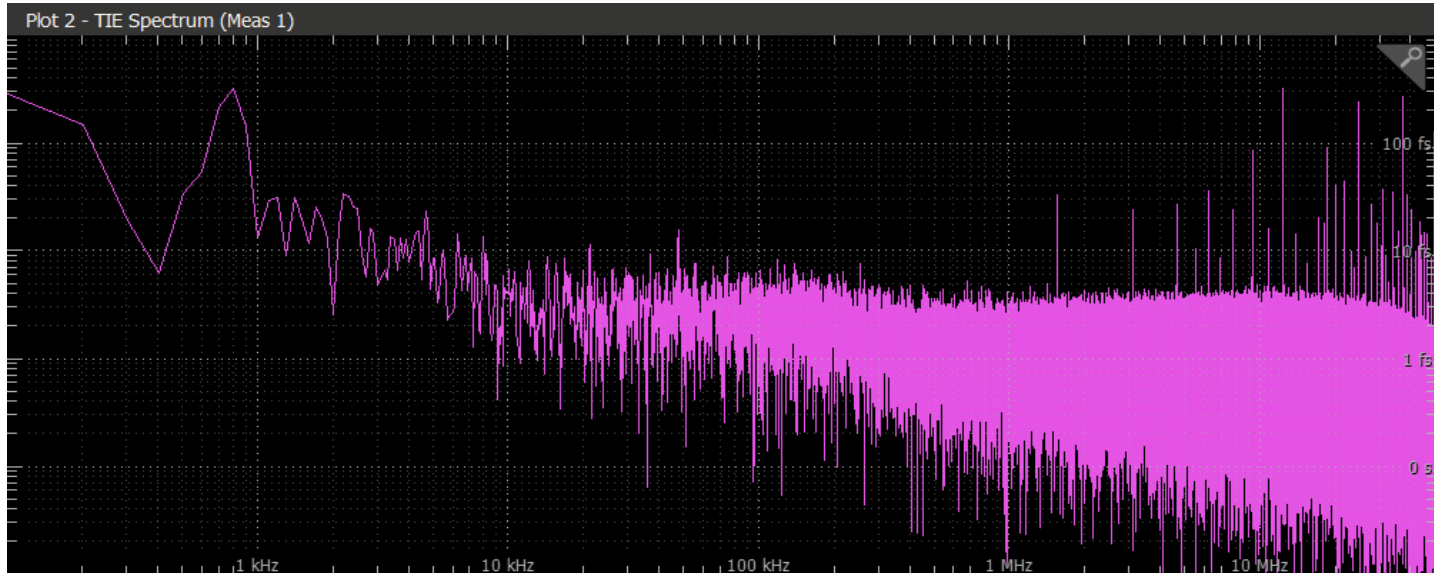

Plot 1 - TIE Histogram (Meas 1)

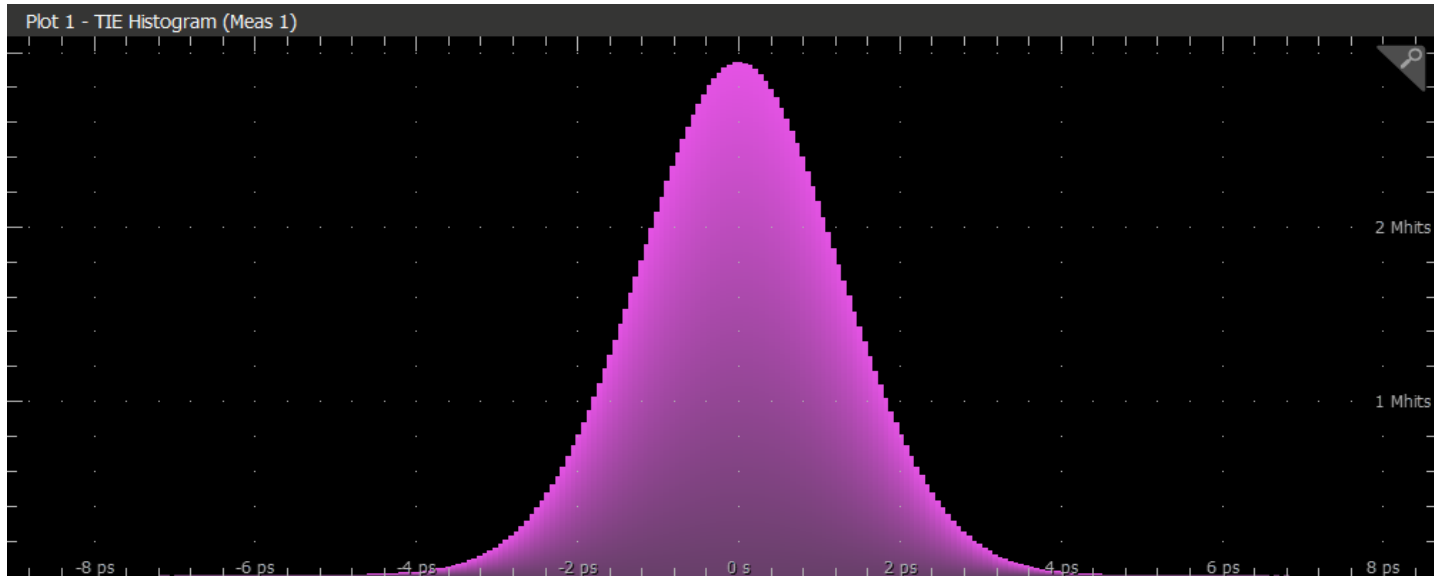

Global Configuration

Standard Configuration							
Gating	Display Unit Type	Standard Reference Levels	Jitter Separation Model	Dual Dirac Model	Jitter Reference Levels	Lock RJ	Jitter Analysis Method
None	Seconds	Every Acquisition	SpectralOnly	PCIExpress	First Acquisition	False	JitterOnly

Reference Levels Configuration

Ref Levels	Ch 1
Ref Level Type	Global
Base Top Method	Automatic
RiseHigh	90%
RiseMid	50%
RiseLow	10%
FallHigh	90%
FallMid	50%
FallLow	10%
Hysteresis	10%

Individual Measurement Configuration

Meas 1 - Jitter Summary											
Ref Levels		ClockRecovery		RjDj		Filter		Configurations		Gating	
Ref Level Type	Local	Method	Constant Clock	Signal Type	Auto	Filter Spec-High Pass(F1)	No Filter	Custom Measurement Name	Jitter Summary	Gating Type	None
Source	Ch 1	Mode	Mean	Clock Edge	RisingEdge	Filter Spec-Low Pass(F2)	No Filter				
Base Top Method	Automatic	Calculated On	Every Acquisition	BER	1E-12						
RiseHigh	80%			Pattern Detection	Manual						
RiseMid	50%			Pattern Type	Repeating						
RiseLow	20%			Pattern Length	2 UI						
FallHigh	80%										
FallMid	50%										
FallLow	20%										
Hysteresis	5%										

Meas2 - Frequency									
Ref Levels		Edge		Filter		Configurations		Gating	
Ref Level Type	Global	Edge	First	Filter Spec-High Pass(F1)	No Filter	Custom Measurement Name	Frequency	Gating Type	None
Source(s)	Ch 1			Filter Spec-Low Pass(F2)	No Filter				

Meas3 - Phase Noise											
Ref Levels		ClockRecovery		Edge		Filter		Configurations		Gating	
Ref Level Type	Global	Method	Constant Clock	Upper Noise Integration Limit	1.0000 MHz	Filter Spec-High Pass(F1)	No Filter	Custom Measurement Name	Phase Noise	Gating Type	None
Source(s)	Ch 1	Mode	Mean	Lower Noise Integration Limit	0.0000 Hz	Filter Spec-Low Pass(F2)	No Filter				
		Calculated On	Every Acquisition								