

Linear suspended down light LED luminaire, Product provides full glow excellent lighting quality is topped up with Various LED color temperatures



Features/Specifications	Benefits
Pressure die cast aluminium Housing	Excellent thermal management
Co-extruded polycarbonate, Housing & Diffuser	Uniform glare free illumination
Acoustic polyester fiber (PET)	Aesthetically appealing, helps absorbing sound
Housing made of weaved with weaved with jute threads	For contemporary interiors
Stainless Steel Hardware	Corrosion free & longer service life
Outer ring made up of Engineering Plastic	Aesthetically Superior look
SS Bottom frame fixed with captive (loss proof) screw	Ease of maintenance
Top cover	Protection against IP & accident
Powder coated White /Black / Grey	Corrosion Free, Longer Service Life
High Efficiency Transulcence (HET) Diffuser	Uniform Light Distribution without glare
Microprismatic UGR <19 Diffuser	Provides low glare with uniform light output
Toughened Glass - Frosted	Diffused light with protection against dust and impact
Fresnel lens	Uniform wider illumination



Installation:

- Provision for mounting on surface with the help of specially designed mounting bracket & hardware (provided with product).
- Luminaire is designed for installation with suspension.
- Hole provided on bracket suitable for mounting with M8/M10 bolt, nut & washer (hardware is not in Wipro scope)

Application:

- Ideal for Modern work spaces Lobbies, Corridors / office spaces.

Dimension Drawing :

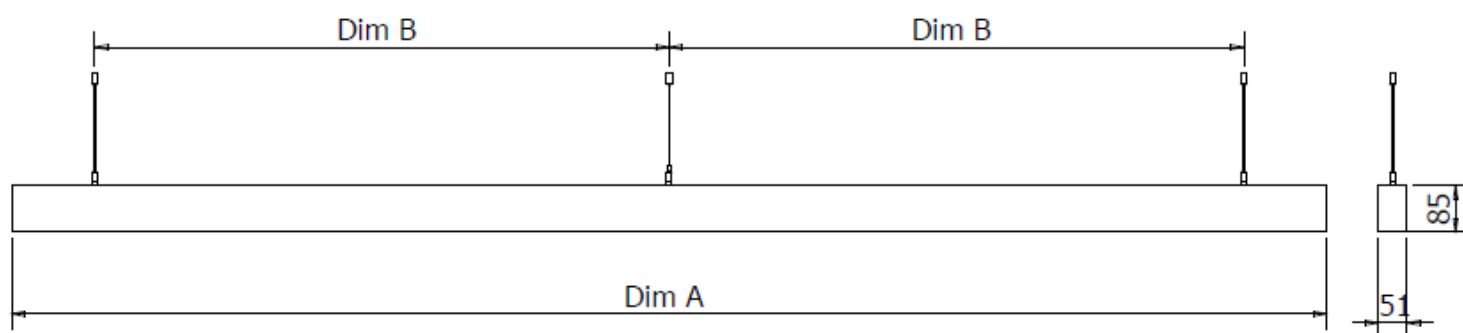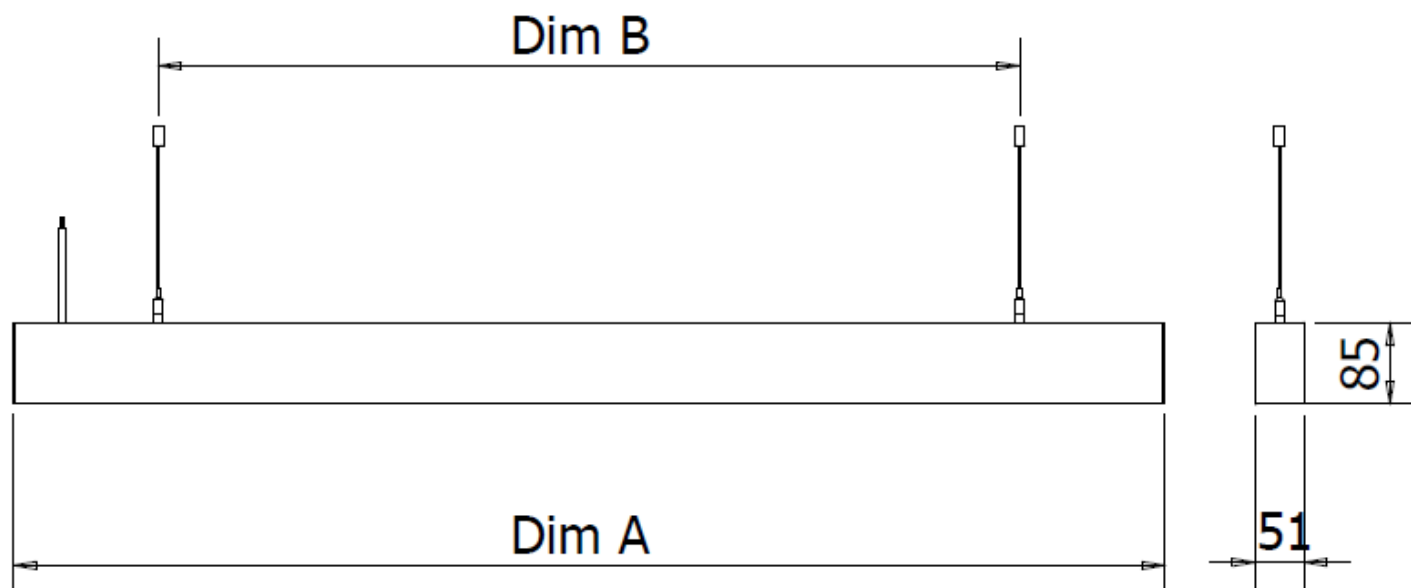

Electrical Data:

Sr.No	Product CAT No	CCT(K)	Sys. Wattage W(#)	Rated Voltage (VAC)	*Mains Current (Amps)	CaseLot	Approx Weight (Kgs)	Variant
1	LS0610120PG24050CS	5700K	40	240	0.18	21	5.4	