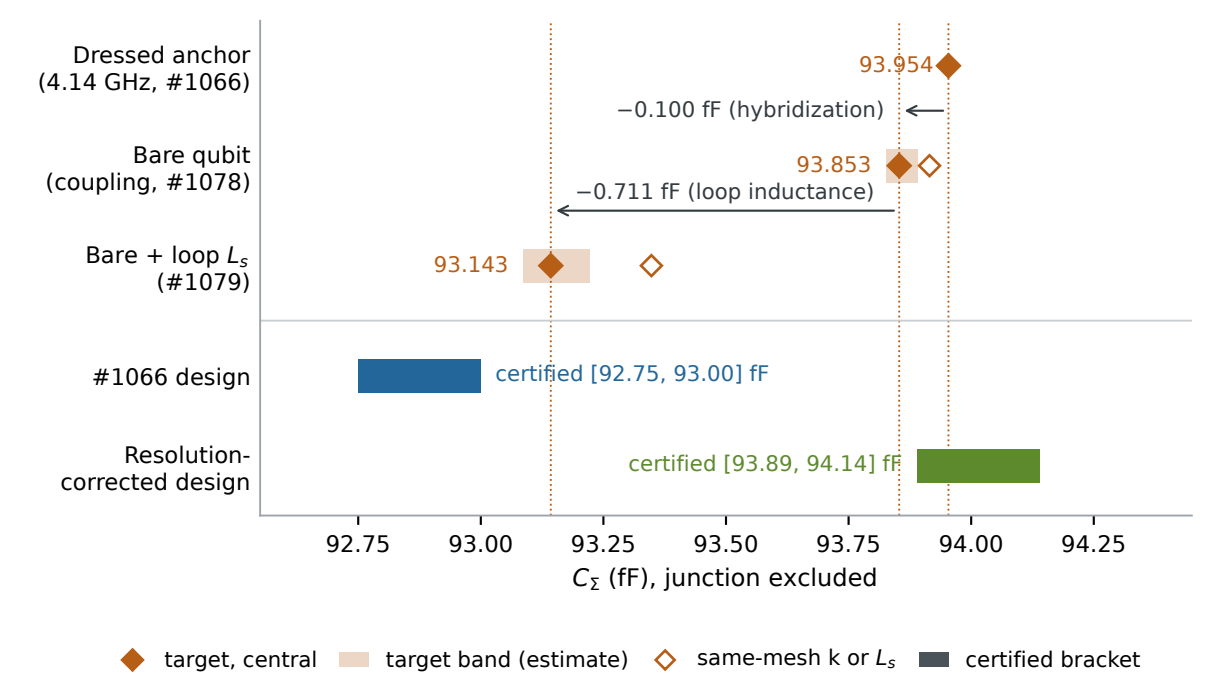
Dressed anchor
(4.14 GHz, #1066)
93.954
−0.100 fF (hybridization)
Bare qubit
(coupling, #1078)
93.853
−0.711 fF (loop inductance)
Bare + loop L_s
(#1079)
93.143
#1066 design
certified [92.75, 93.00] fF
Resolution-
corrected design
certified [93.89, 94.14] fF
92.75
93.00
93.25
93.50
93.75
94.00
94.25
C_Σ (fF), junction excluded
target, central
target band (estimate)
same-mesh k or L_s
certified bracket