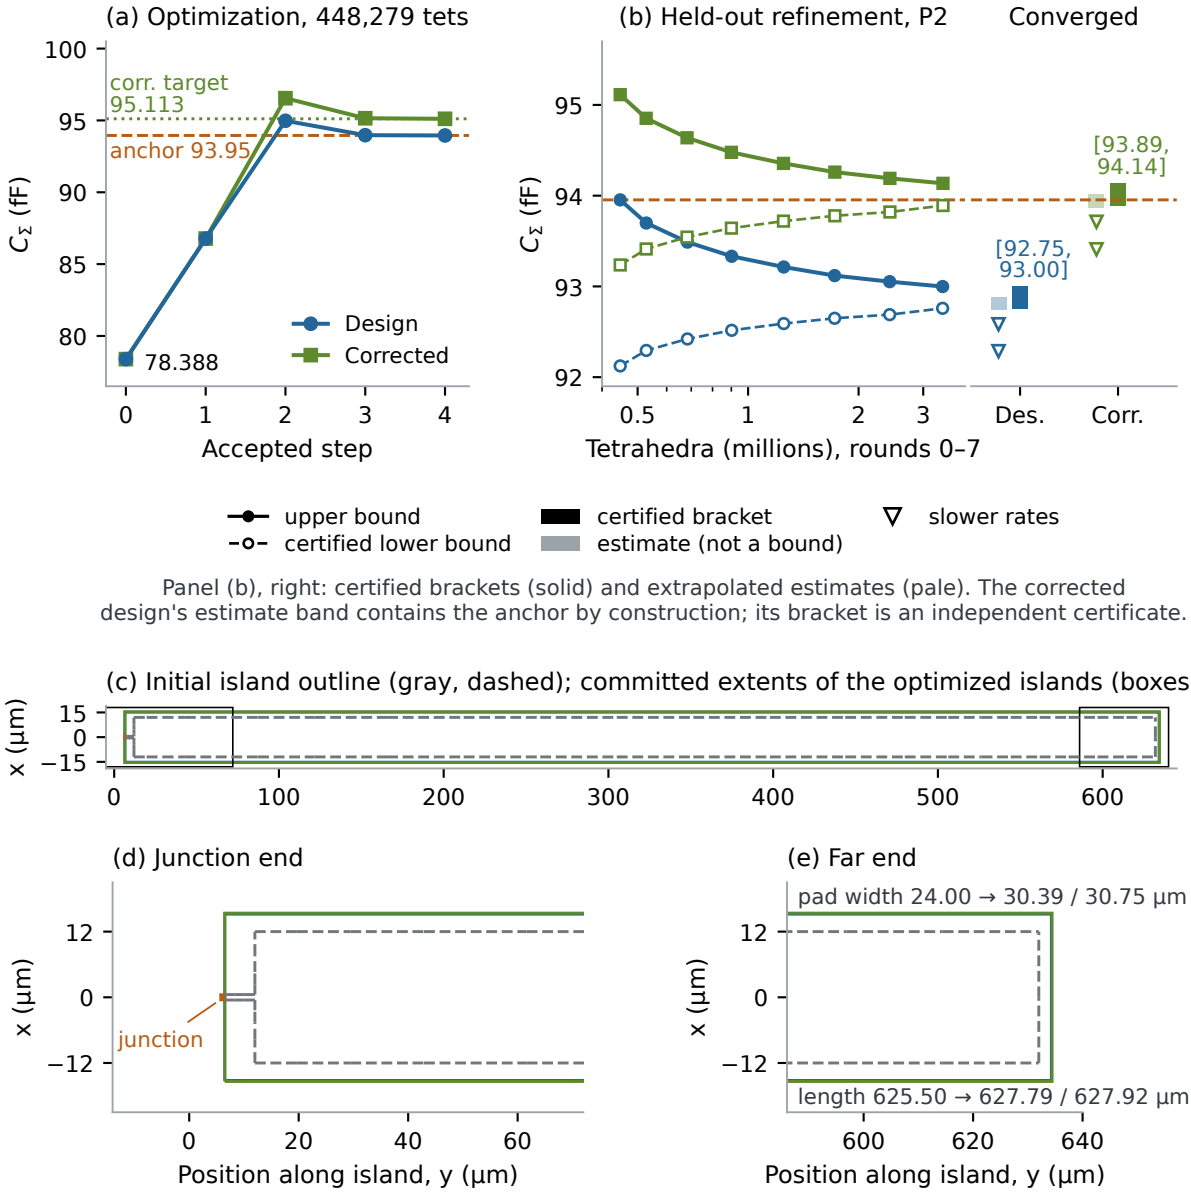
(a) Optimization, 448,279 tets
corr. target 95.113
anchor 93.95
78.388
Design
Corrected
C_Σ (fF)
Accepted step
(b) Held-out refinement, P2
Converged
[93.89, 94.14]
[92.75, 93.00]
Des.
Corr.
Tetrahedra (millions), rounds 0–7
upper bound
certified lower bound
certified bracket
estimate (not a bound)
slower rates
Panel (b), right: certified brackets (solid) and extrapolated estimates (pale). The corrected design's estimate band contains the anchor by construction; its bracket is an independent certificate.
(c) Initial island outline (gray, dashed); committed extents of the optimized islands (boxes)
x (µm)
(d) Junction end
junction
Position along island, y (µm)
(e) Far end
pad width 24.00 → 30.39 / 30.75 µm
length 625.50 → 627.79 / 627.92 µm
Position along island, y (µm)