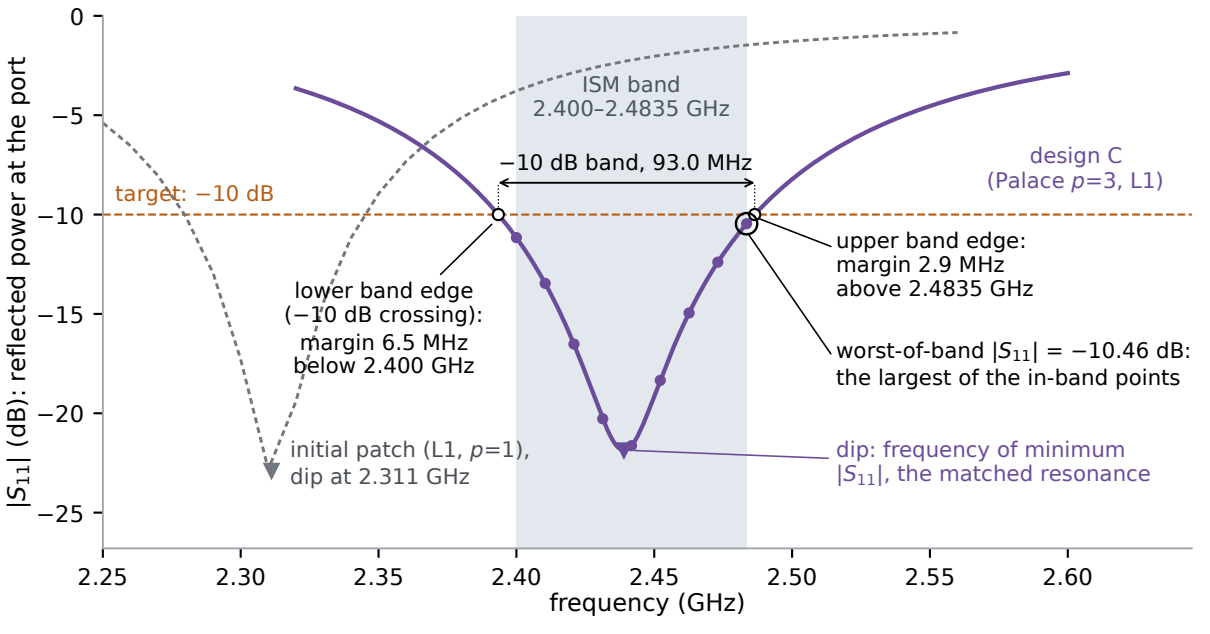
ISM band
2.400–2.4835 GHz
−10 dB band, 93.0 MHz
target: −10 dB
design C
(Palace p=3, L1)
upper band edge:
margin 2.9 MHz
above 2.4835 GHz
lower band edge
(−10 dB crossing):
margin 6.5 MHz
below 2.400 GHz
worst-of-band |S11| = −10.46 dB:
the largest of the in-band points
initial patch (L1, p=1),
dip at 2.311 GHz
dip: frequency of minimum
|S11|, the matched resonance
|S11| (dB): reflected power at the port
frequency (GHz)
0
−5
−10
−15
−20
−25
2.25
2.30
2.35
2.40
2.45
2.50
2.55
2.60