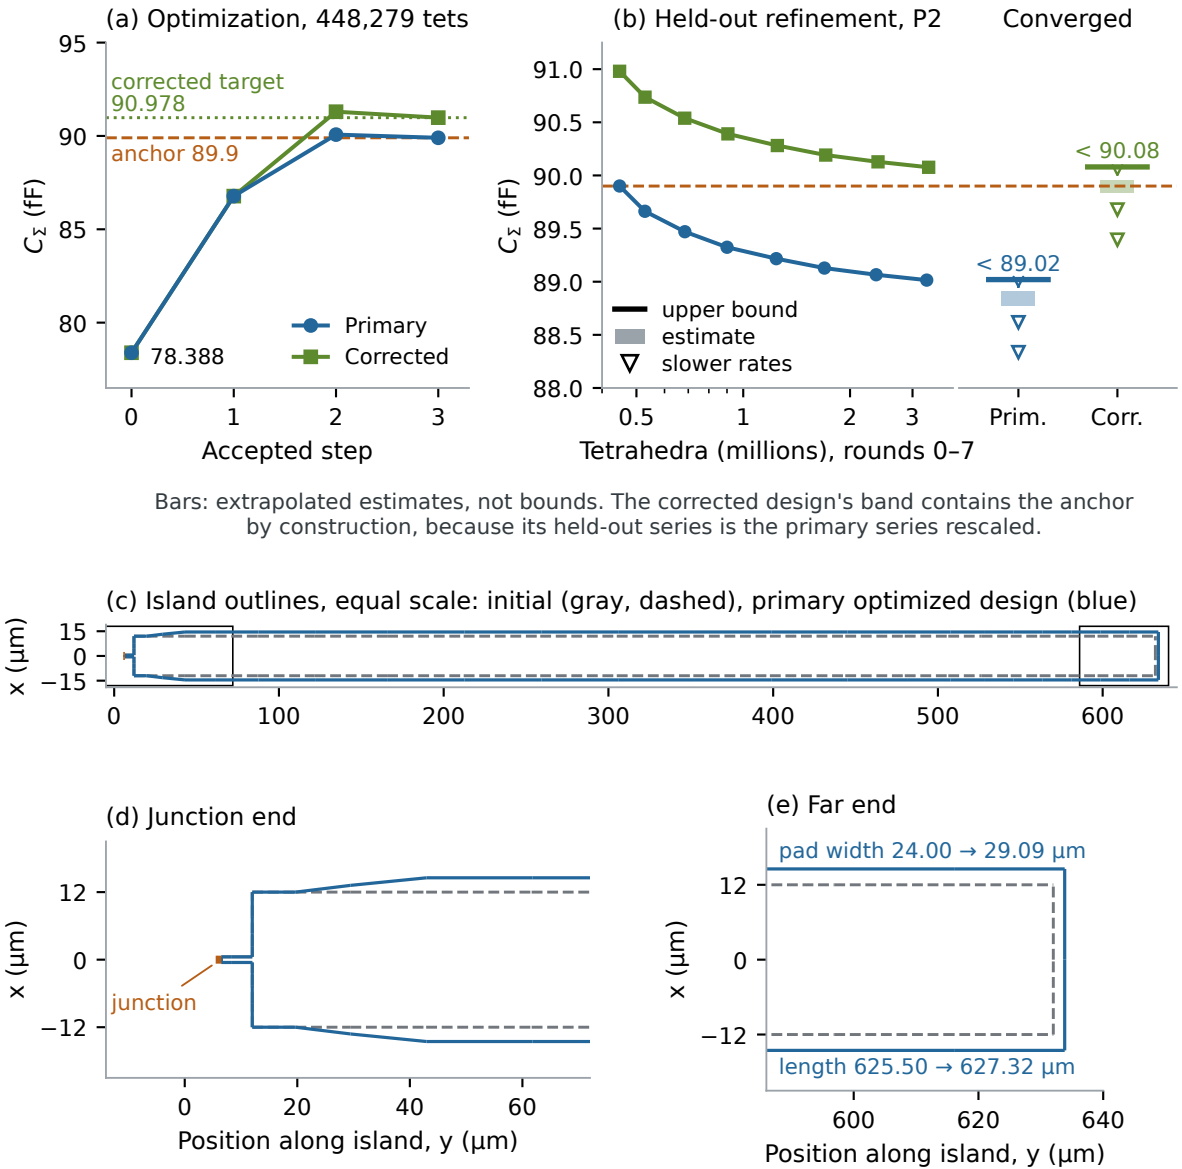
(a) Optimization, 448,279 tets
corrected target
90.978
anchor 89.9
78.388
Primary
Corrected
C_Σ (fF)
Accepted step
(b) Held-out refinement, P2
Converged
upper bound
estimate
slower rates
< 89.02
< 90.08
Prim.
Corr.
Tetrahedra (millions), rounds 0–7
Bars: extrapolated estimates, not bounds. The corrected design's band contains the anchor by construction, because its held-out series is the primary series rescaled.
(c) Island outlines, equal scale: initial (gray, dashed), primary optimized design (blue)
x (µm)
(d) Junction end
junction
Position along island, y (µm)
(e) Far end
pad width 24.00 → 29.09 µm
length 625.50 → 627.32 µm
x (µm)
Position along island, y (µm)