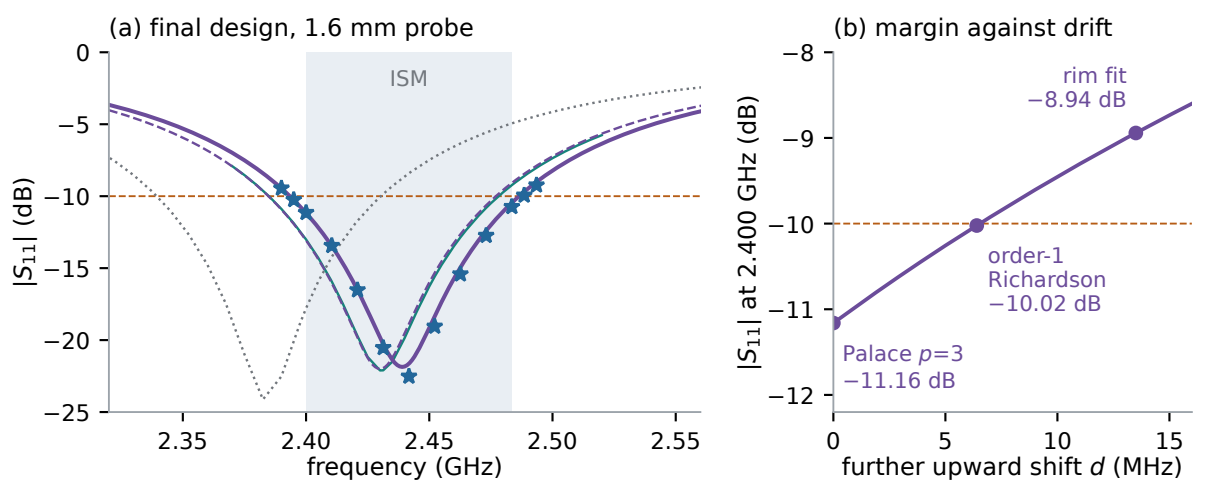
(a) final design, 1.6 mm probe
ISM
$|S_{11}|$ (dB)
frequency (GHz)
(b) margin against drift
rim fit
−8.94 dB
order-1
Richardson
−10.02 dB
Palace p=3
−11.16 dB
$|S_{11}|$ at 2.400 GHz (dB)
further upward shift d (MHz)
geode-fem p=1, L1 (optimization model)
geode-fem p=1, 0.2 mm rim
Palace p=2, L1
Palace p=3, L1
geode-fem p=1, 0.1 mm rim + slab