

bldc_controller_routed

Design Report

Rev 1 | 2026-06-16 | jlcpcb-tier1

kicad-tools 0.13.0

Board Summary

Property	Value
Layers	4 copper (F.Cu, In1.Cu, In2.Cu, B.Cu)
Footprints	55 (40 SMD, 11 THT, 4 other)
Nets	52
Traces	881 segments
Vias	56
Board Size	80.0 x 100.0 mm

Design Overview

Theory of Operation

BLDC Motor Controller

3-Phase Brushless DC Motor Driver

Thermal analysis and high-current routing demo

Power Architecture

Power Rails: +24V, +3V3, +5V, GND, PWR_FLAG

Regulator	Device
U1	LM2596-5.0
U2	AMS1117-3.3

Assembly Notes

1 fine-pitch component; 4 polarized components

- **Fine-pitch components:** 1 (U10)
- **Polarized components:** 4 -- check orientation markings


ERC Status

Metric	Count
Errors	0
Warnings	0


Status: SKIPPED -- ERC skipped by user request


Schematic Overview

Schematic: bldc_controller

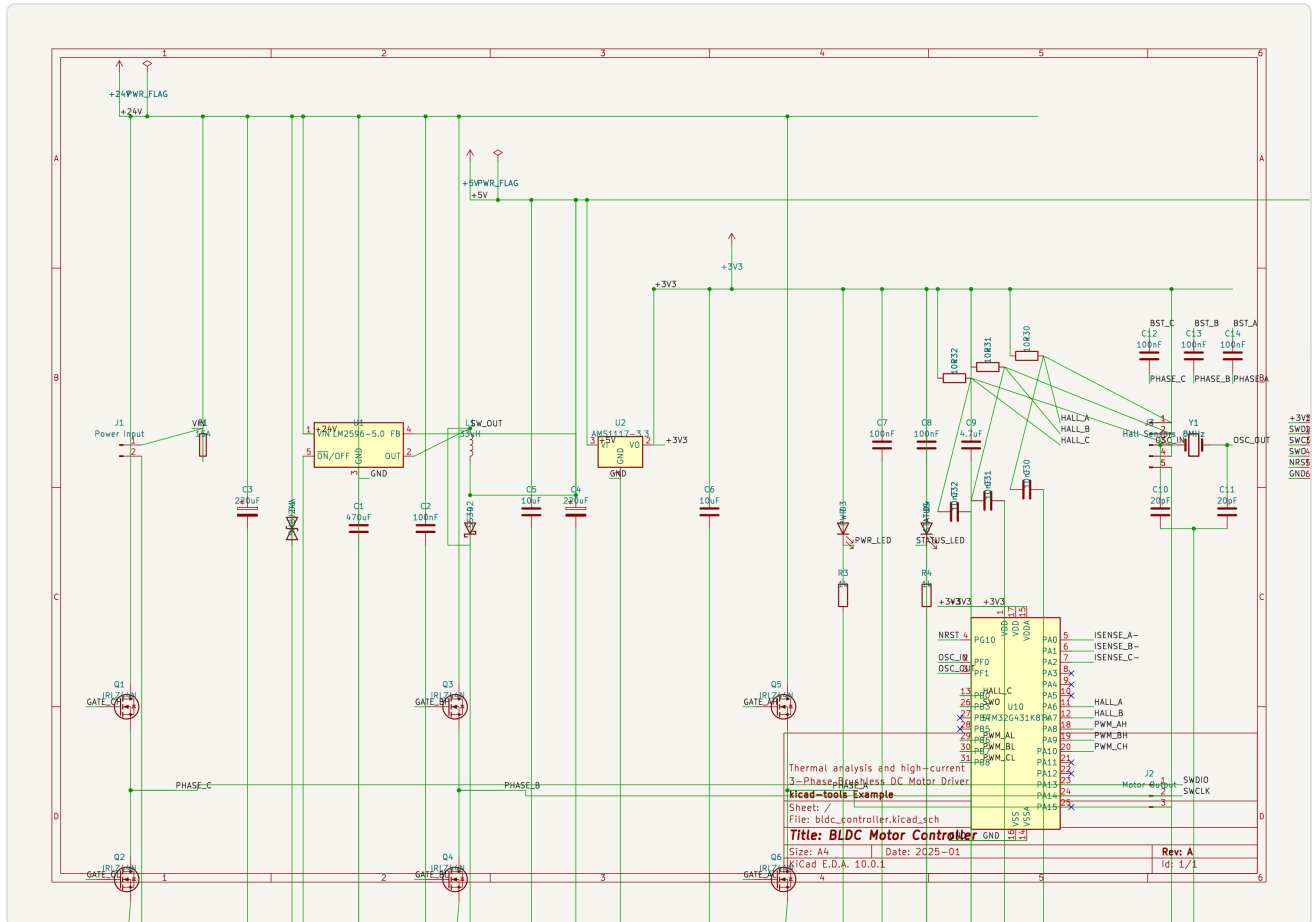


PCB Layout

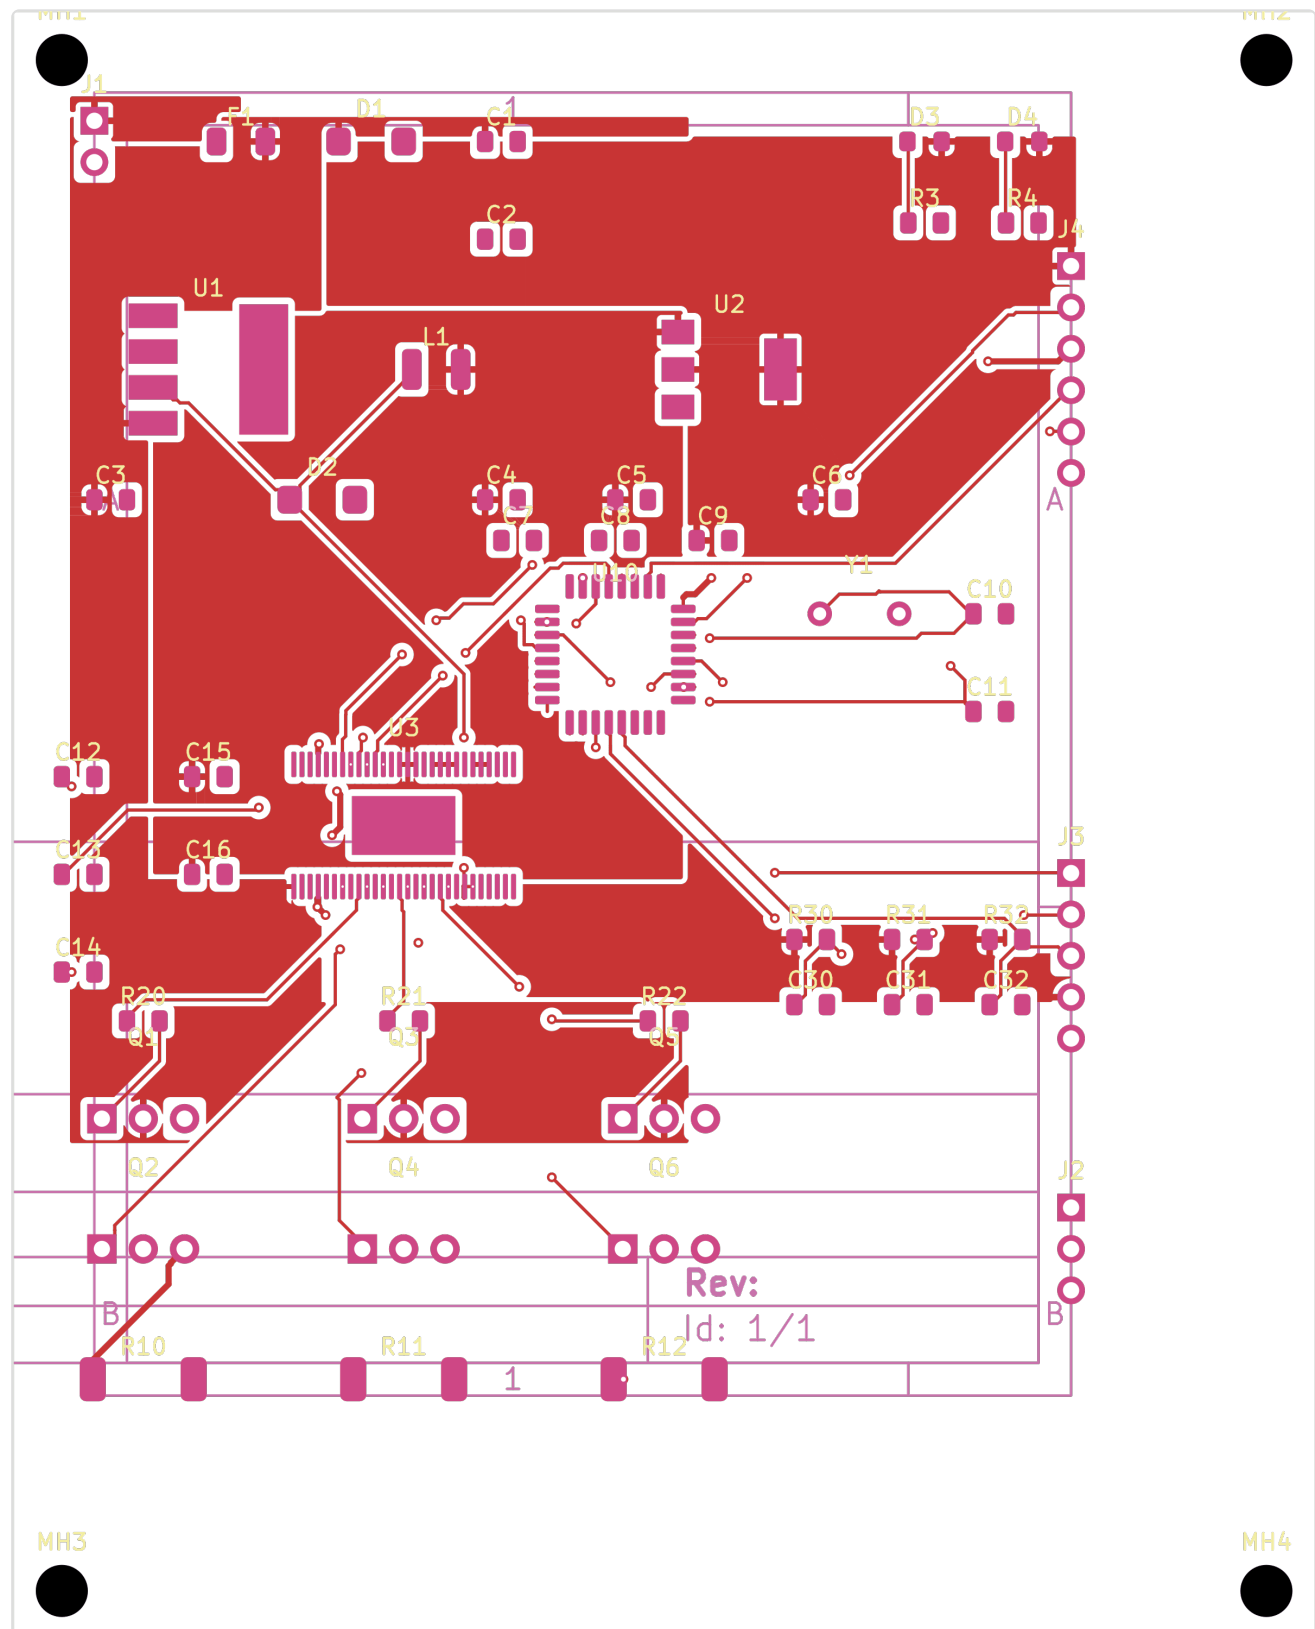


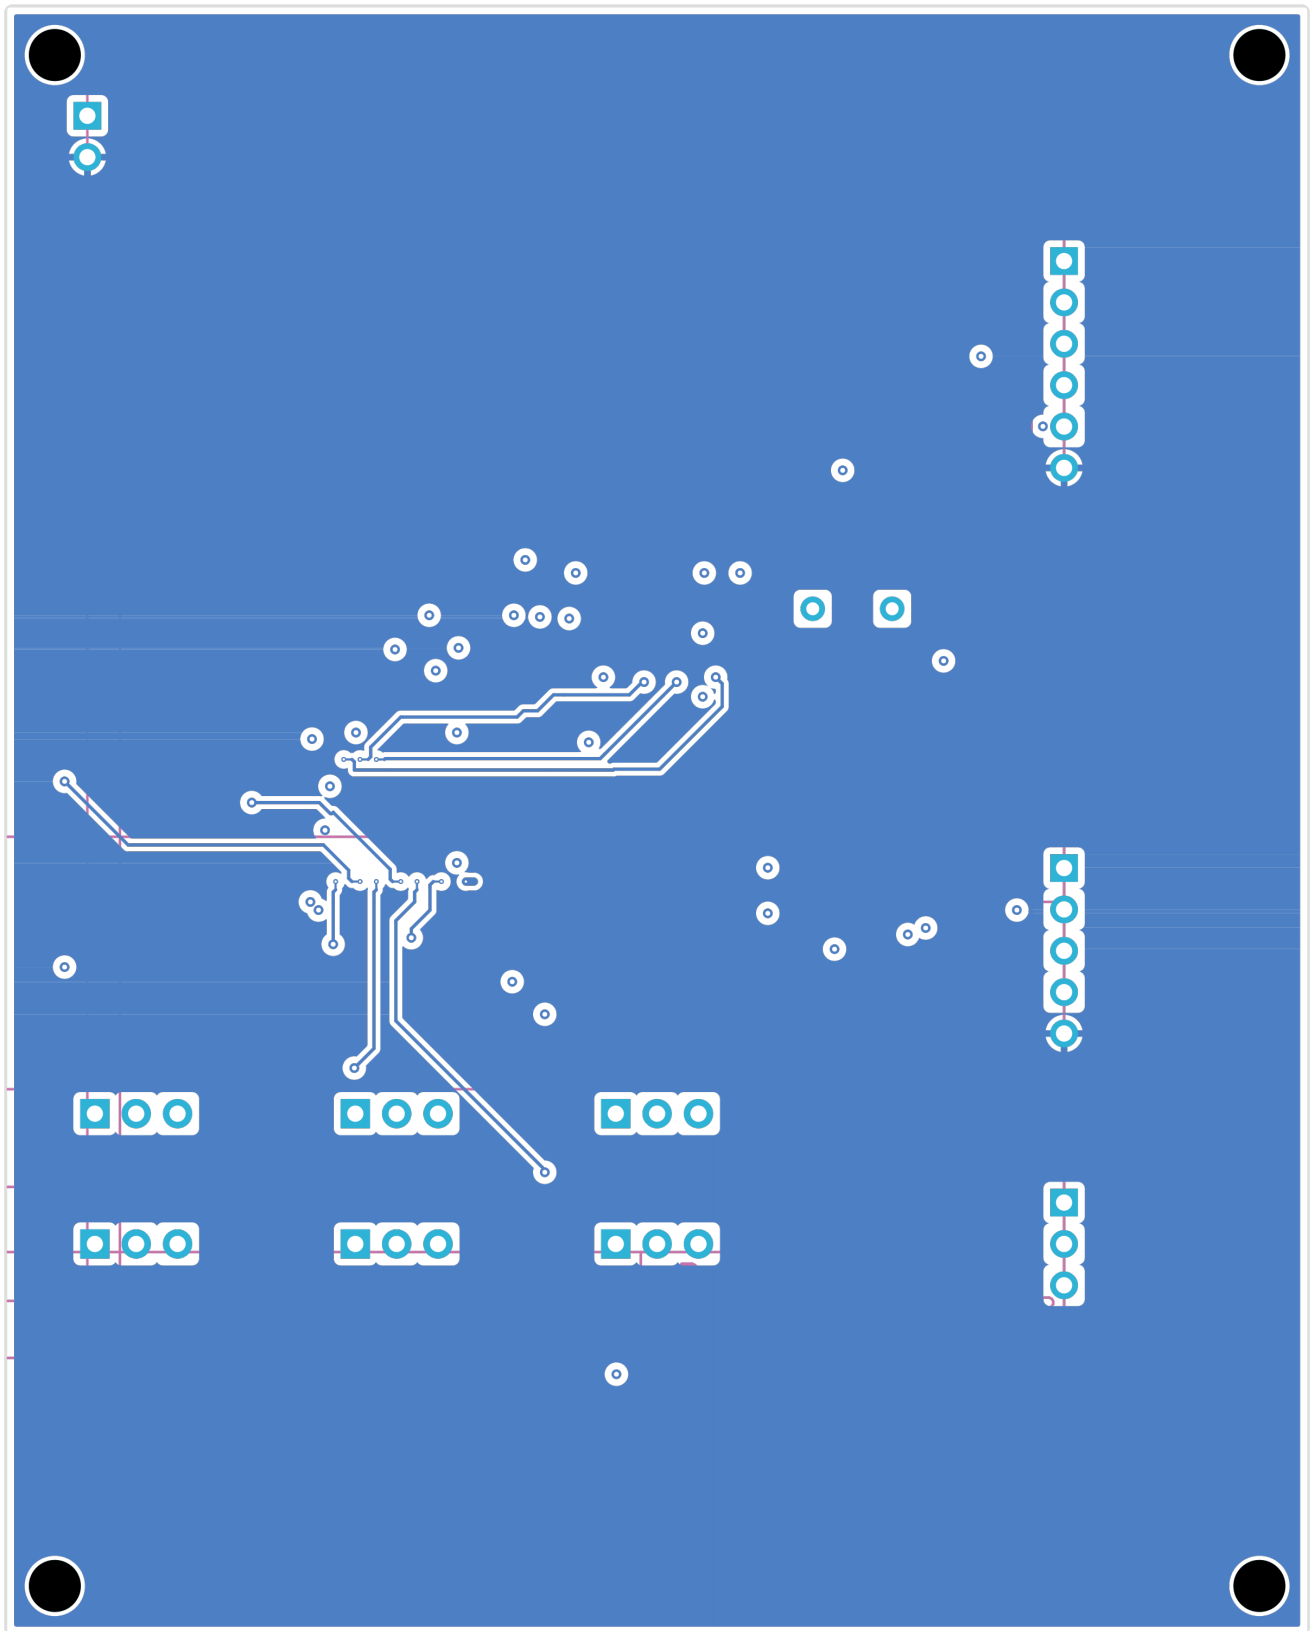

Copper

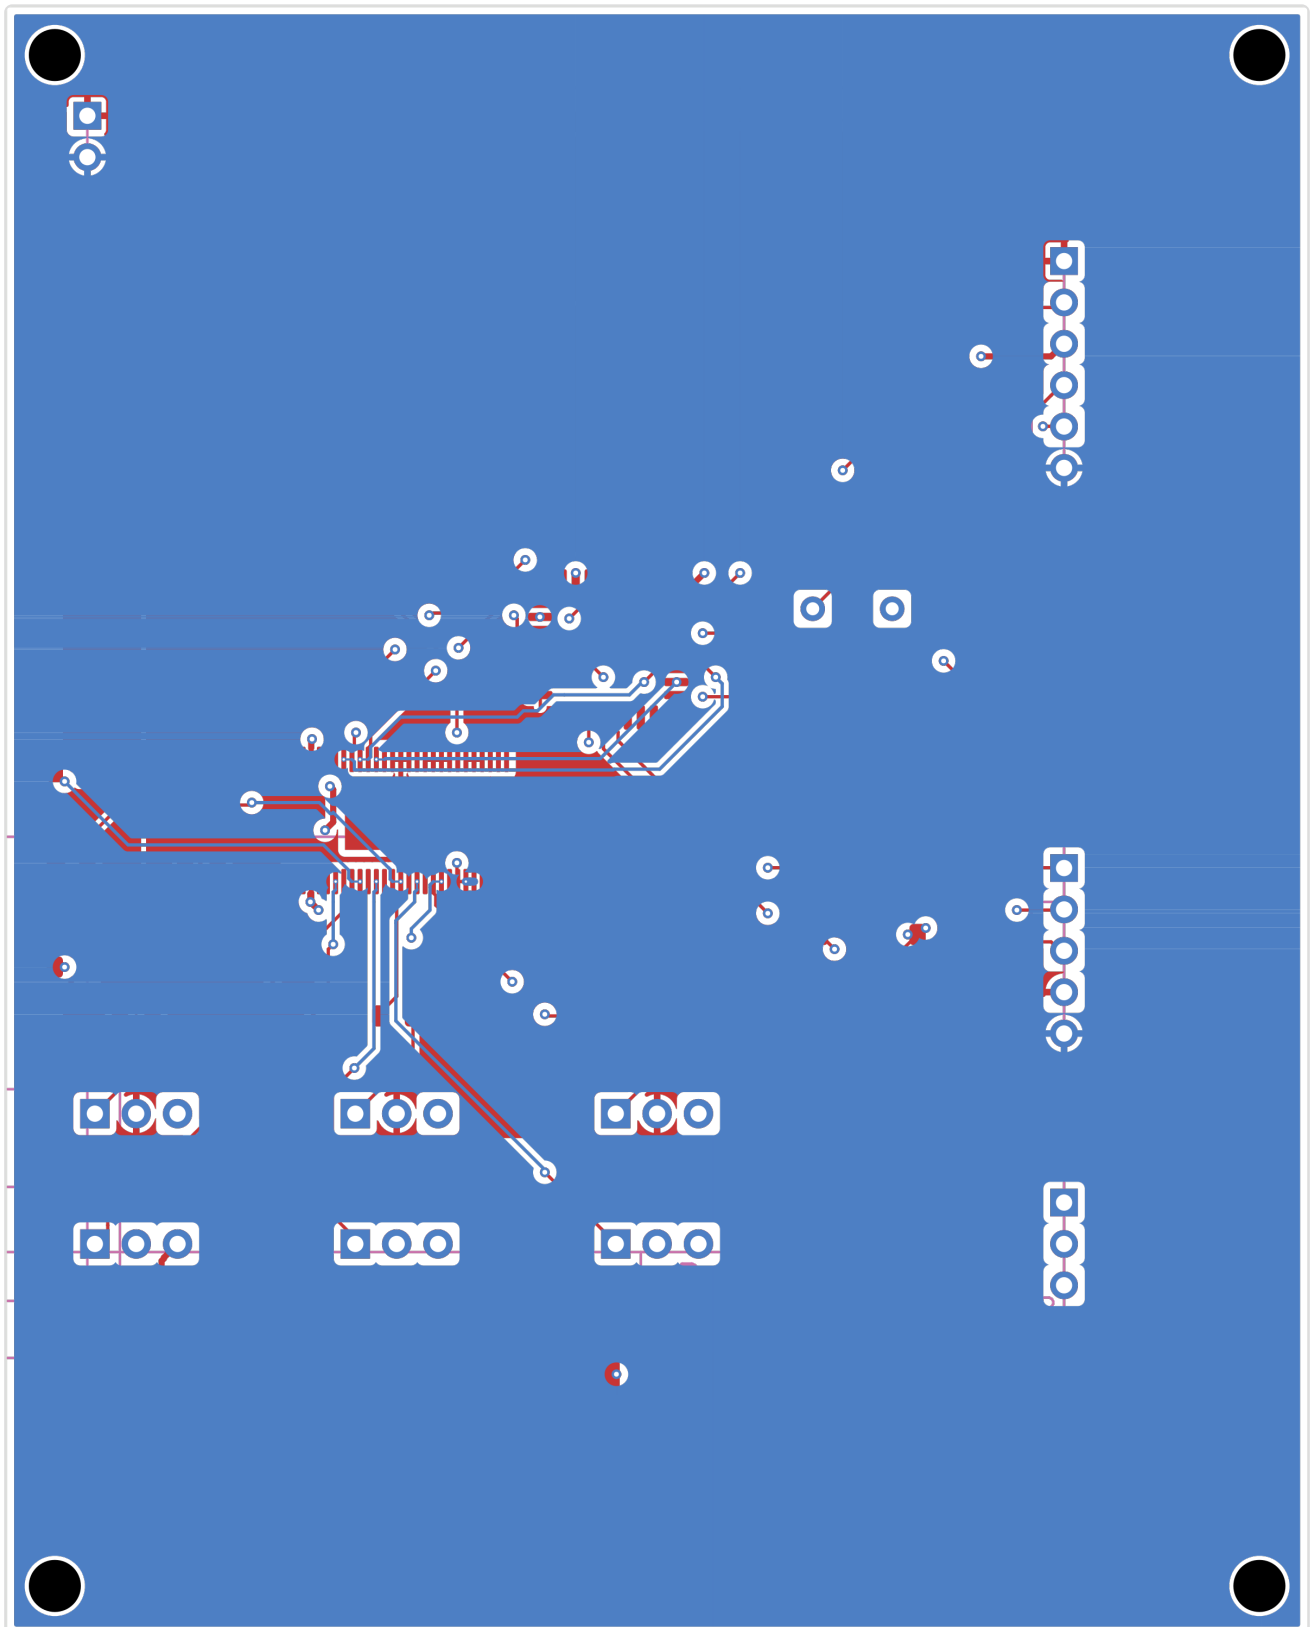


Assembly

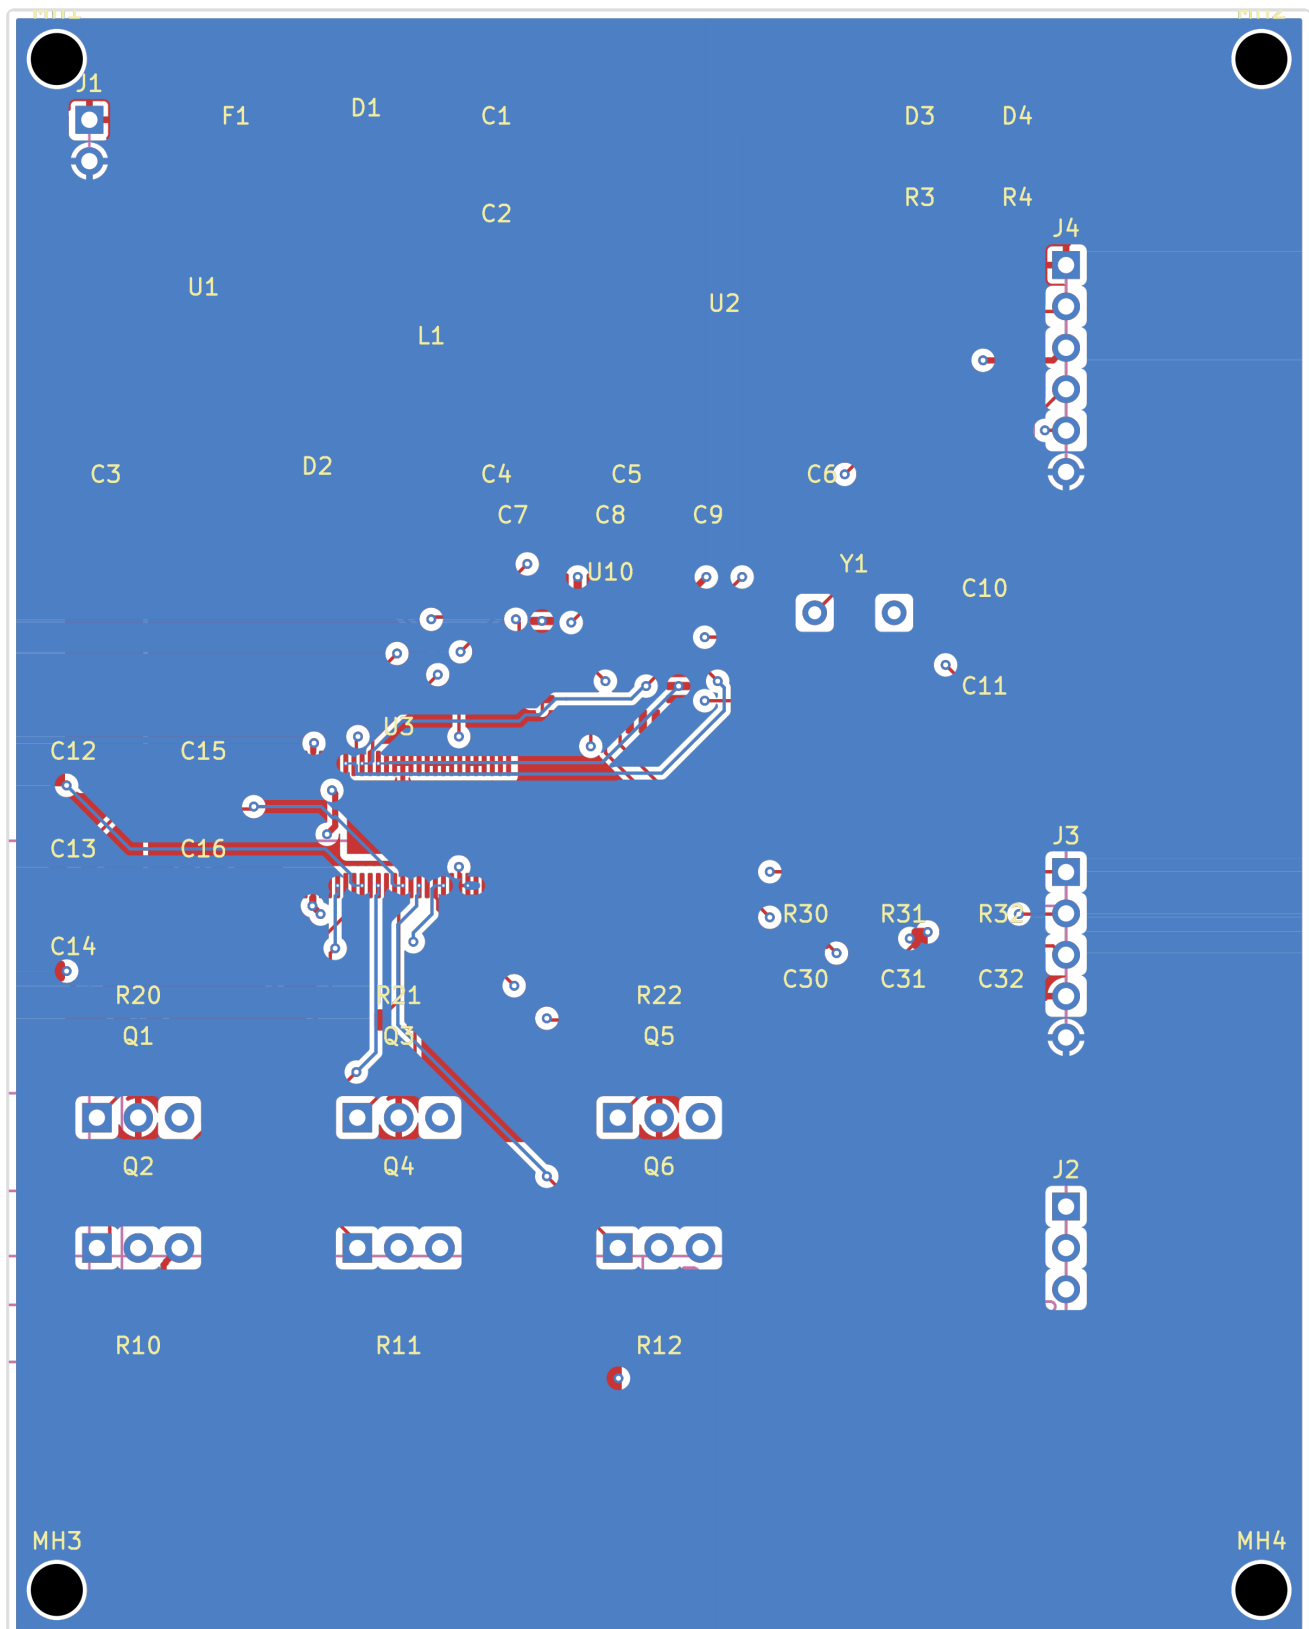


Copper Layers


F.Cu

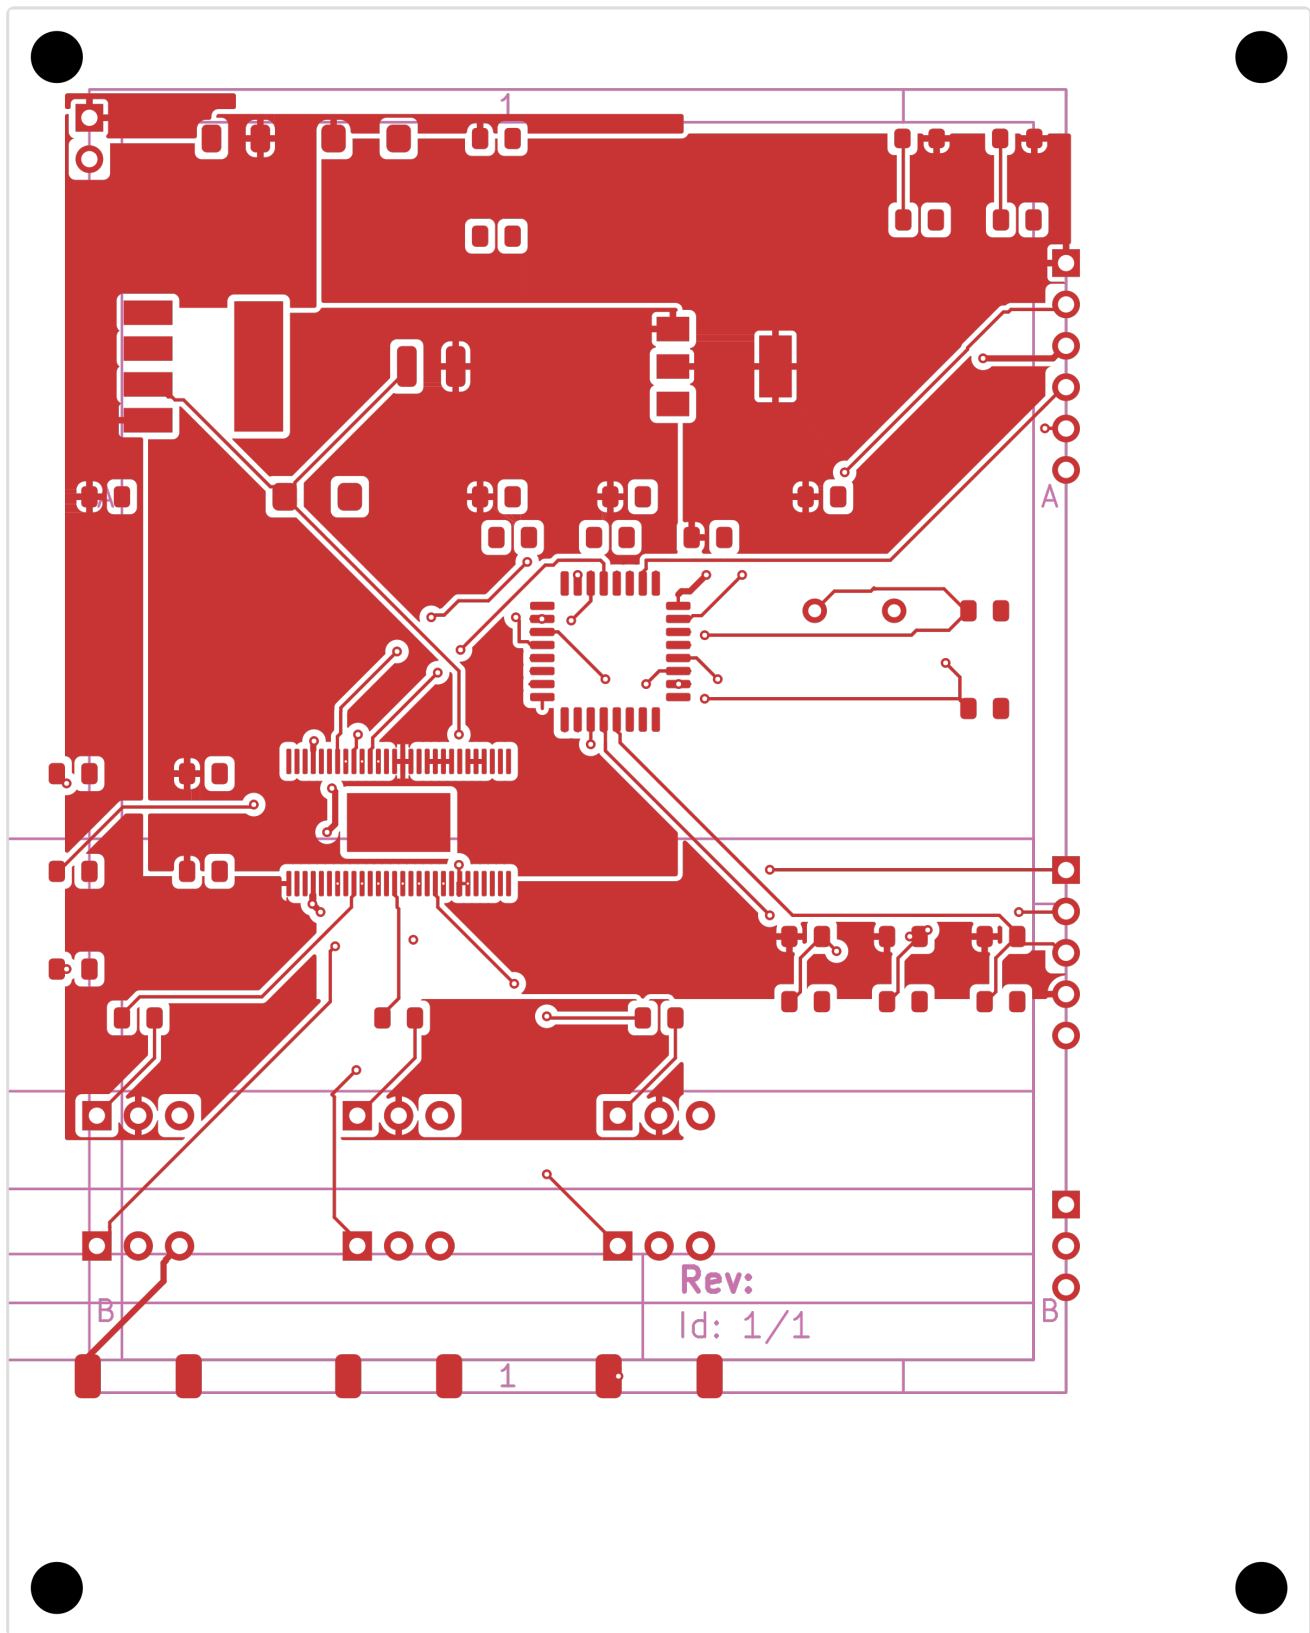


In1.Cu

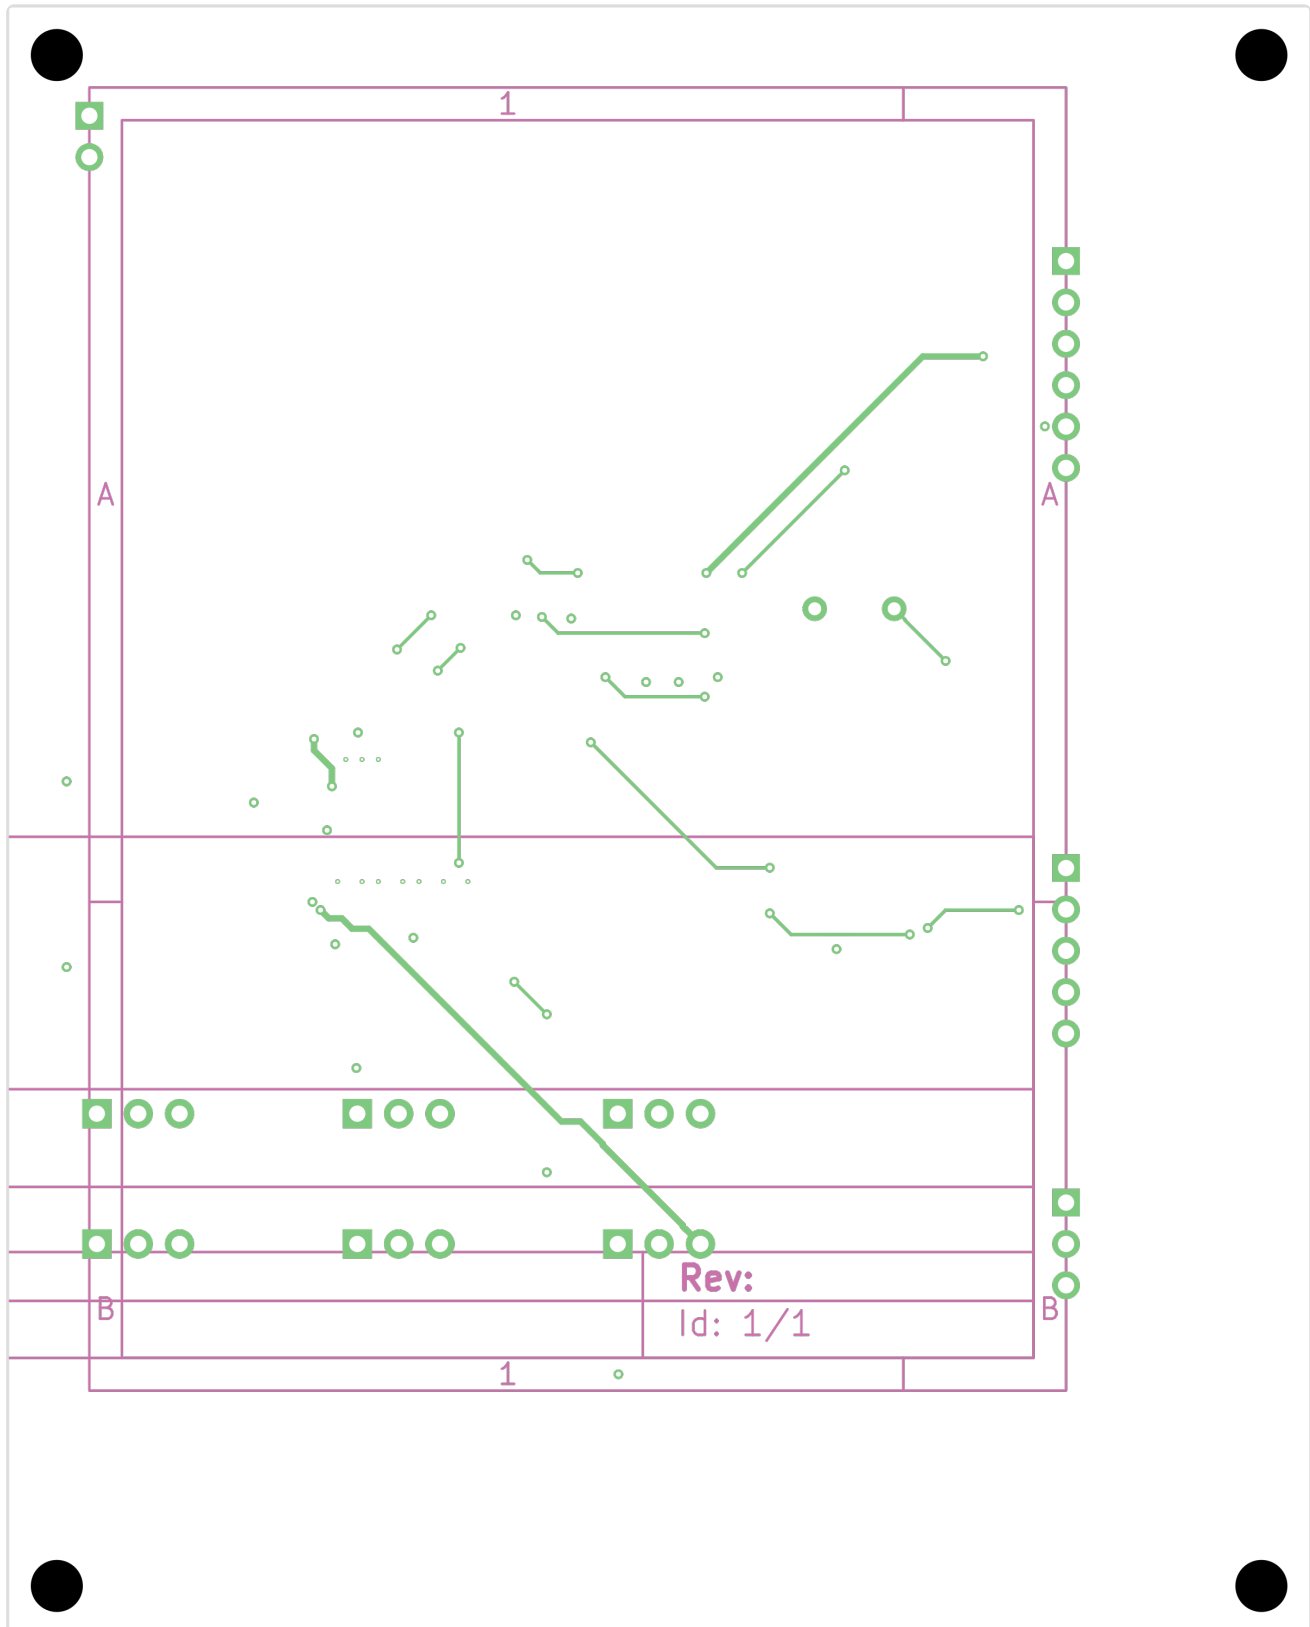

In2.Cu

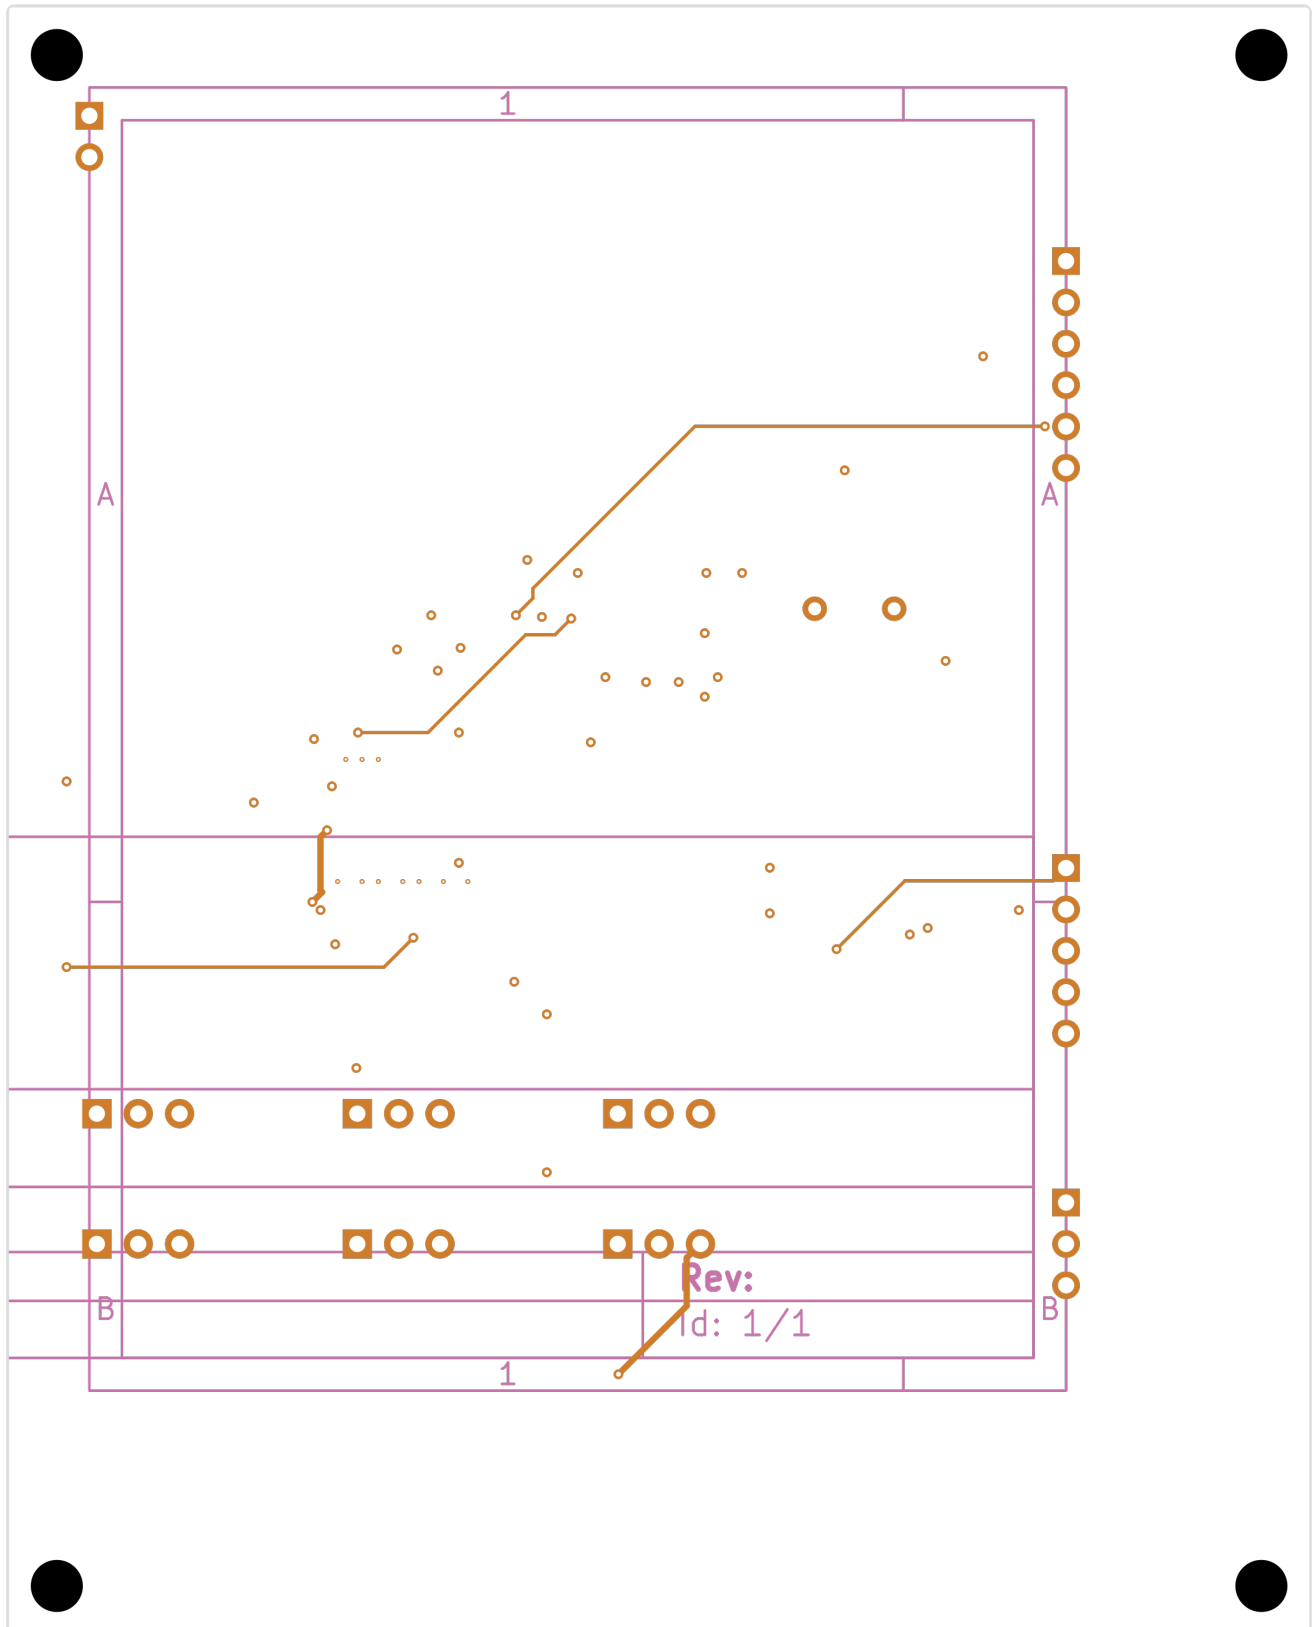

B.Cu

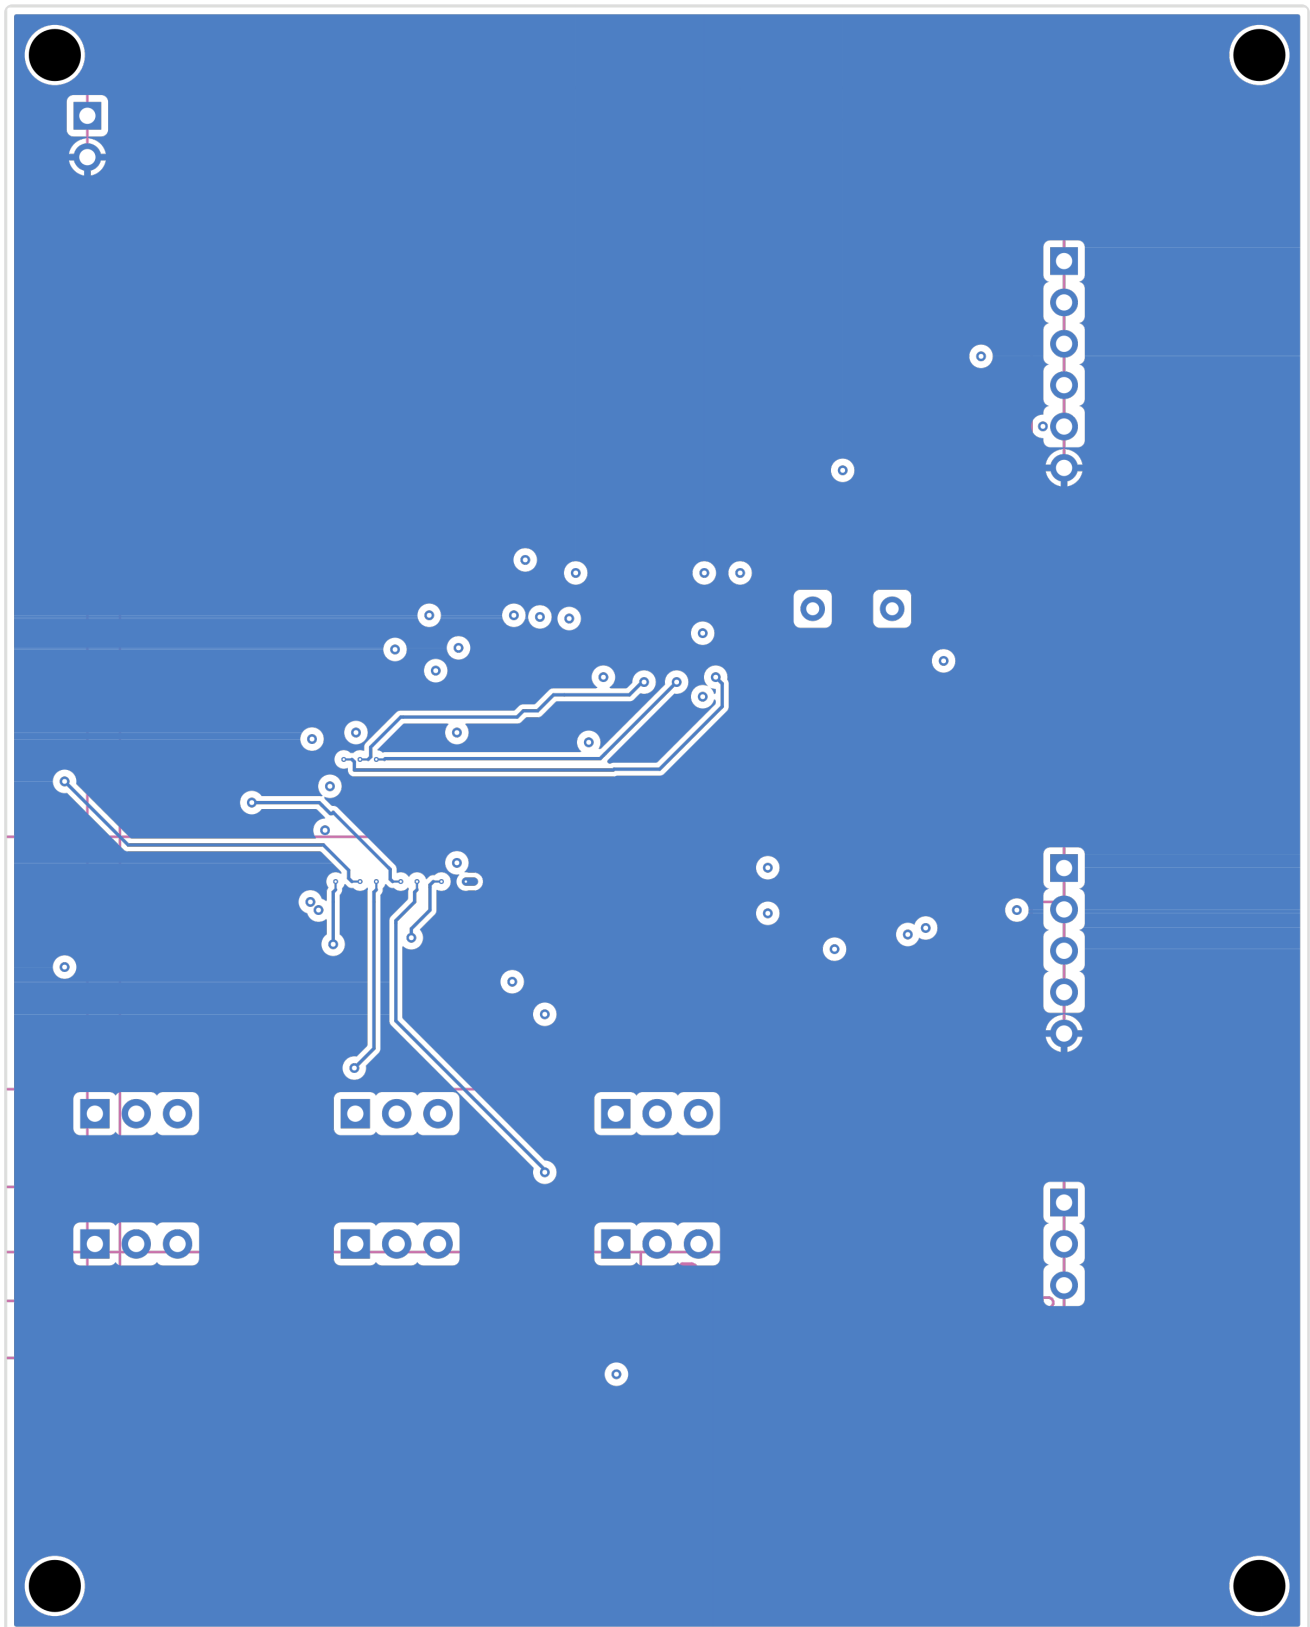

Bill of Materials

Value	Package	Qty	References
100nF	C_0805_2012Metric	7	C2, C7, C8, C12, C13, C14, C15
10nF		3	C30, C31, C32
10uF	C_0805_2012Metric	3	C5, C6, C16
20pF		2	C10, C11
220uF	C_0805_2012Metric	2	C3, C4
4.7uF	C_0805_2012Metric	1	C9
470uF	C_0805_2012Metric	1	C1
PWR		1	D3
SMBJ24A	D_SMA	1	D1
SS34	D_SMA	1	D2
STATUS		1	D4
15A	Fuse_1206_3216Metric	1	F1
Hall Sensors	PinHeader_1x05_P2.54 mm_Vertical	1	J3
Motor Output	PinHeader_1x03_P2.54 mm_Vertical	1	J2
Power Input	PinHeader_1x02_P2.54 mm_Vertical	1	J1
SWD-6		1	J4
33uH	L_1210_3225Metric	1	L1
IRLZ44N		6	Q1, Q2, Q3, Q4, Q5, Q6
10k		3	R30, R31, R32
1k		2	R3, R4
22		3	R20, R21, R22
5mR		3	R10, R11, R12
AMS1117-3.3	SOT-223-3_TabPin2	1	U2
DRV8301	HTSSOP-56-1EP_6.1x14mm_P0.5mm_EP3.61x6.35mm	1	U3
LM2596-5.0	TO-263-5_TabPin3	1	U1

Value	Package	Qty	References
STM32G431K8Tx	LQFP-32_7x7mm_P0.8 mm	1	U10
8MHz		1	Y1

DRC Status

Metric	Count
Errors	36
Warnings	0
Blocking	36

Status: FAIL

Violations by Type

Violation Type	Count
kicad-cli:starved_thermal	12
kicad-cli:annular_width	10
kicad-cli:via_diameter	10
connectivity	9
single_pad_net	8
kicad-cli:hole_clearance	4

Manufacturing Readiness

Verdict: NOT_READY

Action Items

- **[CRITICAL]** Fix 36 blocking DRC violations (kicad-cli: starved_thermal (12), annular_width (10), via_diameter (10))
- **[CRITICAL]** Increase min via drill: 0.150mm < 0.200mm required
- **[OPTIONAL]** Verify zone fill in KiCad: 7 nets appear incomplete but may be connected via zone fills
- **[OPTIONAL]** Verify zone fill in KiCad for 5 zone-connected nets
- **[OPTIONAL]** Analog net: ISENSE_A+ — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: ISENSE_A- — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: ISENSE_B+ — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: ISENSE_B- — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: ISENSE_C+ — analog signal; noise-sensitive, avoid crossing digital signals
- **[OPTIONAL]** Analog net: ISENSE_C- — analog signal; noise-sensitive, avoid crossing digital signals

Routing Status

Metric	Value
Signal Net Completion	82.1 % (32/39)
Overall Completion	82.7%
Complete Nets	43 / 52
Zone-Connected Nets	5
Single-Pad Nets	8 (no routing needed)
Incomplete Nets	9
Unconnected Pads	63

Zone-Connected Nets

- +24V
- +3V3
- +5V
- GND
- VIN

Single-Pad Nets

8 single-pad nets (no routing needed) -- not listed individually.

Unrouted Signal Nets

- ISENSE_A-
- ISENSE_B+
- ISENSE_B-
- ISENSE_C-
- PHASE_A
- PHASE_B
- PHASE_C

Unrouted Signal Nets

- ISENSE_A-
- ISENSE_B+
- ISENSE_B-
- ISENSE_C-
- PHASE_A
- PHASE_B
- PHASE_C

Cost Estimate

Metric	Per Board (estimated)
PCB Fabrication	~3.6 USD
Components (estimated)	~3.17 USD
Assembly (estimated)	~2.35 USD
Total (estimated)	~9.12 USD
Batch Quantity	5
Batch Total (estimated)	~45.61 USD