

SCD LAB 11

Table of Contents

Waleed Abdullah 22i2714 SE-B.....	2
CN-Lab 11	2
Task1	2
Task2	2
Task3	4
Task4	4
Task5	5


Waleed Abdullah 22i2714 SE-B

CN-Lab 11

Task1

Ignored
(Already done)

Task2

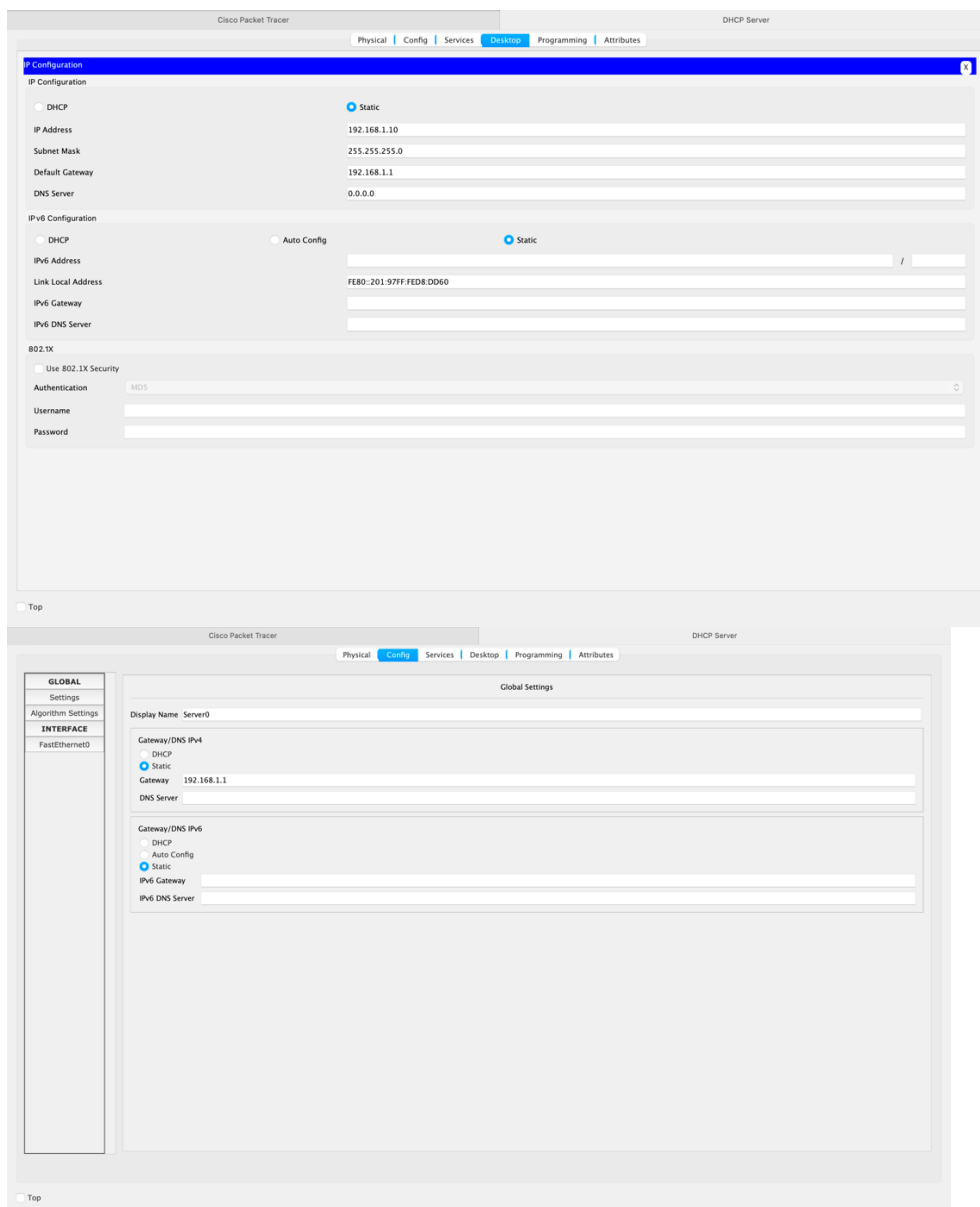

The image displays the Cisco Packet Tracer DHCP Server configuration interface. The top window shows the 'IP Configuration' tab with the following settings:

- IP Configuration:**
 - ☐ DHCP
 - ☒ Static
 - IP Address: 192.168.1.10
 - Subnet Mask: 255.255.255.0
 - Default Gateway: 192.168.1.1
 - DNS Server: 0.0.0.0
- IPv6 Configuration:**
 - ☐ DHCP
 - ☐ Auto Config
 - ☒ Static
 - IPv6 Address: /
 - Link Local Address: FE80::201:97FF:FE08:DD60
 - IPv6 Gateway:
 - IPv6 DNS Server:
- 802.1X:**
 - ☐ Use 802.1X Security
 - Authentication:** MD5
 - Username:
 - Password:

The bottom window shows the 'Global Settings' tab for the DHCP Server:

- GLOBAL:**
 - Settings
 - Algorithm Settings
 - INTERFACE:** FastEthernet0
- Global Settings:**
 - Display Name: Server0
 - Gateway/DNS IPv4:**
 - ☐ DHCP
 - ☒ Static
 - Gateway: 192.168.1.1
 - DNS Server:
 - Gateway/DNS IPv6:**
 - ☐ DHCP
 - ☐ Auto Config
 - ☒ Static
 - IPv6 Gateway:
 - IPv6 DNS Server:

Making two DHCP pools

Cisco Packet Tracer DHCP Server

Physical | Config | **Services** | Desktop | Programming | Attributes

SERVICES

- HTTP
- DHCP**
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP

DHCP

Interface: FastEthernet0 Service: ☒ On ☐ Off

Pool Name: DHCP192

Default Gateway: 192.168.1.1

DNS Server: 192.168.1.10

Start IP Address : 192 168 1 0

Subnet Mask: 255 255 255 0

Maximum Number of Users : 50

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0

Add Save Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
DHCP192	192.168.1.1	192.168.1.10	192.168.1.0	255.255.255.0	255	0.0.0.0	0.0.0.0
serverPool	0.0.0.0	0.0.0.0	192.168.1.0	255.255.255.0	255	0.0.0.0	0.0.0.0

☐ Top

Cisco Packet Tracer DHCP Server

Physical | Config | **Services** | Desktop | Programming | Attributes

SERVICES

- HTTP
- DHCP**
- DHCPv6
- TFTP
- DNS
- SYSLOG
- AAA
- NTP
- EMAIL
- FTP
- IoT
- VM Management
- Radius EAP

DHCP

Interface: FastEthernet0 Service: ☒ On ☐ Off

Pool Name: serverPool

Default Gateway: 10.10.0.1

DNS Server: 192.168.1.10

Start IP Address : 10 10 0 11

Subnet Mask: 255 255 255 0

Maximum Number of Users : 50

TFTP Server: 0.0.0.0

WLC Address: 0.0.0.0

Add Save Remove

Pool Name	Default Gateway	DNS Server	Start IP Address	Subnet Mask	Max User	TFTP Server	WLC Address
serverPool	10.10.0.1	192.168.1.10	10.10.0.11	255.255.255.0	50	0.0.0.0	0.0.0.0
DHCP192	192.168.1.1	192.168.1.10	192.168.1.0	255.255.255.0	255	0.0.0.0	0.0.0.0

☐ Top

Task3

Configuring router

Cisco Packet Tracer Router6 PC0

Physical | Config | **CLI** | Attributes

IOS Command Line Interface

```
Software image at 0x6A0:000: 252.227-7513.
    cisco Systems, Inc.
    170 West Tanager Drive
    San Jose, California 95134-1706

Cisco Internetwork Operating System Software
IOS (tm) PT1000 Software (PT1000-I-M), Version 12.2(18), RELEASE SOFTWARE (fc6)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2005 by Cisco Systems, Inc.
Compiled Wed 07-Apr-05 19:01 by nmnms

PT 1001 (PTSC2005) processor (revision 9x200) with 60416K/3120K bytes of memory
7 processor board ID PPO123 (0123)
PT2005 processor: part number 0, mask 01
Routing software:
  2.3 software, Version 3.0.0.
  4 FastEthernet/IEEE 802.3 interface(s)
  2 low-speed serial type/wireless network interface(s)
  32K bytes of non-volatile configuration memory.
  61488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>configure terminal
Router(config)#
% Invalid input detected at '^' marker.

Router>enable
Router#configure terminal
Router(config)#interface fa0/0
Router(config)#ip address 10.10.0.1 255.255.255.0
Router(config)#ip helper-address 192.168.1.10
Router(config)#no shutdown

Router(config)#if#
%LINE-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
Router(config)#interface fa1/0
Router(config)#ip address 192.168.1.1 255.255.255.0
Router(config)#ip helper-address 192.168.1.10
Router(config)#no shutdown

Router(config)#if#
%LINE-5-CHANGED: Interface FastEthernet1/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up
end
Router#
VTP>=CONF1: Configured from console by console
copy run start
Destination filename [startup-config]?
Building configuration...
[OK]
Router#
```

Command+F6 to exit CLI focus

Copy Paste

☐ Top

Task4

Now selecting dhcp and making request gives successful automatically

Cisco Packet Tracer Router6 PC0

Physical | Config | **Desktop** | Programming | Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static DHCP request successful.

IP Address 10.10.0.11

Subnet Mask 255.255.255.0

Default Gateway 10.10.0.1

DNS Server 192.168.1.10

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address

Link Local Address FE80::260:5CFF:F5E2:756E

IPv6 Gateway

IPv6 DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

Task5

Pinging from one pc to another via DHCP and also to the gateway

Cisco Packet TracerPC1PC0

Physical | Config | Desktop | Programming | Attributes

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.3: bytes=32 time=1ms TTL=127
Reply from 192.168.1.3: bytes=32 time=1ms TTL=127
Reply from 192.168.1.3: bytes=32 time=1ms TTL=127

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=1ms TTL=127
Reply from 192.168.1.3: bytes=32 time=1ms TTL=127
Reply from 192.168.1.3: bytes=32 time=1ms TTL=127
Reply from 192.168.1.3: bytes=32 time=1ms TTL=127

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time=1ms TTL=255
Reply from 192.168.1.1: bytes=32 time=1ms TTL=255
Reply from 192.168.1.1: bytes=32 time=1ms TTL=255
Reply from 192.168.1.1: bytes=32 time=1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 3ms, Average = 1ms

C:\>
```

☐ Top