


Ten feet is a sensible target—not yet a proven fit.

Your brief is storage and prep, a daily round table, and just two tucked stools. The open table-and-chair area is the limiting factor.

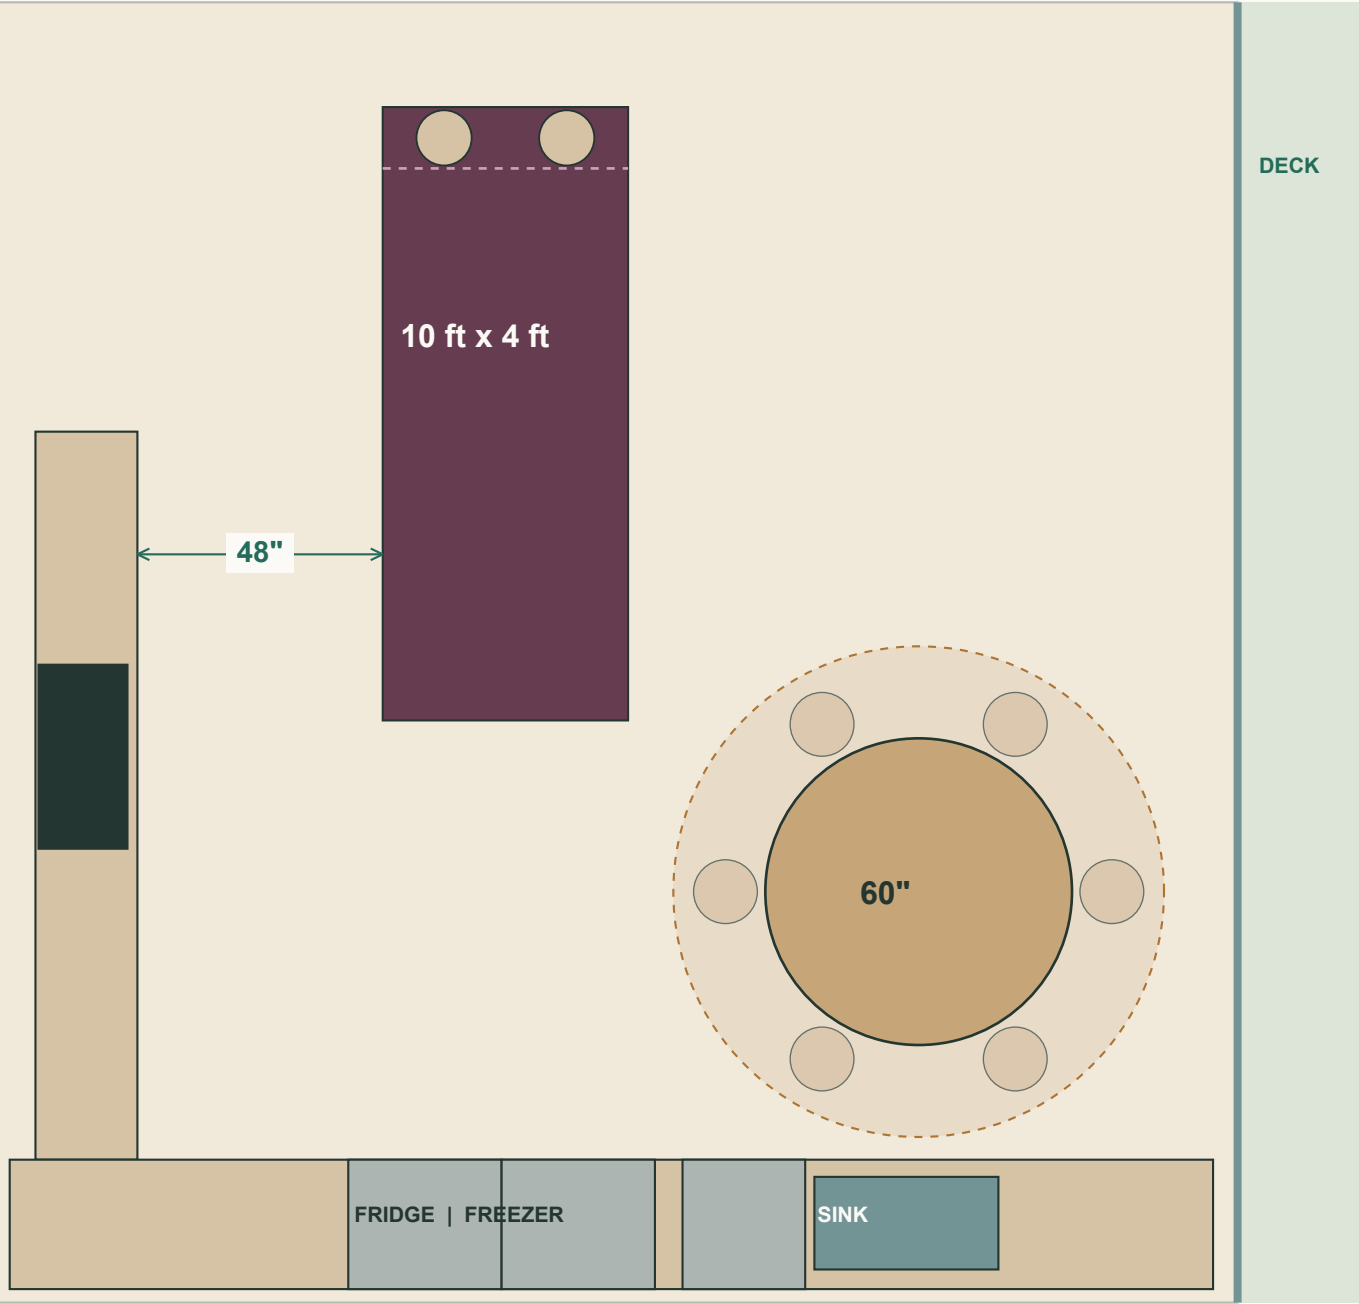

Current model footprint / 60" table / assumed 18" occupied-chair band

My recommendation

Keep 10 feet as the upper target while the cabinet plan is resolved. Test a 54-inch table first. If six occupied chairs plus easy sink/deck movement are non-negotiable, compare a 9-foot island; do not approve cabinetry from the current model.

What the 10-foot island does well

About 40 square feet of top, substantial storage and a nominal 48-inch cooking-side aisle. It is 4 feet 3 inches shorter than the former run. Its length is serving prep/storage, not a need for more stools.

What the present model does poorly

At the 60-inch table, the nominal edge-to-sink-counter gap is only 22.4 inches; edge-to-deck room line is 32.4 inches. Chairs make both tighter. Shortening only the island cannot fix those two distances.

The fridge move is a layout concept


The pair is clear of the corner in the current tour. Final appliance door swings, drawers, ventilation, landings and the south-wall window elevation still need shop-drawing checks.

Primary sources: Owner's Aug. 31 sent emails; current Sept. 25 model coordinates. Existing prior study used a simplified table location; this analysis replaces its fit figures.

Codex design analysis | September 25, 2026 | Dimensions are drawing/model based, not field verified. Not for construction.

What another foot actually buys you.

Same living-facing end, same 4-foot width, same 60-inch table center. Shortening occurs at the table end, as in the current model.

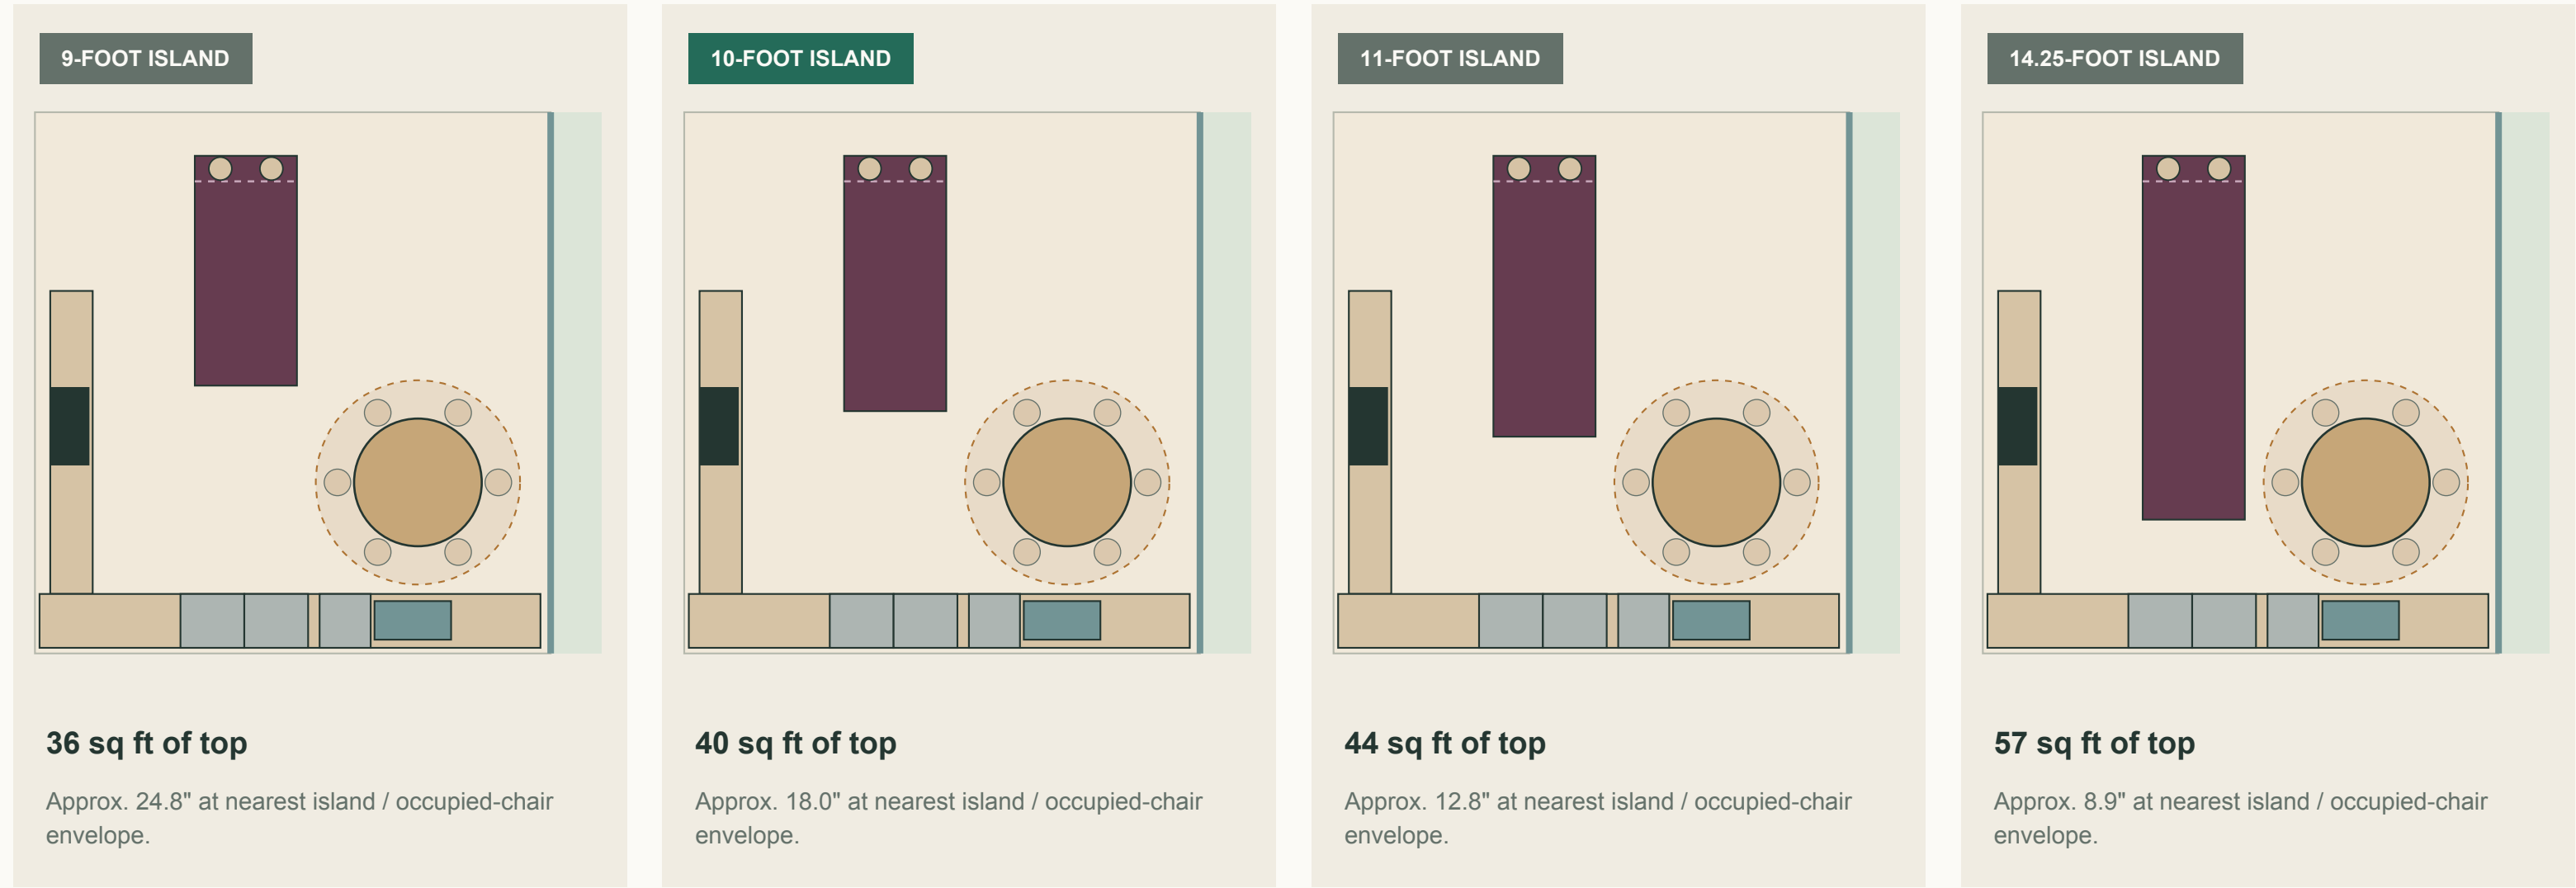

LENGTH	FIT CONSEQUENCE	READING FOR YOUR BRIEF
9 ft	Adds 12" longitudinal space at table end; 36 sq ft top	Useful fallback if the occupied-table mockup makes 10 ft feel crowded.
10 ft	40 sq ft top; current intended size	Good prep/storage provision, but table/sink pinch still unresolved.
11–14¼ ft	More top; progressively less table-end relief	Little support in your two-stool brief; not my recommendation.


Calculated from the model. Chair band is an illustrative 18" beyond the tabletop, not a selected chair or an accessibility test. Diagonal gaps are not aisle widths.

Codex design analysis | September 25, 2026 | Dimensions are drawing/model based, not field verified. Not for construction.

The table is the harder part of the kitchen.


A smaller table helps. It does not magically create a full circulation lane between every seated person, the island and the sink.

CURRENT / 60"

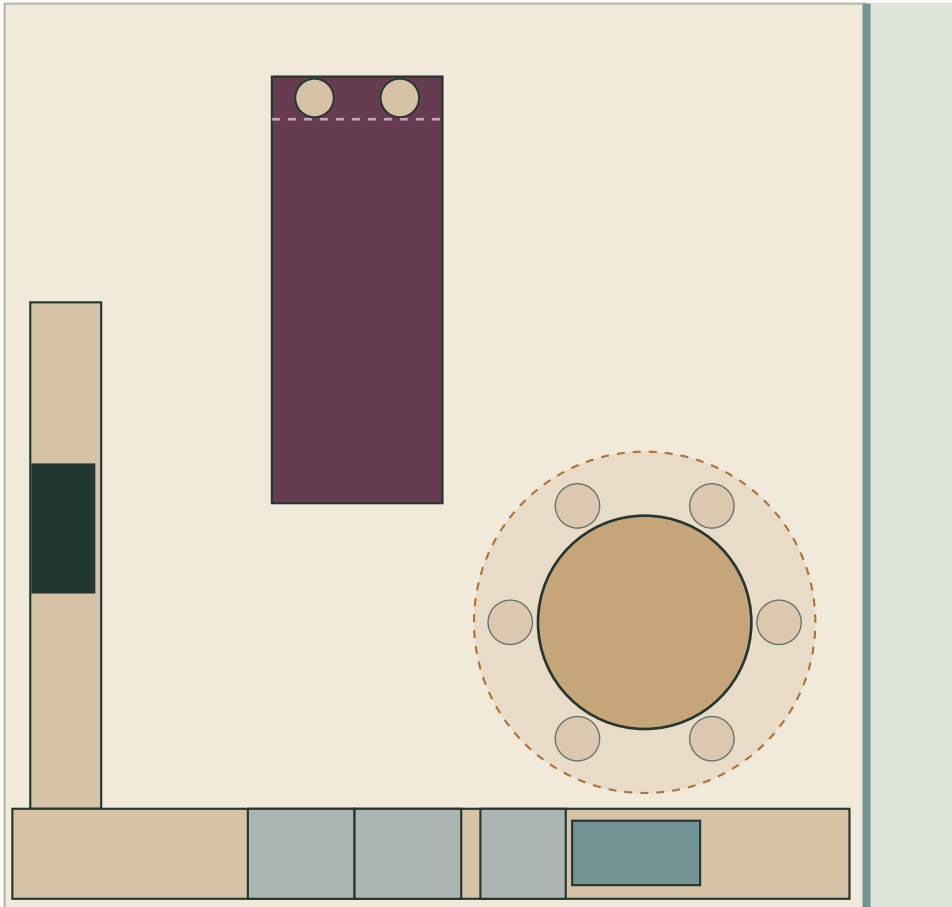

EDGE TO...	NOMINAL GAP
Deck room line	32.4"
Sink counter	22.4"
Nearest island corner	36.0"

TEST / 54", REPOSITIONED

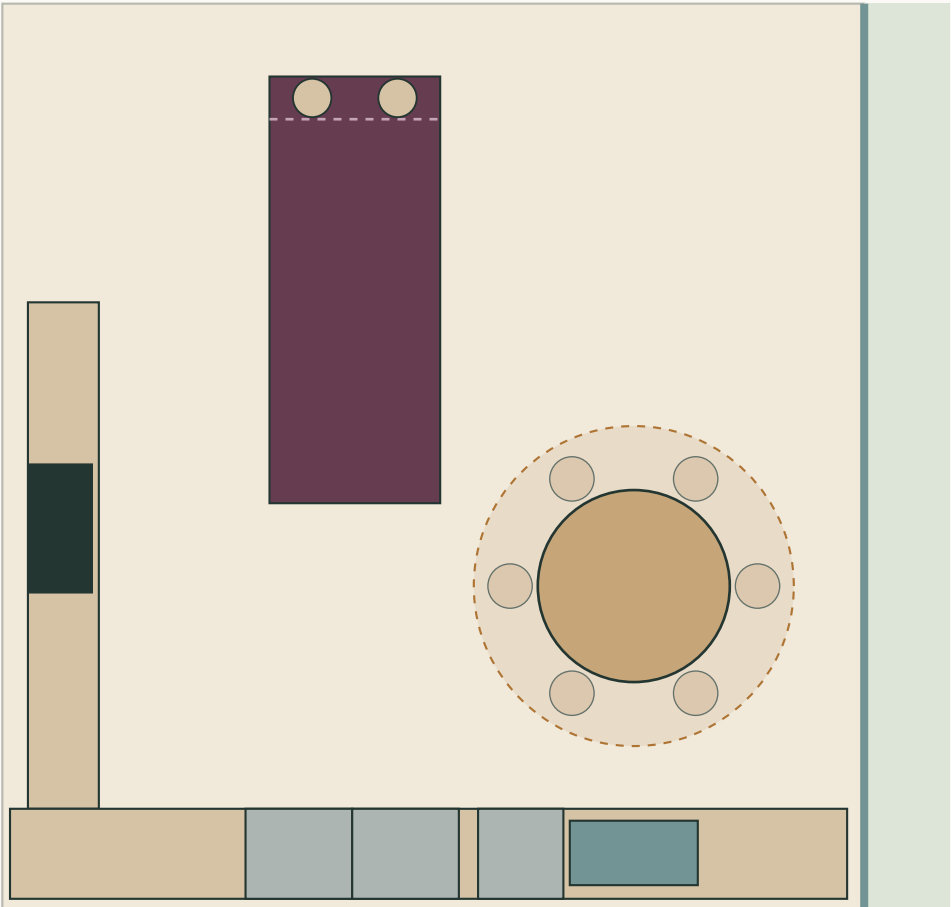

EDGE TO...	NOMINAL GAP
Deck room line	37.8"
Sink counter	35.6"
Nearest island corner	32.2"

Read the numbers correctly

These are tabletop-edge distances. Subtract the assumed 18-inch occupied-chair depth to estimate the remaining gap. Finished frames, pulls and real chairs may reduce it further.

The 54-inch test is more balanced



Moving the table 2.4 inches away from the deck and 10.2 inches toward the living room gives roughly 32–38 inches to nearby boundaries. That is seating space, not a generous route behind every diner.

For six seats, test actual chairs

A 54-inch circle gives about 28 inches of arc per person; chair shoulders and pedestal legs still determine comfort. Slim armless chairs are a better test than bulky upholstered ones.

Two perches are different from a dining bar.

Keep the island focused on useful storage. Be candid about what the shallow seating lip can—and cannot—offer.

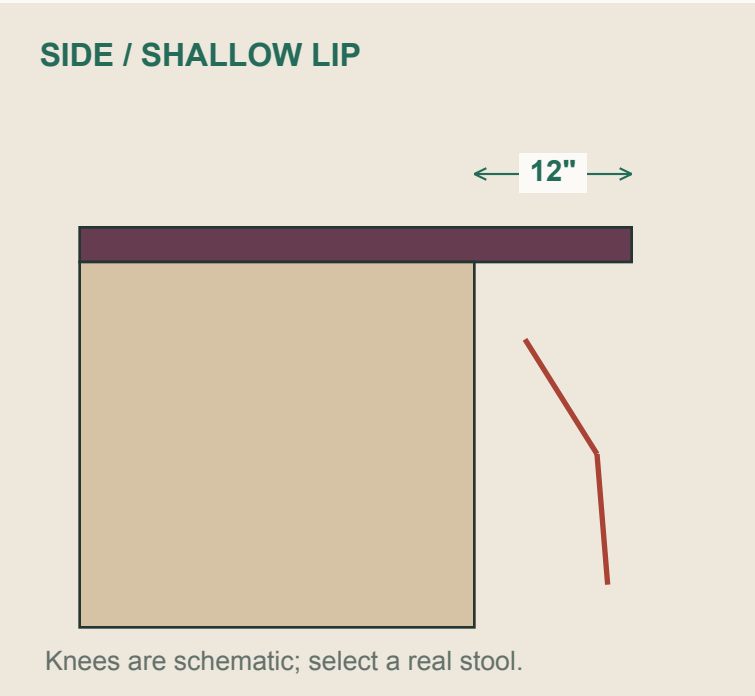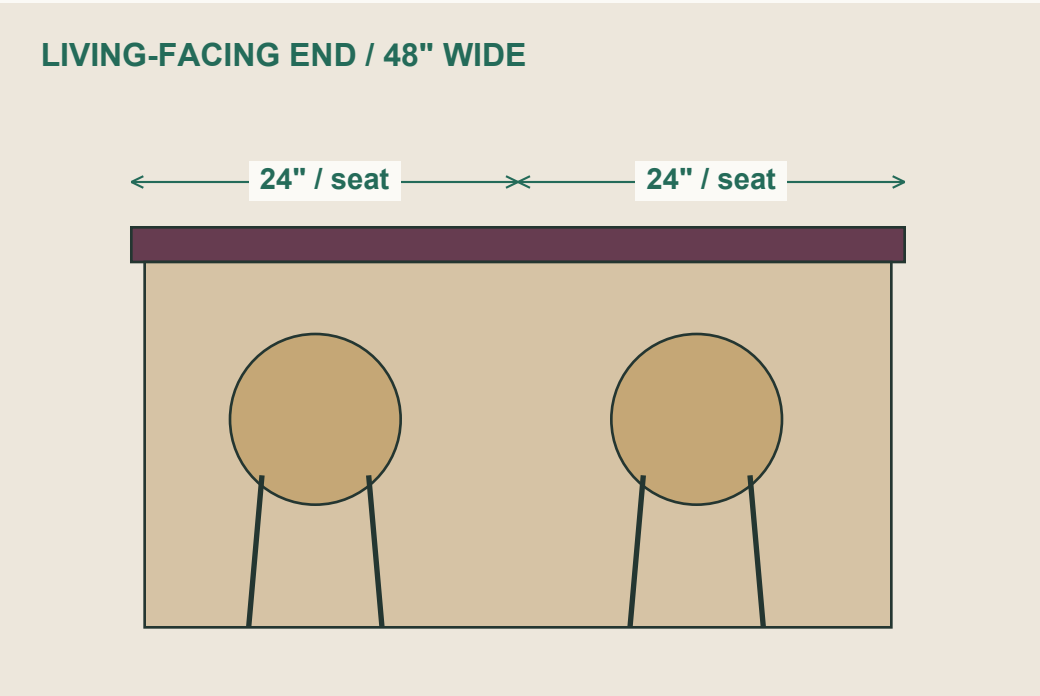

Keep the brief, name the compromise

Your sent instruction is a 9–12-inch lip, two tucked stools and no full bar. At counter height, that is an occasional perch; it should not be treated as two full meal seats.

Storage should decide the modules

Use deep drawers for prep tools and serving pieces. A 24-inch wine refrigerator is optional; it competes with drawer capacity and needs door, ventilation and electrical coordination.

Resolve structure before stone

The fabricator and cabinet maker must detail the cantilever and supports. Do not infer stone support from the rendered cabinet box.

Planning benchmarks—not a local code determination

The NKBA guide reviewed recommends 42-inch work aisles for one cook, 48 for multiple cooks and 36-inch walkways. At dining seats, it distinguishes 32 inches with no passing, 36 to edge past and 44 to walk past. Counter-height seating is typically 24 inches wide with 15 inches of knee depth.

Source: NKBA Kitchen Planning Guidelines, sections 6–9 (pre-2023 edition hosted by its Puget Sound chapter). These ergonomic reference values support the comparison; they do not approve this layout.

Make the final call with occupied space, not a ruler alone.

Independent conclusion: 10 feet is plausible for your storage needs, but the current six-seat table arrangement is not ready for release.

PRIORITY	WHAT I WOULD DO	TRADEOFF
Prep + storage first	Start with 10 × 4 ft and the 54" balanced table test.	Accept that seated dining and sink/deck traffic cannot all be generous at once.
Six daily diners + easy movement	Test 9 ft immediately; keep an 8 ft diagnostic option in the floor mockup.	Less top/storage. Nine feet helps, but by itself does not guarantee full passing clearances.
A generous 60" table	Retain it only after a new dimensioned furniture plan proves the seated layout.	The present table is too close to the sink counter; island length alone is not the cure.
Two stools	Keep two at the living end; mock up the 9–12" lip.	Treat as perches or deliberately deepen the knee space; do not silently change the brief.

| What the sensitivity test says

With a 54-inch table, a simplified grid search can fit 44 inches to sink/deck and 32 inches to the nearest island corner at an 8-foot island. It did not find that combination at 9 or 10 feet within the tested kitchen region. This is a geometric diagnostic—not a recommendation to order an 8-foot island or proof of a complete working kitchen.

| One useful layout session

Tape the island and table full size. Place six actual chairs, open the dishwasher and fridge, have one person prep while another goes to the deck, and try both stools. Then set cabinet modules and lighting centers.