



Pins PIN_B3 and PIN_A4 swapped
in order to supply SDA/SCL for 8
pin DIP 24C256

J1
ZIF Device Under Test

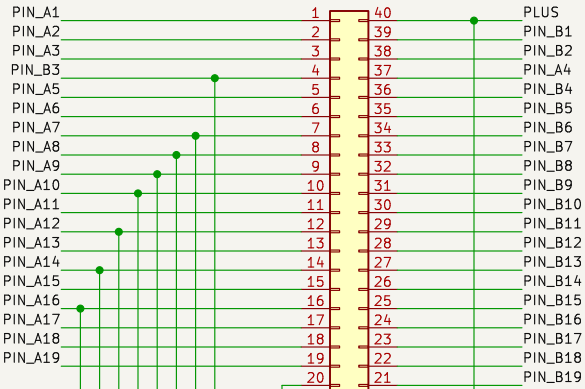


R20
100k


A 24-pin device can be handled by
a single PICO by jumpering JP1...JP3
Software detects serial loopback.



SW1
SW_SPDT




U2
Secondary

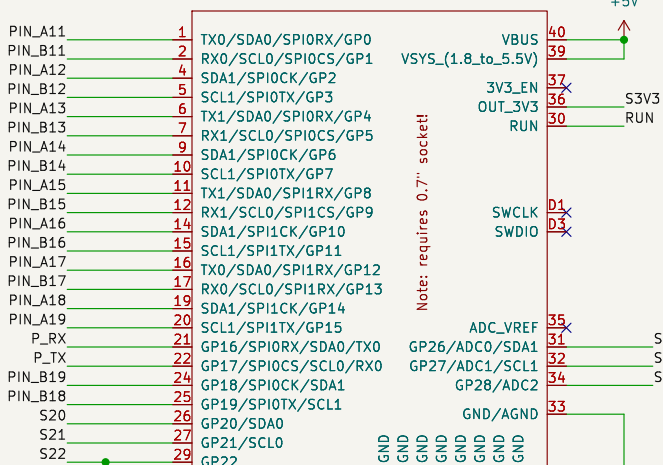

Note: requires 0.7" socket!

On the secondary, GP22 is
pulled low (it's pulled high
on the primary).

U1
Primary

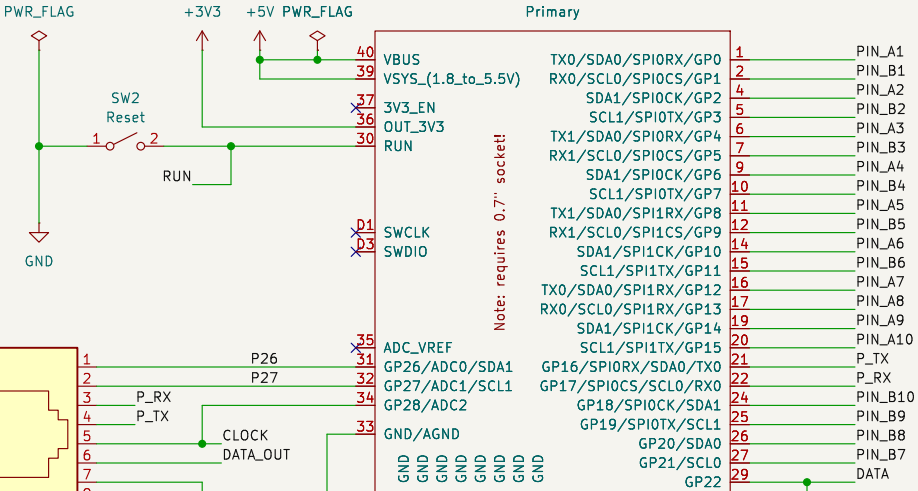

On the primary, GP22 is
pulled high (it's pulled low
on the secondary).