

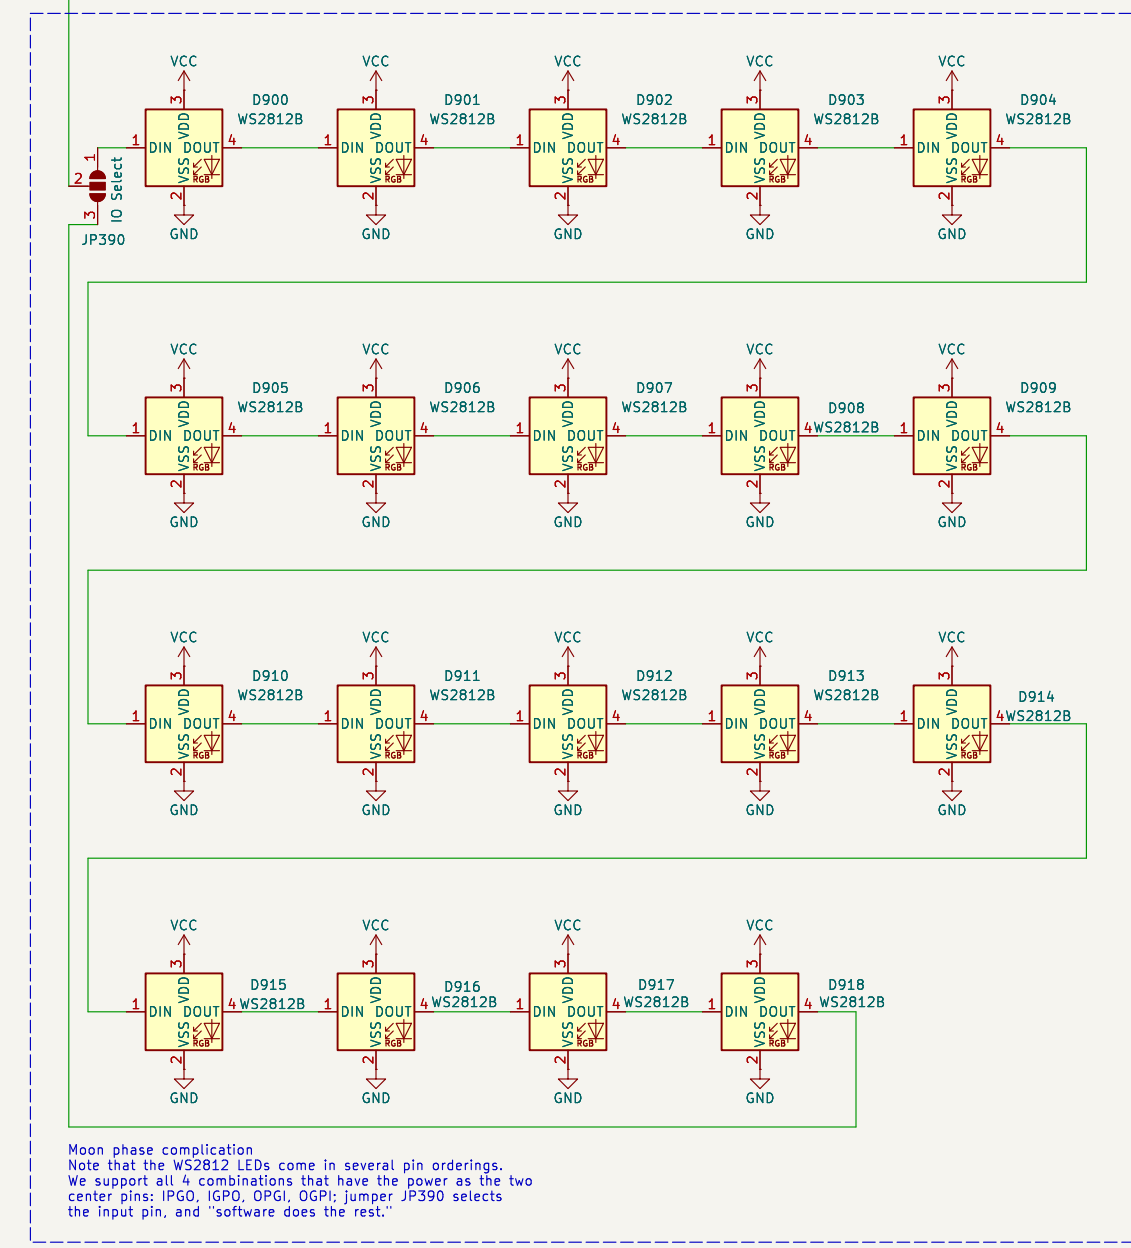
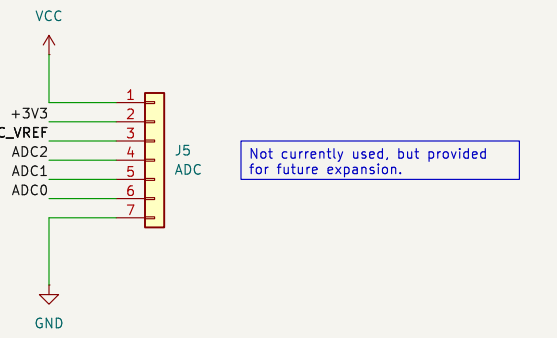
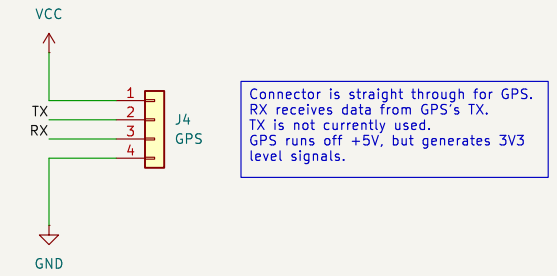
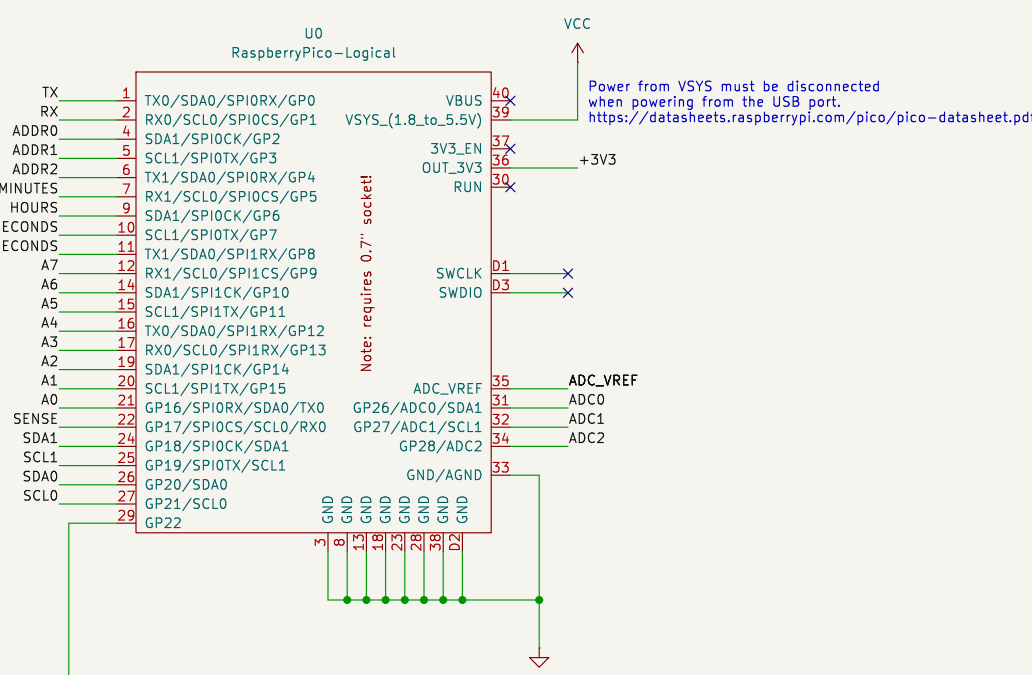
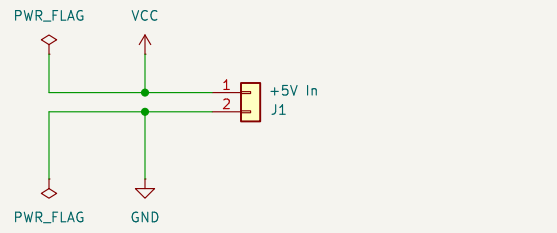
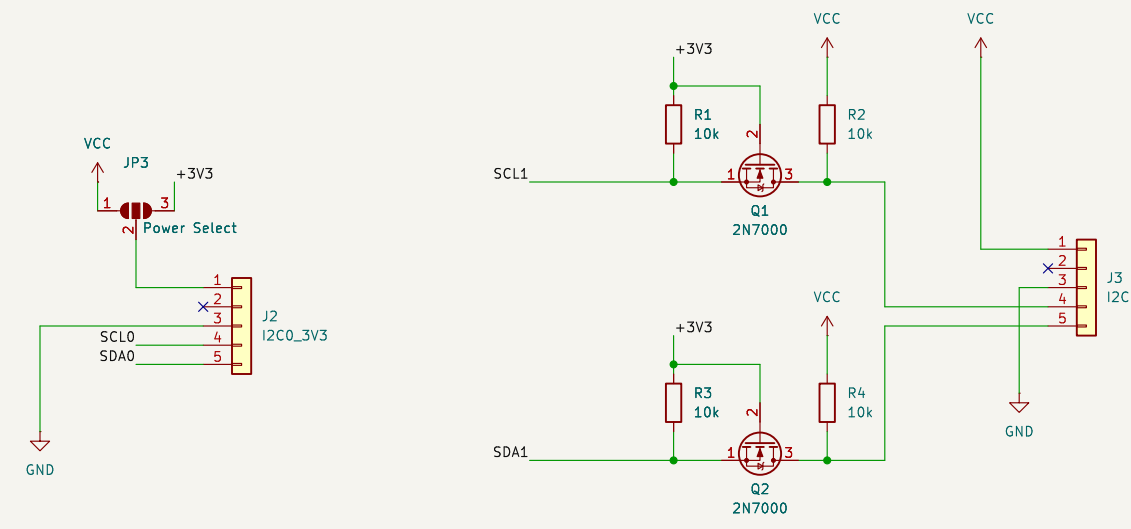
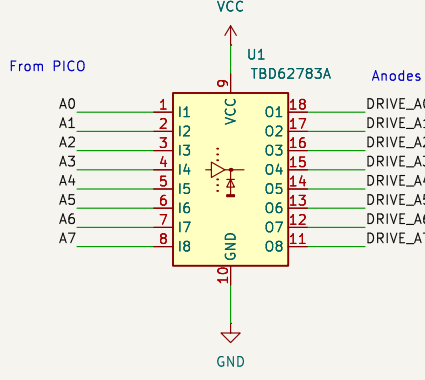


For all LEDs: note the "snake" pattern of reference numbers!

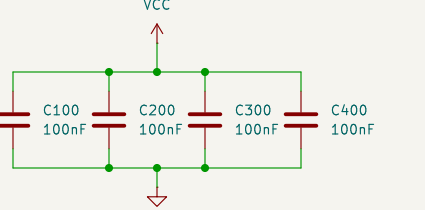

Moon phase complication
Note that the WS2812 LEDs come in several pin orderings. We support all 4 combinations that have the power as the center pins: IPGO, IGPD, OPGI, OGPI; jumper JP390 selects the input pin, and "software does the rest."

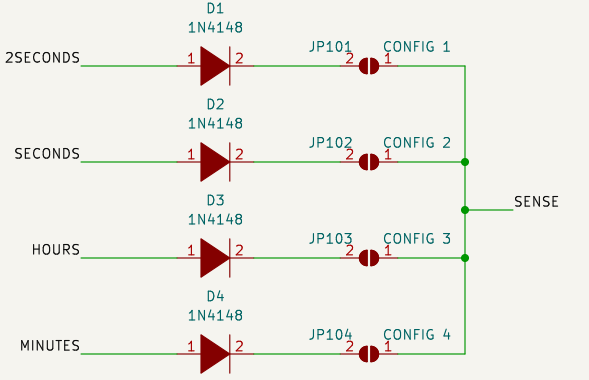

I2C Section
We provide a 3V3 I2C and a 5V level-translated I2C.
Pin 2 is N/C so as to match IKCH46-series of LED display boards