



Indoor Model | LSBB012

LG LED CONFIGURATION

LED Configuration Rendering

Indoor Model | LSBB012

LG LED CONFIGURATION

Screen Specification

Indoor Model | **LSBB012**

Display Requirements	Screen configuration (WxH)	20x20
	No. of Cabinets	400
	No. of Spare Modules	8
Display wall dimensions	LED Module Dimensions	12 × 6.75 m
	Display Area	81 m²
	Diagonal	542.05 inch
Optical Parameter	Resolution	9,600 × 5,400
	No. of Controller	9
Power consumption	Max	48,000 W
	Average	16,000 W
Heat Dissipation	Max	163,600 BTU
	Average	54,400 BTU

LG LED CONFIGURATION

Product Specification


Indoor Model | LSBB012

Physical Parameters	Pixel Configuration	Single SMD
	Pixel Pitch(mm)	1.25
	Module Resolution (WxH)	120 X 270
	Module Dimensions(WxH:mm)	150 X 337.50
	Weight per Module (kg)	0.50
	No. of Modules per Cabinet (WxH)	4 X 1
	Cabinet Resolution (WxH)	480 X 270
	Cabinet Dimensions (W x H x D, mm)	600 X 337.50X56
	Cabinet Surface Area (m ²)	0.20
	Weight per Cabinet (kg/unit)	6.90
	Weight per Square Meter (kg/m ²)	35
	Physical Pixel Density (pixels/m ²)	640000
	Flatness of Cabinet (mm)	±0.5
	Cabinet material	Die-casting Aluminum
	Service access	Front
Optical Specifications	Max Brightness (After Calibration, nit)	600
	Color Temperature (K)	3200-9300
	Visual Viewing Angle (Horizontal)	160
	Visual Viewing Angle (Vertical)	140
	Brightness Uniformity	97%
	Color Uniformity	±0.003Cx,Cy
	Contrast Ratio	5000:1
	Processing Depth (bit)	16 (HDR10, HDR10 Pro)
Electrical Specifications	Power Consumption (W/Cabinet, Max.)	120
	Power Consumption (W/Cabinet, Avg.)	40
	Power Consumption (W/m ² , Max.)	600
	Heat Dissipation (BTU/h/Cabinet, Max.)	409
	Heat Dissipation (BTU/h/Cabinet, Avg.)	136
	Heat Dissipation (BTU/h/m ² , Max.)	2047
	Power Supply (V)	100 to 240
	Frame Rate (Hz)	50 / 60
	Refresh Rate (Hz)	3840
Operation Specifications	LED Lifetime (Half brightness)	100000
	Operating Temperature(°C)	-20 to 40
	Operating Humidity	10-80%RH
	IP rating Front	IP50
	IP rating Rear	IP50
Certification		CE, FCC, cTUVus, CB
Environment		RoHS, REACH
Controller		CVBA
90 degree corner cut		X

* Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage

LG LED CONFIGURATION

Power Flow(110v) : Multiple Rows Cabinets

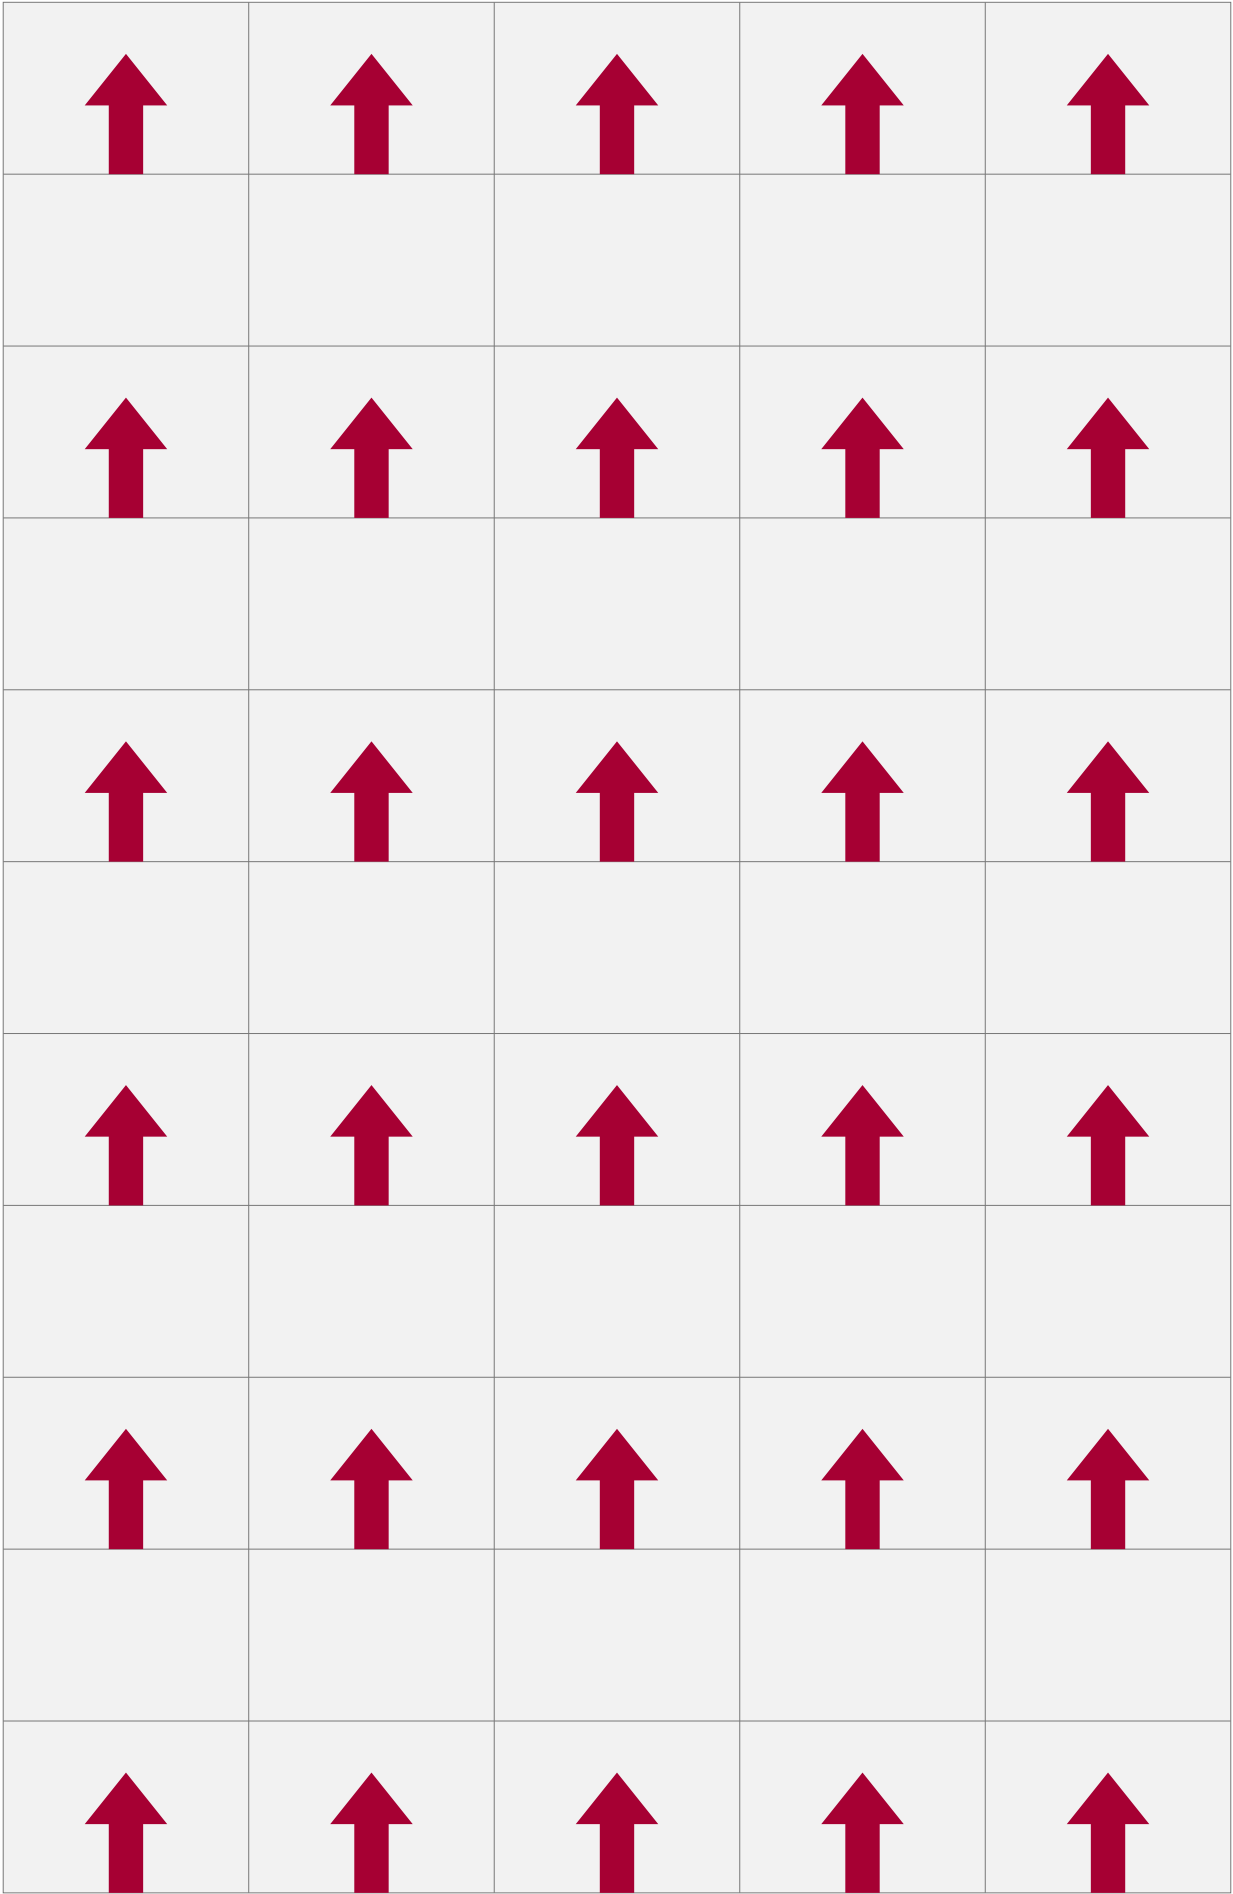

Power Flow(220v) : Multiple Rows Cabinets

Data Flow : Multiple Rows Cabinets



LSBB012

Fine-pitch Essential Series

[View Detail >](#)