Engineering Change Notice(ECN)

ECN-D-2604-11

(Buffer jig change from 300.3mm to 301mm)

FA Research ME 1 Team

Written	Review	Confirm
김정현 프로	주성진 팀장	이태경 본부장
04/22	04/22	04/22

NINEBELL

1. Engineering Change Request

NINEBELL	설계 변경 요청서(ECR) (Engineering Change Request)			Customer	ACM
				ECR No.	ECR-Q-0000-00

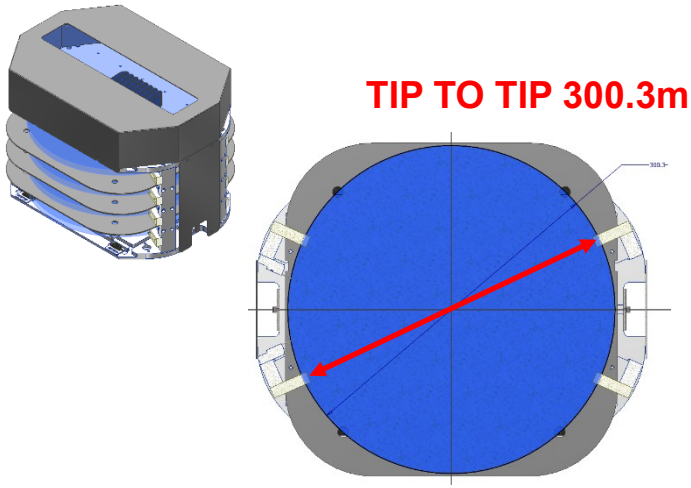
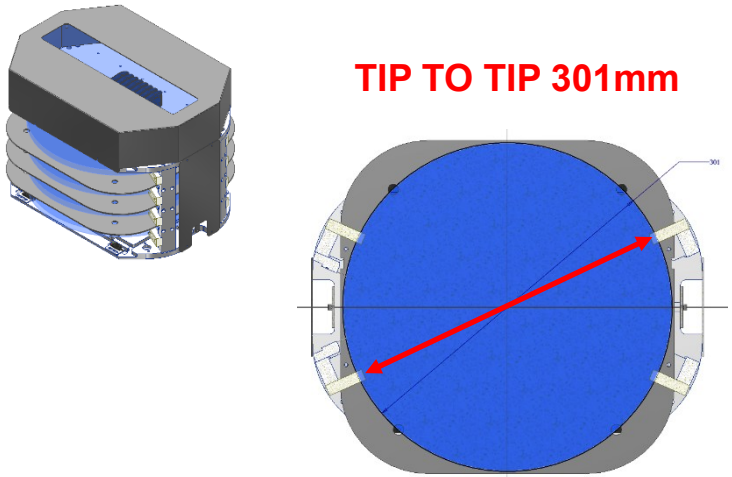
Requesting department	Name / Department	JiaJun/Service	변경 사유	☑ Customer Request ☐ Cost Reduction ☑ Quality improve ☐ Work Efficiency ☐ Discontinued Part ☐ 기타
	Date	2026-03-14		

Request project	Category	Project Type	변경 Level (Change Level)		
	☑ MP ☐ ES	Buffer		☐ Level 1	Design structure changes are required
				☑ Level 2	Simple part and work method change

Before(Problems and Change Requests)	After(Expected Effect)
Problems: The gap between wafer and buffer tips is a litter small when we use 300.3mm buffer jig to adjust buffer tips. In this instance, robot maybe put the wafer on buffer tips. Request: Change the buffer jig from 300.3mm to 301mm, and use the 301mm buffer jig to adjust buffer tips from now.	Expected Effect: ACM will use 301mm buffer jig to adjust all existing buffer, and the 301mm buffer jig will be applicated in NB factory.

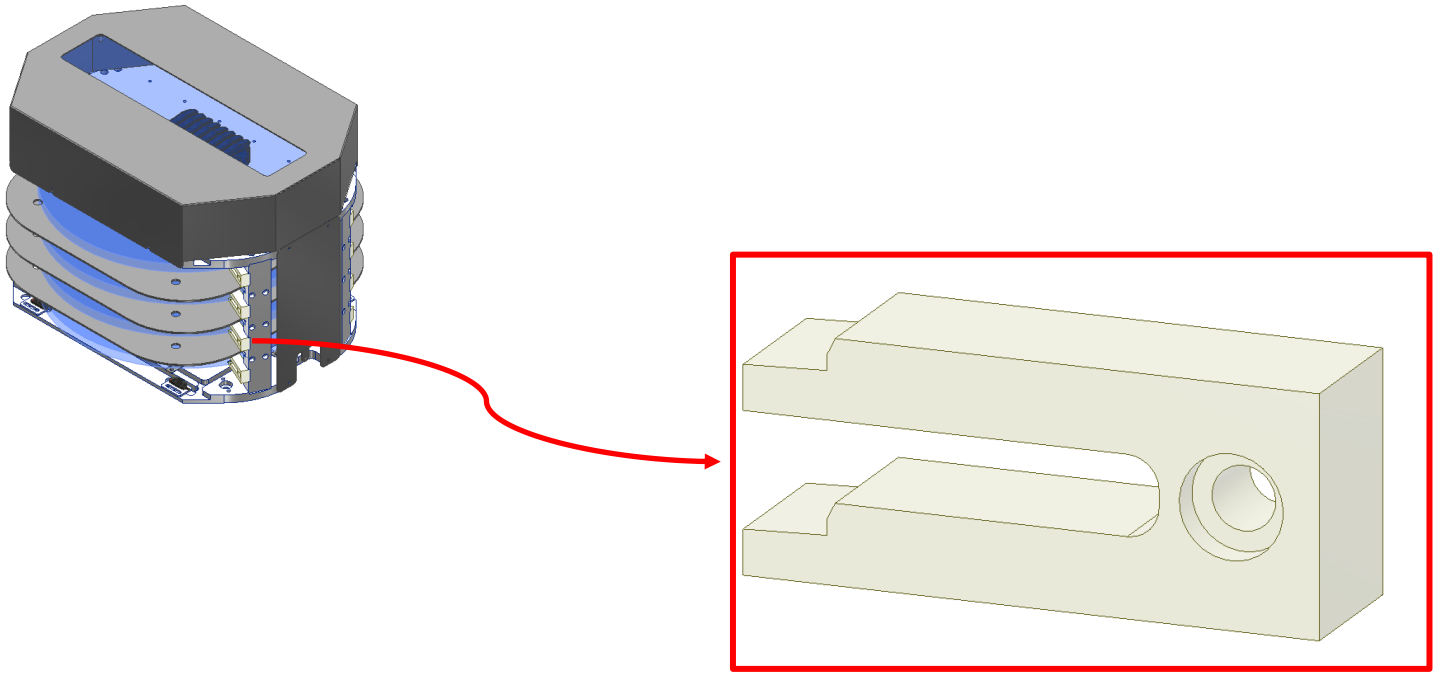
Related Division			Potential Issue		
	☐	Mechanical design		☐	Instrument & tool additional cost incurred
	☐	Electrical design		☐	Work process change and work time
	☑	Manufacturing		☑	Mechanical failure
	☐	Purchasing & Materials		☐	ETC :
	☐	Quality			

2. Engineering Change Notice

적용 장비 타입 Applicable project type	Buffer (All)	적용 범위 Scope	■ 신규 발주분 (New order) □ 기발주분 (Previous order) □ 기출하장비 (Existing shipped equipment)
변경 사유 Reason for change	■ 고객 요청 (Customer request) ■ 품질개선 (Quality improve) □ 원가절감 (Cost reduction) □ 생산성 향상 (Increase productivity) □ 부품 단종 (Part discontinuation) □ 기타 (ETC)	ECR NO. ECN NO.	ECR-S-2603-06 ECN-D-2604-11
변경 상세 사유 Detailed reason for change	The gap between wafer and buffer tips is a litter small when we use 300.3mm buffer jig to adjust buffer tips. In this instance, robot maybe put the wafer on buffer tips.		
변경 사항 Changes	변경 전(Before)	변경 후(After)	
			
상세내용 Detail	웨이퍼 측면에 닿는 버퍼 tip간격 300.3mm The spacing between the buffer tips that contact the wafer edge is 300.3 mm.	웨이퍼 측면에 닿는 버퍼 tip 간격 301mm The spacing between the buffer tips that contact the wafer edge is 301 mm.	

CONFIDENTIAL

3. Engineering Change Notice

전체 이미지 Full Image	 ※변경 위치 혹은 관련 위치 표시 ※Show changes or related positions

유효성 검토 결과 Test Result	검토 여부 Test or not	Y / N	유효성 검토 부서 Department	N/A	고객 승인 여부 Customer approval	Y / N
승인 날짜 Approval date	1. Ninebell : / / 2. Customer : / /		나인벨 승인 Ninebell approval	QC 2026.04.29 PASS	고객사 승인 Customer approval	ACM confirm 5/13/26 JunJia
적용 일자 Effective date	2026/05/20~(PO)		최초 적용 장비 Initially Applied Equipment	NEW PO		

4. Attachments

Part No.			
PJT	Before	→	After
8CH FS	N8P-B00M1-2	→	N8P-B00M1-3
8CH BS	XP-B14M6-2	→	XP-B14M6-3
	XP-B14M6-2_MIR	→	XP-B14M6-3_MIR
	XP-B13M6-2	→	XP-B13M6-3
	XP-B13M6-2_MIR	→	XP-B13M6-3_MIR
12CH	CM0SP-BV11-M004-0	→	CM0SP-BV11-M004-1
12CH HIZ	S8P-B00M1-1	→	S8P-B00M1-2
18CH	18P-B00M4-1	→	18P-B00M4-2
12CH BS	CM07P-B140-M004-1	→	CM07P-B140-M004-2
	CM07P-B140-M004-1_MIR	→	CM07P-B140-M004-2_MIR
	CM07P-B130-M004-1	→	CM07P-B130-M004-2
	CM07P-B130-M004-1_MIR	→	CM07P-B130-M004-2_MIR

CONFIDENTIAL