

Technical Specifications

Clinical Application

- Latest software for Abdomen, Gynecology, Obstetrics, Small Organs, Heart, Lung, Thyroid, Nerve, MSK, TCD, Brain, Vessels, Cardiac, Nerve, Urology, Pediatric, Neonatal, Anesthesia, Echo, Vascular, Superficial & Intra-operative applications

System Technical standards

- State-of-Art latest laptop design fully digital Color Doppler with 15.6" high resolution 1980x1020 medical grade flicker free LED monitor with 180 degree open angle & 80 degree wide viewing angle
- 10.1" sanitizable & splash resistant Touch Console with gesture control, QWERTY alphanumeric keyboard, virtual TGC sliders & trackball
- Single probe active connector, can be extended up to 3 ports through Multiple Transducer Connector (MTC) with easy switching
- Built-in rechargeable battery with 2 hours backup
- Enhanced needle visualization & recognition software
- Facility for high definition digital acquisition, reviewing and editing of complete patient studies
- User programmable multiple presets: copy, delete, save as & rename, Exam protocols, Thumbnail view
- Support JPEG, BMP, FRM image formats and CIN, AVI, WMV movie format & Flash Memory
- Complete package for general measurement & calculations for B, M & Doppler Modes
- Capability for digital storage & retrieval of images (B/W & Color) and clips with data transfer facility & image archiving
- Auto Transmit Focus and Dynamic Receive Focus
- 10x zoom magnification in real-time & frozen modes with PAN facility
- Support DICOM 3.0 connectivity & interfability to PACS & RIS
- Unit and probes are sturdy, rugged and drop safe against accidental falls and drops
- Unit is upgradeable to next generation system onsite
- PC connectivity

Supported Multi-frequency Latest Broadband Transducers (Provided on demand)

- Convex (2-5MHz), Linear (4-12MHz), HF Linear (6-19MHz), Transvaginal (4-9MHz), Micro-convex (5-8MHz), Hockey Stick (7-17MHz), Phased Array Cardiac - Adult (1-5 MHz), Volume Convex (2-6MHz) probe etc
- Frequency Range : 1 ~ 19 MHz; Probe elements: 128, FOVTV probe: 210 degree

Imaging Modes & Features

- B mode, M mode, CFM, Color Doppler, Color M, Power Doppler Imaging (PDI), Directional PDI, Color PD, Chroma color, PW, CW
- Duplex, Triplex, Quad imaging, HPRF, Anatomical M mode, Auto NT
- Auto One-Key Image Optimisation
- Adaptive Spatial Compound Imaging in real-time
- Adaptive Speckle Reduction Imaging
- Inverse harmonic imaging technique
- Tissue Harmonic Imaging (THI)
- Tissue Doppler Imaging (TDI)
- Tissue Adaptive Imaging
- Panoramic Imaging
- Trapezoidal Imaging
- IMT-Internal Median Thickness
- Digital Multi-Beam forming
- B Steer, M Steer
- Auto Doppler Trace & measurement
- Transducer Temperature Detection
- Phased Inverse Harmonic Imaging
- 3D/4D Imaging

System parameters

- Gray Scales ≥256; Gain: 0-255dB; Digital channels: 11,05,920; Auto & selectable Gain control; Digital calipers
- Cine loop: 1,00,000 frames for B mode, 35,000 frames for color mode, 180s for M mode, 240s for PW/CW mode
- Scanning depth: 1-45cm (depends upon type of probe); Dynamic Range: up to 320dB, Variable sample volume size: 0.5 - 20 mm
- 500G solid state disk; 8 step TGC; 8 step LGC, Boot up time: <30 secs, Frame rate: 1000 fps
- Power Supply: 100-240V AC, 50/60 Hz single phase fitted with Indian plug & Resettable over-current breaker
- I/O ports: USB 3.0 ports - 2, S-video - 1, HDMI - 1, Ethernet / LAN - 1, DVI - 1
- Operating Temp.: 0-50 degree C, Relative Humidity: 15-90%
- Size: 375 x 380 x 58 mm (LxBxH). Weight: 4.5 kg (with battery)

Features & Accessories (On Demand)

- Biopsy Guide (reusable)
- B/W Thermal Printer
- Color Laser Printer
- External CD / DVD drive
- Trolley / Cart
- UPS
- MTC



Uttrakhand

09639060683

Delhi

08090075719

Lucknow

09792444111

Mumbai

09452010000

Bangalore

08948122222

Guwahati

09415937232

Hi-End Portable Color Doppler Ultrasound



Trolley (Optional)



DIGI 1100 CD PRO

24x7 HELPLINE
09838202281

Overseas

Dubai Office: P.O. Box 922, Dubai, U.A.E. Ph: # 0097-1504967258	U.S.A. Office: 287 Stillwater Drive, Yuba City, CA 95991 Ph: # 415 407 5108	U.K. Room No. 004A, Central Village, Block A, Woodhouse Lane, Leeds, LS2 3AB Ph: # 0044-7795536498

Business Portfolio

Human Equipments

Veterinary Equipments

BMW Management

Hospital Furniture

OptiMaser®

Swachh Lab™

PSA Oxygen Generator



Mfd. & Mktd. in India by:

S S Medical Systems (I) Pvt. Ltd.

Manufacturing License No. MFG/MD/2024/000438



Mfd. & Mktd. in India by :

S.S. MEDICAL SYSTEMS (I) PVT. LTD.

Manufacturing License No.: MFG/MD/2024/000438 | Class-I Local Supplier

Manufacturing Unit : #2, Bhimtal Industrial Estate, Bhimtal, Nainital, Uttarakhand-263136 | Tel: +91 5942 248138, Mob: 08939022234


National Sales Office: Delhi Blue Apartments, G-3 Ground Floor, Factory Road - 2,

Near Safdarjung Hospital, Ring Road, New Delhi-110029 | Tel: +91 11 41060439, 08090075719

Email: info@ssmedworld.com Website: www.ssmedworld.com


Due to continuous research & development, images shown in this catalogue is only for depiction, however actual product may slightly differ from the images shown here.

This is our standard product catalogue, however, if required, the detailed technical data sheet can be submitted on demand.



DIGI 1100 CD PRO

Hi-End Portable Color Doppler Ultrasound

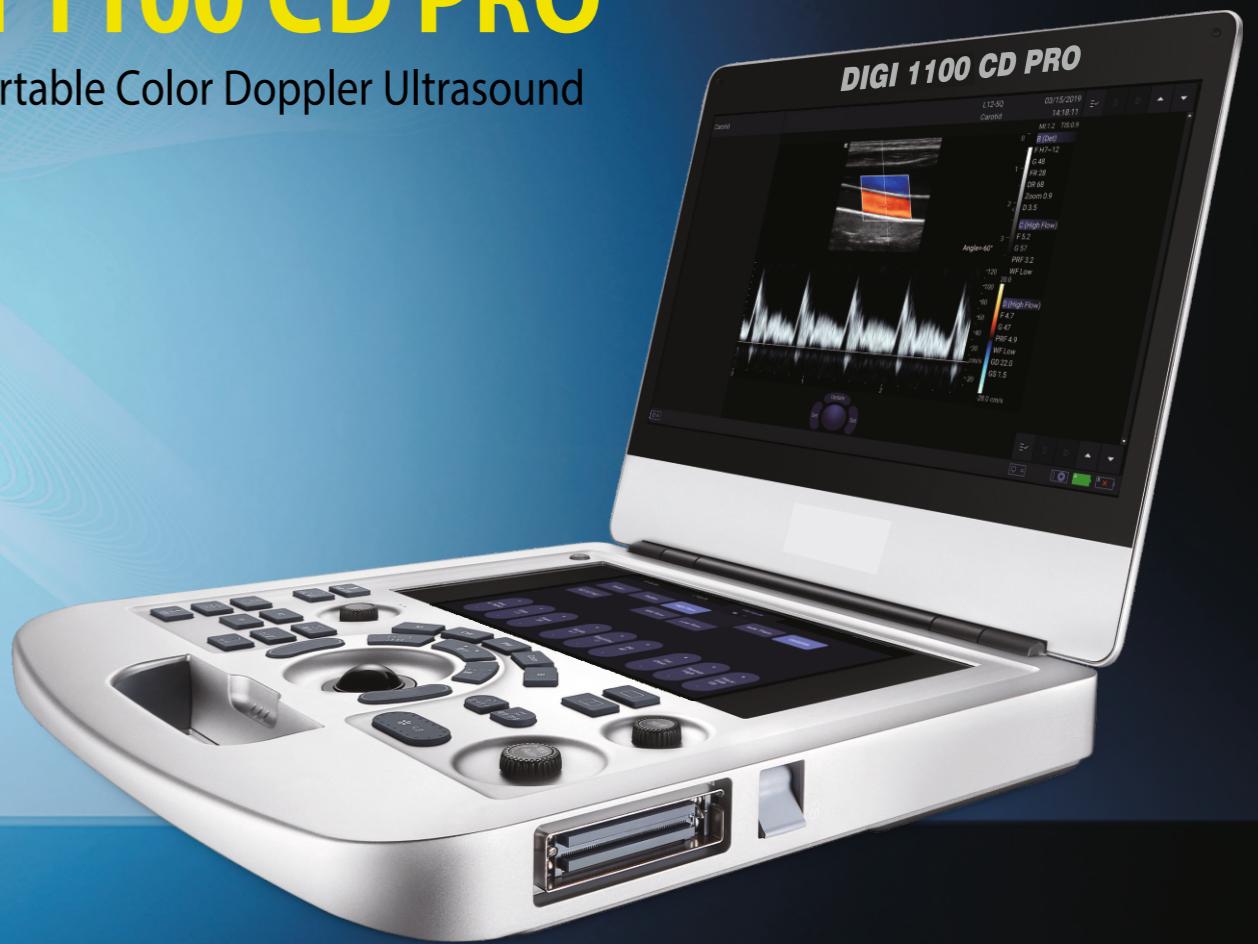

Ultimate lightweight experience with magnesium alloy body



Unique dual-batteries design support ultra-long continuous scanning up to than 2 hours



Ergonomics trolley system with semi-automatic lifting (Optional)



Multiple Transducer Connector (MTC) for extending probe ports up to 3 (Optional)




Customizable touch screen to personalize your user interface




Liver



Renal flow

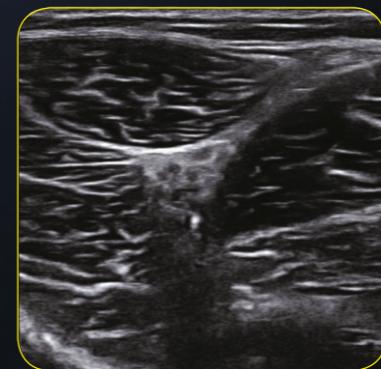

Sciatic Nerve Pop

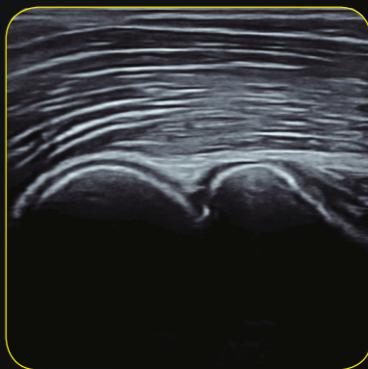

Elbow