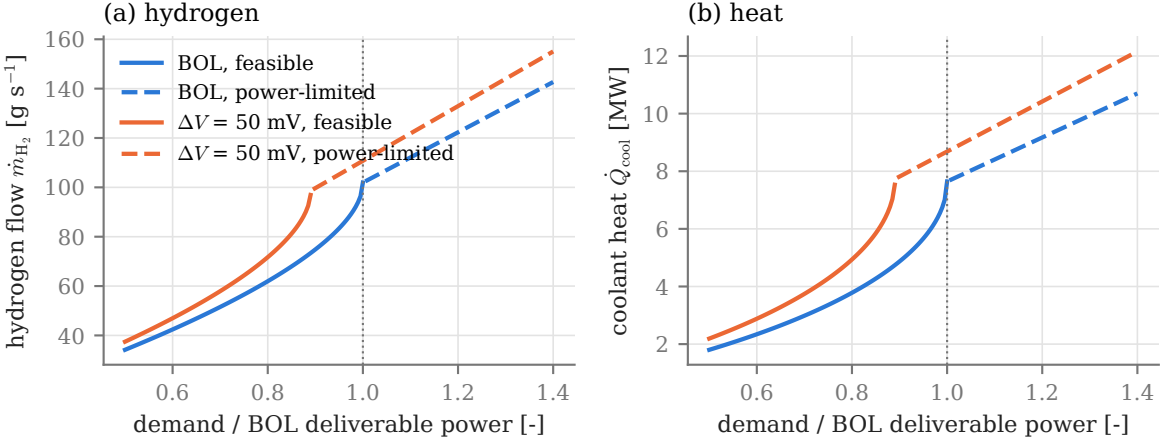
(a) hydrogen
(b) heat
BOL, feasible
BOL, power-limited
$\Delta V = 50$ mV, feasible
$\Delta V = 50$ mV, power-limited
hydrogen flow $\dot{m}_{H_2}$ [g s^{-1}]
coolant heat $\dot{Q}_{cool}$ [MW]
demand / BOL deliverable power [-]
demand / BOL deliverable power [-]
160
140
120
100
80
60
40
12
10
8
6
4
2
0.6
0.8
1.0
1.2
1.4