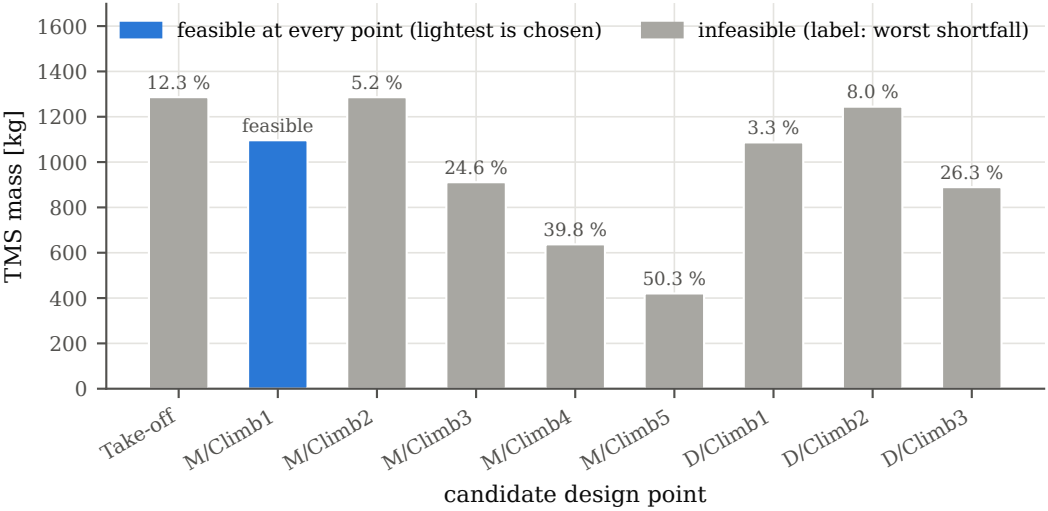
feasible at every point (lightest is chosen)
infeasible (label: worst shortfall)
TMS mass [kg]
0
200
400
600
800
1000
1200
1400
1600
12.3 %
feasible
5.2 %
24.6 %
39.8 %
50.3 %
3.3 %
8.0 %
26.3 %
Take-off
M/Climb1
M/Climb2
M/Climb3
M/Climb4
M/Climb5
D/Climb1
D/Climb2
D/Climb3
candidate design point