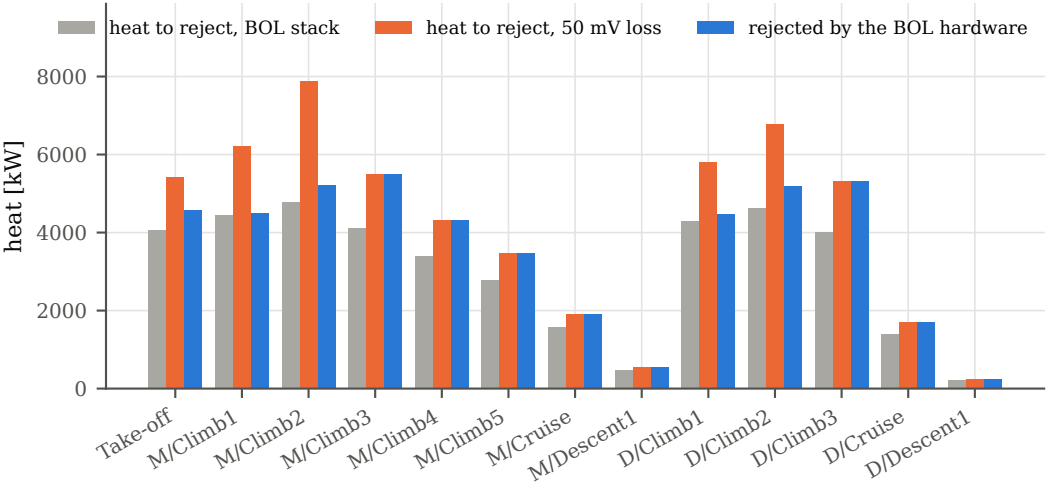
heat to reject, BOL stack
heat to reject, 50 mV loss
rejected by the BOL hardware
heat [kW]
8000
6000
4000
2000
0
Take-off
M/Climb1
M/Climb2
M/Climb3
M/Climb4
M/Climb5
M/Cruise
M/Descent1
D/Climb1
D/Climb2
D/Climb3
D/Cruise
D/Descent1