PLANS & EQUIPMENT

EQUIPMENT USED
Marking gauge
Bradawl
Mallet
15mm four-prong drive
Tailstock centre
20mm spindle roughing gouge
6mm bowl gouge
10mm bowl gouge
3mm parting tool
12mm skew chisel
Cellulose sanding sealer
Stitched mop 150mm
Looseleaf mop 150mm
Carnauba wax
Buff polishing compound
Tripoli polishing compound
Beech dowel as knock stick
Pigtail
Sanding disc
Cloves

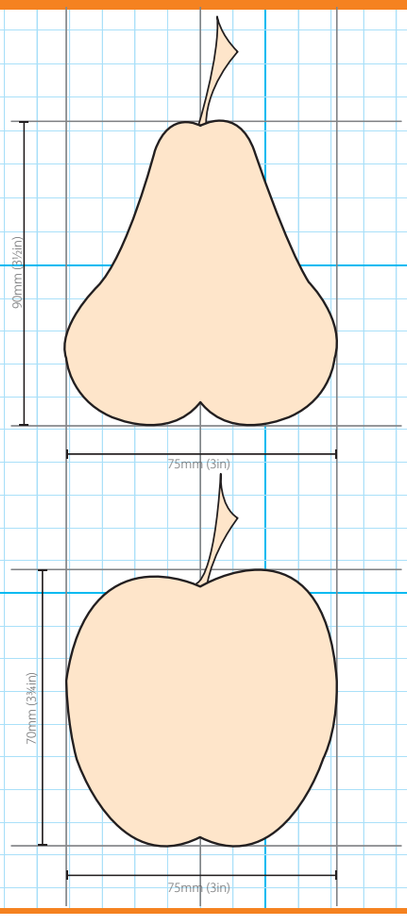

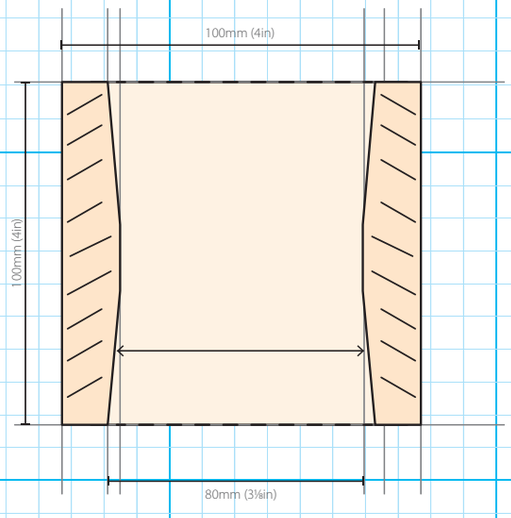

1

2

3

Turning the fruit using the jam chuck

1 For this batch of fruit, I prepared 30 pieces of timber in a variety of colours. Where possible, cut from longer lengths – after cutting the corners off on the bandsaw first – allowing you to keep the toolrest in the same place all day rather than having to move it after roughing. The timbers featured in this picture are a beautifully rosy red padauk (*Pterocarpus soyauxii*) and a green and white laburnum (*Laburnum anagyroides*)

2 Accurately centre up your blanks. I do all my centring up with a marking gauge because I rarely have corners on the blanks to use a rule on and very often have misshapen pieces. Here you can see how the marking gauge leaves an 'x' on this piece of spalted beech (*Fagus sylvatica*)

3 After centring up, tap in your chosen drive centre, making sure that you get a good grip. Accurate marking is essential to any job, but so is preparing the blanks. By marking and locating the drive in all the prepared blanks it saves time when turning due to everything being able to be picked up, located and fixed between centres quickly and ready to turn

WT_287_14_19_TURNING_FRUIT_COLWIN_WAYckjrmbSD.indd 15 06/11/2015 09:19