INFORMATION & PLANS

TOOLS REQUIRED
10mm spindle gouge
10mm parting and beading tool
2mm parting tool
25mm straight scraper
6mm carbide box hollower
Strip of Formica
Abrasives 120-240 grits
Cellulose sealer
Danish oil
Masking tape
PPE: Facemask, gloves, dust mask/ respirator

WOOD REQUIREMENTS
Olive ash (*Fraxinus excelsior*) square 80 X 80 X 170mm

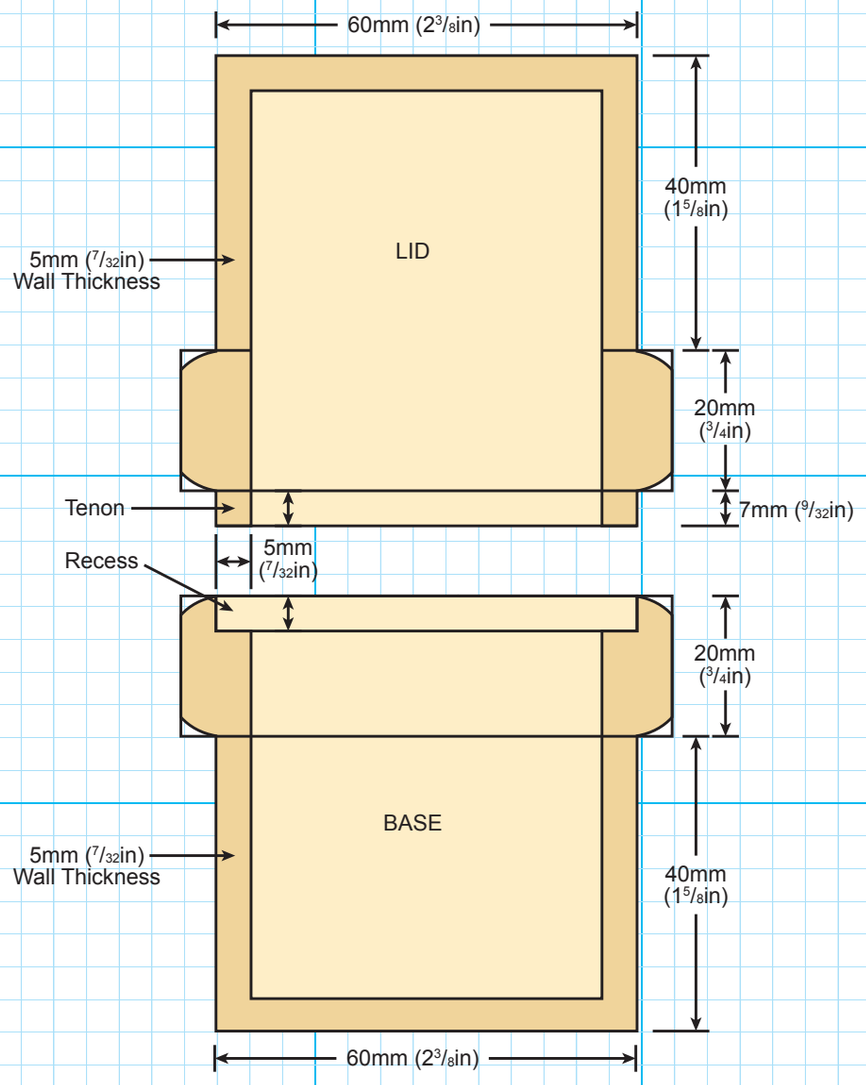

1 On one end of the blank, scribe a circle with a compass. Then place the point of the compass at the 3 o'clock position and scribe a line at the intersect with the circle. Move the point to the marked intersect and scribe the next line at the intersect with the circle. Continue until the scribed line intersects through the original compass hole at the 3 o'clock position

2 Now join the intersects by marking with a pencil line. This will form the hexagon shape

1

2

WT_287_45_49_ANDY_COATESckbdJRACSD.indd 46 06/11/2015 09:45