ALTERNATIVE METHODS FOR SEPARATING RINGS FOR A DISC

When you separate a ring off a disc you need to make sure it will not come loose, if it does a couple of things can happen. Firstly the parting tool can grab, secondly the ring could hit a part of the lathe or chuck and damage the ring. An alternative way of separating a ring from a piece held in the chuck is to use a backing piece of board and double-sided tape to hold what will become two parts together, you need to make sure that the item and the board are flat and parallel to each other for the double-sided tape to work.

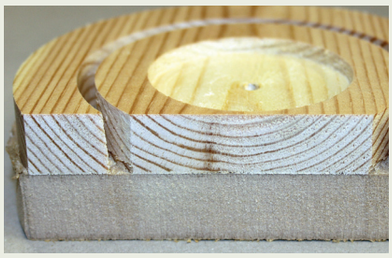

SANDING JIG FOR FINISHING THE TOP OF THE ARMS

This is a jig you can make and use for sanding flat parts on a lathe. I used a disc of MDF with a chucking point on the back, then turned this down to 150mm and added a self-adhesive sanding disc, I have made one for several grades of paper. Next I made a table. I turned a piece of timber down to the same size as the toolpost diameter at one end and a diameter to suit a drill bit, 30mm in my case. Next, I drilled a 30mm hole in a flat piece, you can glue two pieces together to make this thicker if needed. I assembled and glued the stem and table parts and it was ready to use. Run the lathe at a slow speed and use dust extraction.

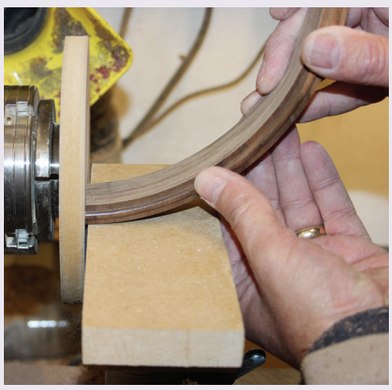

PLANS AND EQUIPMENT

EQUIPMENT USED
10mm bowl gouge
25mm French curve scraper
3mm parting tool
20mm skew
10mm spindle gouge with a fingernail profile

Timber requirements
Walnut (*Juglans regia*): ring 260 x 45mm, base 180 x 40mm, stem 145 x 40mm

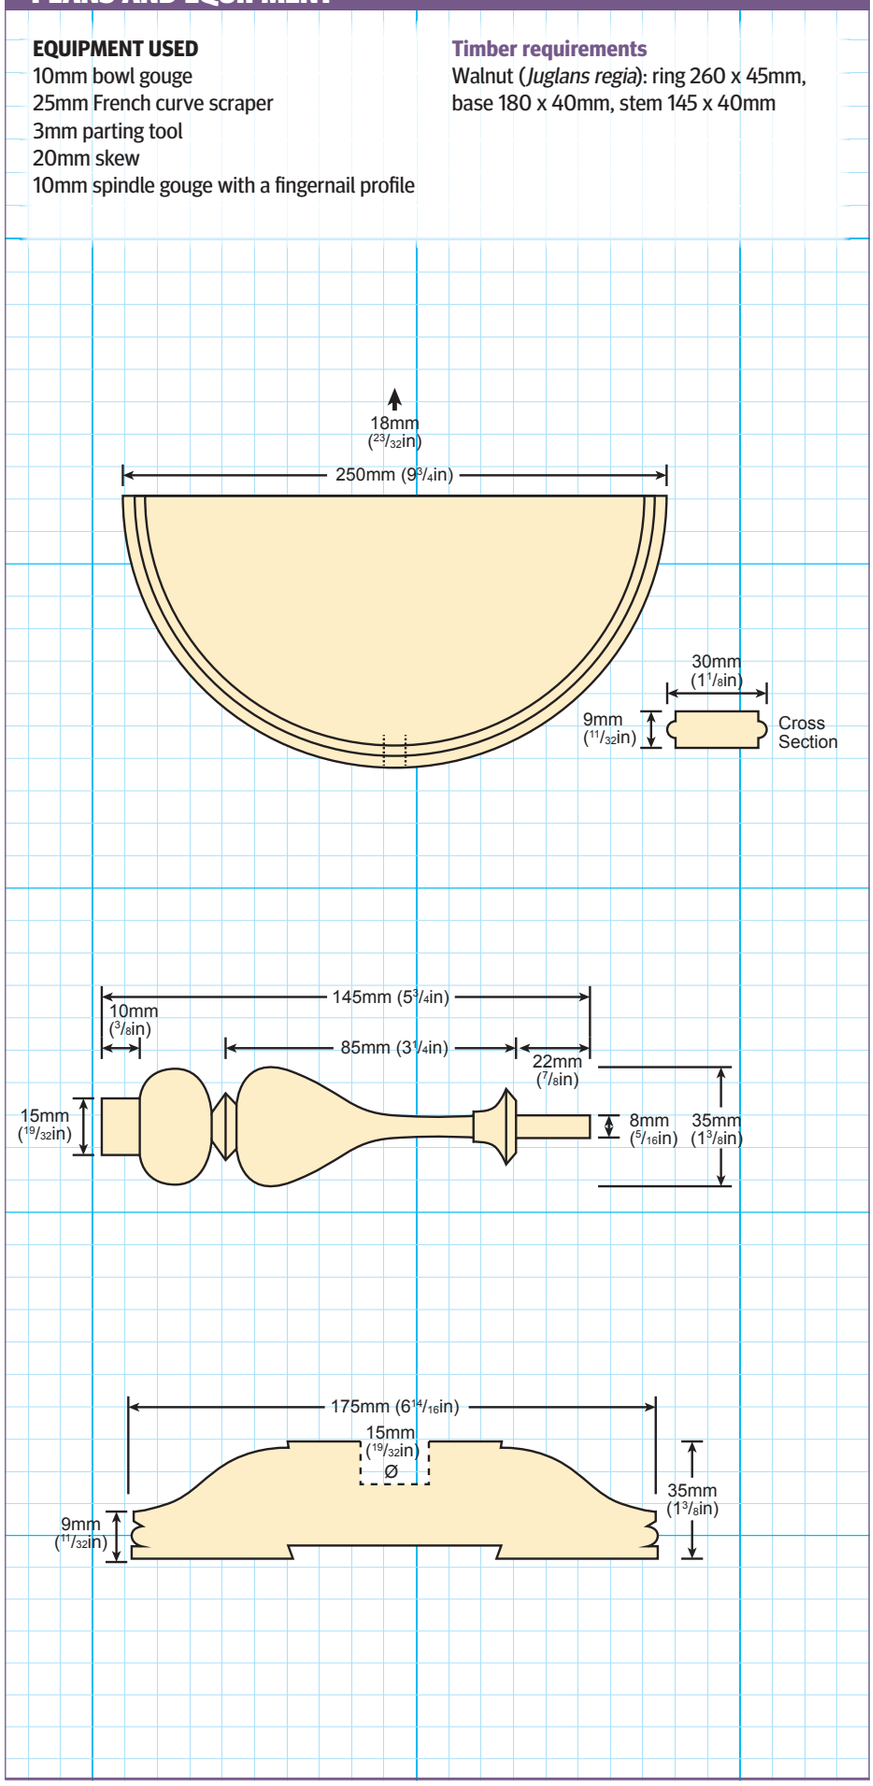

WT_289_87_90_PHILIP_GREENWOOD_bd, MBJRpgS.indd 88 22/12/2015 10:28